

# Avigilon Product Catalog

Video security and access control solutions



AVIGILON





software is combined with powerful, Al-enabled analytics that take your security system from passive observer to active partner.

With high-definition cameras that continuously scan, analyze and learn from their environment, you get unprecedented visual detail combined with situational awareness to inform the best response.

capabilities and integrations across the ecosystem that enable effortless sharing and collaboration.

At Motorola Solutions, we create a safer world.









55

56

57

58

59

60









# Contents

Unity Cameras & Sensors	6
Camera Lines Overview	7
H6A Dome Cameras	8
H6A Bullet Cameras	9
H6X Dome & Box Cameras	10
H6X Bullet Cameras	11
H6A PTZ Cameras	12
Unity H6SL Cameras	13
H6 Mini Dome Cameras	14
H5 Pro Cameras	15
Unity H5A Multisensor Cameras	16
H5A Fisheye Cameras	17
H5A Corner Cameras	18
H5A Dual Head Cameras	19
Unity H5A Modular Cameras	20
H5A PTZ Cameras	21
H5A IR PTZ Cameras	22
H5A Thermal Cameras	23
H5M Cameras	24
H4 Video Intercom	25
HALO Smart Sensor	26
FIPS Cryptography Support	27
Fixed Camera Accessories	28

Alta Cameras	32
Ava Flex Camera	33
Ava Compact Dome Camera	34
Ava Dome Camera	35
Ava Bullet Camera	36
Ava 360 Camera	37
Alta H6SL Cameras	38
Alta H5A Multisensor Cameras	39
Alta H5A Modular Cameras	40
Alta Camera Accessories	41

∘ ∘ Video Infrastructure	43
AI NVR 2	44
NVR6	45
Workstations	46
NVR6 FIPS	47
ENVR2 PLUS Appliance	48
HD Video Appliance 3X	49
Avigilon Video Archive	50
Al Appliance 2	51
IP Horn Speaker	52
Alta Cloud Connectors	53
Body-worn Cameras	54

VT100 Cameras

VB400 Cameras

DockController

Body-worn Accessories

Body-worn Camera Docks

RFID Reader & Accessories

Motorola Solutions Integrations	61
Concealed Weapons Detection	62
Orchestrate	63
Rave Mobile Safety	64
Rave Panic Button	65
Rave Alert	66


LPR Solutions	6/
VehicleManager Enterprise	68
L6A Enterprise LPR Camera	69
H4 License Plate Capture Cameras	70
L6Q LPR Camera System	71

Video Management Software	72
Avigilon Unity Video	73
Avigilon Unity Cloud Services	75
Avigilon Decision Management System	76
Smart Assurance Plan	77
VideoManager Software	78
Avigion Alta Video	79
_	
Unity Access Control	80
Unity Access Control  Avigilon Unity Access Solutions	80
Avigilon Unity Access Solutions	81
Avigilon Unity Access Solutions Unity Access Licensing	81 82
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System	81 82 83
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System Controllers & Sub-Panels	81 82 83 84
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System Controllers & Sub-Panels Readers & Credentials	81 82 83 84 85
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System Controllers & Sub-Panels Readers & Credentials Power Supplies	81 82 83 84 85 89
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System Controllers & Sub-Panels Readers & Credentials Power Supplies Wireless Lock Integrations	81 82 83 84 85 89
Avigilon Unity Access Solutions Unity Access Licensing Unity Access System Controllers & Sub-Panels Readers & Credentials Power Supplies Wireless Lock Integrations Federal Government Solutions	81 82 83 84 85 89 90

Alta Access Control	97
Avigilon Alta Access	98
Avigilon Smart Reader	99
Avigilon Smart Keypad Reader	100
Avigilon Embedded USB Smart Reader	101
Avigilon Video Reader Pro	102
Avigilon Video Intercom Reader Pro	103
Avigilon Core Series Smart Hubs	104
Avigilon Single Door Controller	106
Avigilon Access Control Core	107
Avigilon Expansion Boards	108
Avigilon Alta Wireless Lock Intergrations	109
Avigilon Alta Low & High Frequency Credentials	110

Intrusion Panels Integration

96

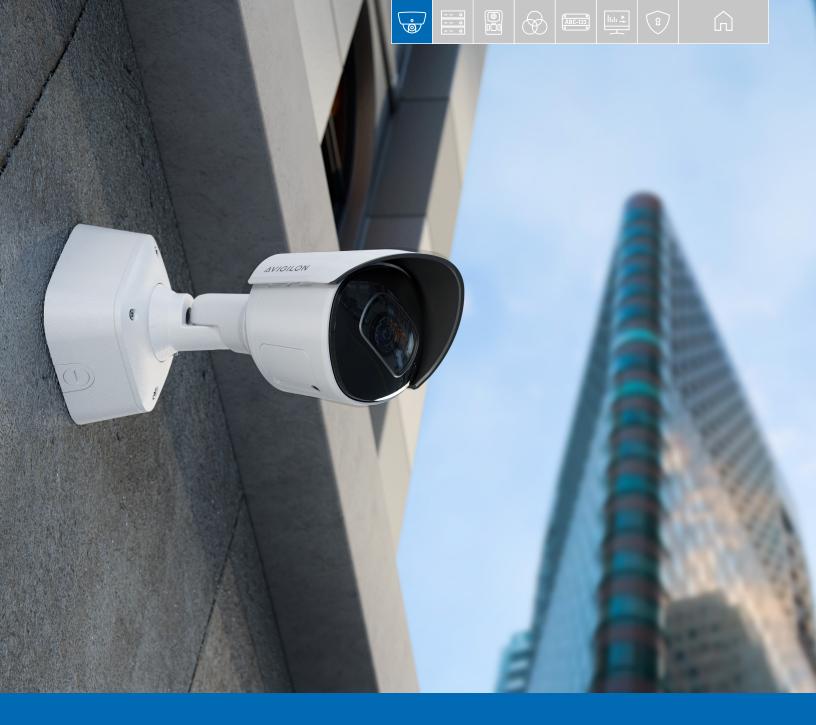



The Motorola Solutions Avigilon Unity on-premise portfolio offers a complete video security solution, with cutting-edge camera and sensor technologies that are embedded with features such as smart analytics to help focus your attention on the events that matter most. Our fixed camera portfolio includes cameras and technologies for any application, from 1−61 MP resolution in fixed, moving and multisensor options, to infrared (IR) and LightCatcher<sup>™</sup> technology to help you see more in dark environments, to a 360-degree view for broad coverage with fewer cameras.















### Avigilon Unity Camera Lines Overview

Available in four distinct camera lines, Avigilon Unity cameras are designed to meet you where you stand. Achieve the level of image detail you need and leverage the cameras' built-in analytic capabilities to address the unique challenges of your











MODEL NAME	H6A/H6X CAMERAS	H5A CAMERAS	H6SL CAMERAS	H6M CAMERAS	H5M CAMERAS
Summary	Future-proof your most critical sites with our most advanced cameras, delivering the latest cutting-edge analytics and imaging technology for unparalleled situational awareness.	Secure your site with powerful cameras that offer our core analytics and unique form factors to help solve your various safety and operational needs.	Combine versatility and high performance with these all-purpose cameras that can take on an extensive range of indoor and outdoor applications, including general security monitoring needs.	Start protecting your people and property in minutes with this indoor, no-frills cameat that provides optimal protection in a discreet design.	Designed for sites that want outdoor monitoring without advanced analytics, this value camera is up for the challenge with easy installation and a tough exterior.
Form factors	Dome Short & Long Bullet Box PTZ	Panoramic PTZ / IR PTZ Thermal Corner Modular	Dome Bullet	Dome	Dome
Analytic capabilities	Classified Object Detection Unusual Activity Detection Visible Firearm Detection (U.S. only) Crowd Detection Audio Analytics (dome and bullet only) Dynamic Privacy Masking Vehicle Subclass Alerts Person Crawling Detection Appearance Search Support Facial Recognition support	Classified Object Detection Unusual Activity Detection Appearance Search support Facial Recognition support	Classified Object Detection Unusual Activity Detection Appearance Search support* Facial Recognition support*	Classified Object Detection Unusual Activity Detection Appearance Search support* Facial Recognition support*	Unusual Motion Detection
Analytic detection distance	Long range	Long to short range (will vary with camera)	Mid range	Short range	Short range
Resolutions	2 through 8 MP	2 through 8 MP	2, 3, 5, 8 MP	2, 3, 5 MP	2, 5 MP
Image quality	Best	Excellent	Great	Good	Good
IR distance	Long range	Long to short range (will vary with camera)	Mid range	Short range	Short range
Lens options	Longer varifocal CS/iCS (box only)	Shorter varifocal	Shorter varifocal	Fixed	Fixed
	Signed and encrypted firmware Vulnerability scans Built-in TPM Secure Boot	Signed and encrypted firmware	Signed and encrypted firmware Vulnerability scans Built-in TPM Secure Boot	Signed and encrypted firmware Vulnerability scans	Signed and encrypted firmware
Environmental	Impact resistant NEMA 4X NEMA TS2 Indoor and outdoor variants	Impact resistant Indoor and outdoor variants	Impact resistant Indoor and outdoor variants	Indoor variants	Impact resistant Outdoor variants
Operating temperature	Wide range	Wide range	Mid range	Limited range	Mid range
					-

<sup>\*</sup> Coming late 2024

Need help with choosing? Connect with our team of experts today.

















### **H6A Dome Cameras**

MSRP from €821

Elevate your situational awareness to new heights with this powerful line of cameras that can run multiple edge-based analytics simultaneously.

### Specifications



MODEL NAME		INDOOR DOME		OUTDOOR DOME		
Part Number		2.0C-H6A-D2 6 2.0C-H6A-D1-IR 6.0 2.0C-H6A-D2-IR 6.0 4.0C-H6A-D1 8 4.0C-H6A-D2 8 4.0C-H6A-D1-IR 8.0	6.0C-H6A-D1-IR 2.00 6.0C-H6A-D2-IR 2.00 8.0C-H6A-D1 4.1 8.0C-H6A-D2 4.1 8.0C-H6A-D1-IR 4.00		02 6.0C-H6A-D02 1-IR 6.0C-H6A-D01-IR 2-IR 6.0C-H6A-D02-IR	
Resolution			2 MP, 4 MP, 6 I	MP, 8 MP		
Image Sensor		4	2 MP: 1/2.8" progressive scan CMOS 4 / 6 / 8 MP: 1/1.8" progressive scan CMOS			
Max. Dynamic Range (dB)		2 MP: 1	30 dB, 4 MP: 120 dB, 6	MP: 144 dB, 8 MF	P: 144 dB	
Max. Image Rate (50 Hz/60 Hz)		2 MP: 50 fps/60 fps,	4 MP: 50 fps/60 fps, 6	MP: 25 fps/30 fp	s, 8 MP: 25 fps/30 fps	
Environmental		IK11, IP66/67/68, IK10 NEMA Type 4X, NEMA TS2				
LENS & IR ILLUMINATION		2.8-12 MM LENS	4.4-9.3 MM	LENS	10.9-29 MM LENS	
Max. IR Illumination Distance (high power 850 nm LEDs)		50 m (164 ft) full tele 25 m (82 ft) full wide				
	2 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.01 lux in color mode	N/A		With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	
Min. Illumination	4 MP	N/A	With IR: 0 lux in n Without IR: 0.003 lux 0.008 lux in co	in mono mode;	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	
(at 33 ms shutter speed)	6 MP	N/A	With IR: 0 lux in r Without IR: 0.006 lux 0.02 lux in col	in mono mode;	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	
	8 MP	N/A	With IR: 0 lux in r Without IR: 0.006 lux 0.02 lux in col	in mono mode;	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	
	2 MP	27° – 119° (H), 15° – 64° (V)	N/A		11° - 30° (H), 6° - 16.5° (V)	
Horizontal Field of View (H)	4 MP	N/A	47° – 111° (H), 2	6° – 57° (V)	15° – 42° (H), 9° – 23° (V)	
& Vertical Field of View (V) (16:9)	6 MP	N/A	47° – 109° (H), 2	6° – 57° (V)	15° – 42° (H), 9° – 23° (V)	
	8 MP	N/A	47° – 109° (H), 2	6° – 57° (V)	15° – 42° (H), 9° – 23° (V)	

### Key features







Camera-based Visible Firearm Detection analytics<sup>1</sup>





Conformant with ONVIF® Profile S, T, G and M



FIPS-Compliant Cryptography Available<sup>1</sup> Integrated TPM & Secure Boot



H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG









Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.















### **H6A Bullet Cameras**

MSRP from €1,125

Elevate your situational awareness to new heights with this powerful line of cameras that can run multiple edge-based analytics simultaneously.

### Specifications





Max. Dynamic Range (dB) Max. Image Rate (50 Hz/60 Hz)	2 MP, 4 MP, 6 MP, 8 MP  2 MP: 1/2.8" progressive scan CMOS  4 / 6 / 8 MP: 1/1.8" progressive scan CMOS  2 MP: 130 dB, 4 MP: 120 dB, 6 MP: 144 dB, 8 MP: 144 dB  2 MP: 50 fps/60 fps, 4 MP: 50 fps/60 fps, 6 MP: 25 fps/30 fps, 8 MP: 25 fps/30 fps		
Image Sensor			
Resolution			
Part Number	4.0C-H6A-B01-IR 6.0C-H6A-B01-IR 8.0C-H6A-B01-IR	4.0C-H6A-B02-IR 6.0C-H6A-B02-IR 8.0C-H6A-B02-IR	
	2.0C-H6A-B01-IR	2.0C-H6A-B02-IR	
MODEL NAME	SHORT BULLET	LONG BULLET	

NEMA Type 4X, NEMA TS2

			NEIVIA TYPE 4A, NEIVIA 132	
LENS & IR ILLUMINATION		2.8-12 MM LENS (SHORT BULLET ONLY)	4.4-9.3 MM LENS (SHORT BULLET ONLY)	4.5-148.5 MM & 6.9-214.6 MM LENSES (LONG BULLET ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)		50 m (164 ft), full tele 30 m (98 ft), full wide	70 m (229 ft), full tele 30 m (131 ft), full wide	170m (558 ft), full tele 40m (131ft), full wide
Min. Illumination (at 33 ms shutter speed)	2 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.01 lux in color mode	N/A	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
	4 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
	6 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
	8 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
	2 MP	27° - 119° (H), 15° - 64° (V)	N/A	3.4° - 61° (H), 1.9° - 37° (V)
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	4 MP	N/A	47° - 111° (H), 26° - 57° (V)	2.9° - 62.5° (H), 1.6° - 36° (V)
	6 MP	N/A	47° - 109° (H), 26° - 57° (V)	2.9° - 62.5° (H), 1.6° - 36° (V)
	8 MP	N/A	47° - 109° (H), 26° - 57° (V)	2.9° - 62.5° (H), 1.6° - 36° (V)

### Key features Camera-based Visible Firearm Detection analytics<sup>1</sup> FIPS-Compliant Cryptography Available<sup>1</sup> Integrated TPM & Secure Boot Conformant with ONVIF® Profile S, T, G and M SmartCodec™ Technology, Motion JPEG

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.















### H6X Dome & Box Cameras

MSRP from €775

Easily meet certain privacy requirements with this flexible line of cameras that features H6A capabilities, but have been designed with no built-in mic for effortless compliance.


### Specifications





MODEL NAME	INDOOR / OU	INDOOR / OUTDOOR DOME		X	
Part Number	4.0C-H6X-D01-IR 4.0C-H6X-D02-IR	8.0C-H6X-D01-IR 8.0C-H6X-D02-IR	2.0C-H6X-B 4.0C-H6X-B	6.0C-H6X-B 8.0C-H6X-B	
Resolution	4 MP, 6 M	4 MP, 6 MP, 8 MP		6 MP, 8 MP	
Image Sensor	1/1.8" progress	1/1.8" progressive scan CMOS		ogressive scan 3" progressive scan CMOS	
Max. Dynamic Range (dB)	4 MP : 120 dB		2 MP : 150 dB		
Max. Dynamic Range (ub)	6 MP / 8MP : 144 dB		4 MP/ 6 MP / 8 MP: 144 dB		
Max. Image Rate (50 Hz/60 Hz)	4 MP : 50 fps/60 fps		2 MP / 4 MP : 50 fps/60 fps		
wax. Image Rate (30 Hz/00 Hz)	6 MP / 8MP :	6 MP / 8MP : 25 fps/30 fps		6 MP / 8MP : 25 fps/30 fps	
Environmental	IK10	10 IK11, IP66/67/68, NEMA Type 4X, NEMA TS2 N/A		Ά	

LENS & IR ILLUMINATION		4.4-9.3 MM LENS (DOME)	10.9-29 MM LENS (DOME)	MULTIPLE LENS OPTIONS (BOX ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)		50 m (164 ft) full tele 25 m (82 ft) full wide	70 m (230 ft) full tele 40 m (131 ft) full wide	N/A
Min. Illumination (at 33 ms shutter speed)	2 MP	N/A	N/A	0.01 lux in color mode, 0.003 lux in mono mode at f/1.4
	4 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	0.008 lux in color mode, 0.003 lux in mono mode at f/1.3
	6 MP	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	0.02 lux in color mode, 0.006 lux in mono mode at f/1.3
	8 MP	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	0.02 lux in color mode, 0.006 lux in mono mode at f/1.3
	4 MP	47° – 111° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)	N/A
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	6 MP	47° – 109° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)	N/A
2 10:102.1.0.2 0: 1.0W (*) (10.5)	8 MP	47° – 109° (H), 26° – 57° (V)	15° - 42° (H), 9° - 23° (V)	N/A

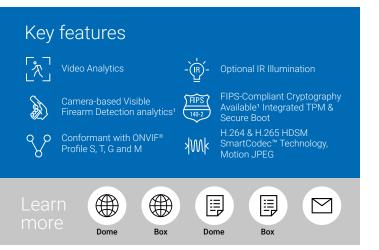

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required – see page 27.















MSRP from €1,528



### **H6X Bullet Cameras**

Easily meet certain privacy requirements with this flexible line of cameras that features H6A capabilities, but have been designed with no built-in mic for effortless compliance.

### Specifications





·			
MODEL NAME	SHORT BULLET	LONG BULLET	
Part Number	4.0C-H6X-B01-IR 8.0C-H6X-B01-IR	4.0C-H6X-B02-IR 8.0C-H6X-B02-IR	
Resolution	4 MP, 8 MP		
Image Sensor	1/1.8" progressive scan CMOS		
Max. Dynamic Range (dB)	4 MP : 1	20 dB	
max. Dynamio Range (ab)	8 MP : 1	44 dB	
Max. Image Rate (50 Hz/60 Hz)	4 MP : 50 fps/60 fps		
Max. Illiage Nate (30 112/00 112)	8 MP : 25 fps/30 fps		
Environmental	IK10, IP66/67/68, NEMA Type 4X, NEMA TS2		

LENS & IR ILLUMINATION		4.4-9.3 MM LENS (SHORT BULLET)	4.5-148.5 MM & 6.9-214.6 MM LENSES (LONG BULLET ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)		70 m (229 ft), full tele 30 m (131 ft), full wide	170m (558 ft), full tele 40m (131ft), full wide
Min. Illumination	4 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
(at 33 ms shutter speed)	8 MP	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	4 MP	47° – 111° (H), 26° – 57° (V)	2.9° - 62.5° (H), 1.6° - 36° (V)
	8 MP	47° - 109° (H), 26° - 57° (V)	2.9° - 62.5° (H), 1.6° - 36° (V)

### Key features FIPS-Compliant Cryptography Available<sup>1</sup> Integrated TPM & Camera-based Visible Firearm Detection analytics<sup>1</sup> H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG Conformant with ONVIF® Profile S, T, G and M

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.















### H6A PTZ Cameras

MSRP from €3,045

Cover large areas, proactively detect incidents and capture fast-moving objects with this powerful indoor and outdoor PTZ.

### Specifications





INDOOR IN-CEILING 2.0C-H6A-PTZ-DC30 4.0C-H6A-PTZ-DC30	INDOOR/OUTDOOR PENDANT 2.0C-H6A-PTZ-DP30 4.0C-H6A-PTZ-DP30		
4.0C-H6A-PTZ-DC30			
	4.00-H0A-F1Z-DF30		
2	MP, 4 MP		
1/1.8" progressive scan CMOS			
122 dB			
2 MP : 50 fps/60 fps, 4 MP : 25 fps/30 fps			
IK09	IK09/10, IP66/67, NEMA Type 4X, NEMA TS2		
6.5 mm to 162	2.5 mm, F/1.6 – F/4.8		
58.1 x 34.8 (H), 2.3 x 1.4 (V)			
30x Enhanced Optical			
Remote Zoom and Focus, Autofocus, IR Cut Filter, Auto Iris			
	1/1.8" progr 2 MP : 50 fps/60 IK09 6.5 mm to 162 58.1 x 34.8 30x Enh		

### Key features



Video Analytics with Auto-Tracking



Wide Dynamic Range Support



H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG





Conformant with ONVIF® Profile S, T, G and M



FIPS-Compliant Cryptography Available<sup>1</sup>, Integrated TPM & Secure Boot







Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Full Duplex Line level input and output
External I/O Terminals	3x Alarm In (3.5VDC/3.5mA MAX), 1x NO Relay Out (32VDC/150mA MAX), 1x Digital Out (13VDC MAX), 1x 12VDC source (11~13VDC/140 mA MAX)
External Power Source	Aux 24 VDC/VAC +/- 10%
PoE Power Source	In-ceiling: IEEE 802.3 at Type 2, Class 4 compliant Pendant: IEEE 802.3at Type 2, Class 4 compliant IEEE802.3bt Type 3, Class 6 compliant IEE802.3bt Type 4, Class 8 compliant
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.















### Unity H6SL Cameras

MSRP from €489

Protect people and property effortlessly with this versatile, analytics-enabled camera line that can fit into an extensive range of indoor and outdoor applications.

### Specifications







MODEL NAME		INDOOR DOME		OUTDOO	DR DOME		BULLET
Part Number		2.0C-H6SL-D1-IR 5.0C	-H6SL-D1 2. H6SL-D1-IR :			3.0C-H6SI	L-B01-IR 5.0C-H6SL-B01-IR L-B01-IR 5.0C-H6SL-B02-IR L-B02-IR 8.0C-H6SL-B01-IR
Resolution		2 MP, 3 MP, 5 MP, 8 MP					
Image Sensor				1/2.8" progress	sive scan CMOS		
Max. Dynamic Range (dB)			2 MP: 126	dB, 3 MP: 130 dB,	, 5 MP: 130 dB,8 MF	2: 130 dB	
Max. Image Rate (50 Hz/60 Hz)		2 MP: 50	fps/60 fps, 3 N	MP: 25 fps/30 fps,	5 MP: 25 fps/30 fp	s, 8 MP: 25	fps/30 fps
Environmental		IK10		IK10, IP66/	67, Type 4X	IK	10, IP66/67, Type 4X
LENS & IR ILLUMINATION		3.4-10.5 MM LENS (DOME)		.5 MM LENS ULLET)	10.9-29 MM L (BULLET ON		4.4-9.3 MM LENS (BULLET ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)	2 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	`	64 ft), full tele 00 ft), full wide	N/A		N/A
	3 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	,	31 ft), full tele 5 ft), full wide	70 m (230 ft), fu 30 m (100 ft), fu		N/A
	5 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	,	31 ft), full tele 5 ft), full wide	70 m (230 ft), fu 30 m (100 ft), fu		N/A
	8 MP	N/A			N/A		50 m (164 ft), full tele 30 m (100 ft), full wide
	2 MP	With IR: 0 lux in mono Without IR: 0.01 lux in color; 0.005 lux in mono		N/A		N/A	
Min. Illumination	3 MP	With IR: 0 lux in mono Without IR: 0.04 lux in color; 0.02 lux in mono			N/A		
(at 33 ms shutter speed)	5 MP	With IR: 0 lux in mono Without IR: 0.04 lux in color; 0.02 lux in mono				N/A	
	8 MP	N/A		N/A		With IR: 0 lux in mono Without IR: 0.02 lux in color; 0.01 lux in mono	
Horizontal Field of View (H)	2 MP	101° - 31° (	H), 53° - 17° (V	′)	N/A		N/A
	3 MP	95° - 28° (F	H), 69° - 21° (V)	)	28° - 10° (H), 21°	- 7° (V)	N/A
& Vertical Field of View (V)	5 MP	95° - 28° (H	H), 69° - 21° (V)	)	28° - 10° (H), 21°	- 7° (V)	N/A
	8 MP		N/A		N/A		103° - 47° (H), 54° - 26° (V)

### Key features Conformant with ONVIF® Profile S, T, G and M FIPS-Compliant Cryptography Available<sup>1</sup> Integrated TPM & SmartCodec™ Technology, Motion JPEG Bullet Dome

G.711 PCM 8 kHz, Opus
Line level input and output
Alarm In, Alarm Out
Optional microphone accessory sold separately (Indoor Dome model only)
IEEE 802.3af Class 3 compliant, 12VDC Aux (Bullet only)
microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.

















### H6 Mini Dome Camera

MSRP from €279

Protect indoor spaces with this small yet mighty camera that combines high-quality images of up to 5 MP, a wide field of view and efficient bandwidth management in a compact design.

### Specifications

MODEL NAME





WODEL WANTE	Z WII TIO WIIN DOWLE	O IVII TIO IVIII DOIVIL	O IVII TTO IVIII DOIVIL		
Part Number	2.0C-H6M-D1-IR 2.0C-H6M-D1	3.0C-H6M-D1-IR 3.0C-H6M-D1 3.0C-H6M-D2-IR	5.0C-H6M-D1-IR 5.0C-H6M-D2-IR		
Resolution	2.0 MP	3.0 MP	5.0 MP		
lmage Sensor		1/2.8 " Progressive Scan CMOS			
Max. Dynamic Range (dB)		WDR Off: 100 dB WDR On: 120 dB			
Max. Image Rate		(50 Hz/60 Hz): 25 fps/30 fps			
Environmental		N/A			
Operating Temperature		-10 °C to +50 °C (14 °F to 122 °F)			
LENS & IR ILLUMINATION	2 MP H6 MINI DOME	3 MP H6 MINI DOME	5 MP H6 MINI DOME		
Lens	2.95 mm fixed	D1: 2.95 r D2: 2.4 n			
IR Illumination (high power 850 nm LEDs)		10 m (33 ft) max. distance at 0 lux			
Horizontal Field of View (HFOV)	(16:9) 108°	D1: 100° D2: 123°			
Vertical Field of View (VFOV)	(16:9) 61°	D1: (4:3) 75°   16:9) 54° D2: (4:3) 93°   (16:9) 69°			
	With IR: 0	With IR: 0 Without IR: 0.01 lux in mono mode; 0.02 lux in color mode			

### Key features Wide Dynamic Range Support Profile S, T and G SmartCodec™ Technology, Motion JPEG Cryptography Available<sup>1</sup> Optional IR Illumination Quick & Easy Installation

Audio Input/Output	N/A
External I/O Terminals	N/A
Power Consumption	6 W
Power Source	PoE: IEEE 802.3af Class 2 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.

















### H5 Pro Cameras

The Avigilon H5 Pro Camera Line captures the best-in-class image details over vast areas, providing maximum coverage options through our most powerful and innovative ultra high definition cameras yet.

### Specifications



Model Name	8 MP (4K ULTRA HD) H5 PRO	16 MP H5 PRO	26 MP H5 PRO	40 MP H5 PRO	61 MP H5 PRO
Part Number	8C-H5PRO-B	16C-H5PRO-B	26C-H5PRO-B	40C-H5PRO-B	61C-H5PRO-B
Resolution	8 MP (4K)	16 MP (5K)	26 MP (6K)	40 MP (8K)	61 MP (10K)
Image Sensor (progressive scan CMOS)	27.2 mm (Type 1.8)			43.3 mm	(Type 2.7)
Max. Dynamic Range	**=***		WDR Off: 70 dB WDR On: 120 dB		
Max. Image Rate (50 Hz / 60 Hz)	WDR Off: 25 fps / 24fps WDR On: 16.7 fps / 17.1 fps		16:9: 16.7 fps / 17.1 fps 3:2: 14.3 fps / 15 fps	WDR Off: 10 fps WDR On: 8.3 fps / 8.6 fps	3:2: 7 fps 16:9: 8.3 fps / 8.6 fps
Max. IR Illumination Distance	-				
Environmental	IP66 rating for water resistance with optional appropriate housing				
Lens	Dependent on selected lens capability – see page 28 for lens options				

### Key features





Avigilon Appearance Search Technology<sup>1</sup>



Cryptography Available<sup>2</sup>



Extended Temperature Range



Technology



Audio Recording Capabilities<sup>3</sup>





Facial Recognition Technology<sup>1</sup>



Conformant with ONVIF® Profile S, T¹ and G





H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG



Wide Dynamic Range



No Face Mask Detection & Occupancy Counting<sup>1</sup>







Opus, G.711 PCM 8 kHz		
Line level I/O, A/V mini-jack (3.5mm)		
Alarm in, alarm out		
VDC: 12 V ± 10%, 18 W; VAC: 24 V ± 10%, 21 VA		
IEEE802.3at Class 4 compliant		
2xmicroSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.		

<sup>&</sup>lt;sup>1</sup> Not available on H5 Pro 61 MP models.

<sup>&</sup>lt;sup>2</sup> Additional license required — see page 27.

<sup>&</sup>lt;sup>3</sup> Optional.















### Unity H5A Multisensor Cameras

MSRP from €1,785

Ensure your site is covered from all angles by combining AI-powered video analytics and three or four adjustable sensors into one powerful solution.





#### Specifications

opcomoations				
Model Name	3-SENSOR		4-SENSOR	
Part Number	9C-H5A-3MH 15C-H5A-3MH 24C-H5A-3MH		12C-H5A-4MH 20C-H5A-4MH 32C-H5A-4MH	
Resolution (total / per sensor)	9 MP / 3 MP 15 MP / 5 MP 24 MP / 8 MP		12 MP / 3 MP 20 MP / 5 MP 32 MP / 8 MP	
Image Sensor		1/2.8" CMOS		
Dynamic Range	WDR On: 120 dB, WDR Off: 80 dB			
Max. Image Rate (high frame rate mode; per sensor; 60 Hz / 50 Hz)	3 MP: 60 / 50 fps 5 MP: 40 / 33 fps 8 MP: 24 / 25 fps		3 MP: 40 / 33 fps 5 MP: 30 / 25 fps 8 MP: 20 / 20 fps	
Environmental	IK10, IP66/67, NEMA 250 Type 4X, NEMA TS2			
LENS (PER SENSOR) & IR ILLUMINATION	3.3-5.7MM LENS			
	3 MP	5 MP	8 MP	
Max. IR Illumination Distance (high power 850 nm LEDs)	30 m (98 ft) maximum distance at 0 lux when camera is mounted at 4 m (13 ft) off the ground			
Min. Illumination	0.020 lux (F1.5) in color mode 0.018 lux (F1.5) in mono mode 0 lux with optional IR illuminator	0.020 lux (F1.5) in color mode 0.018 lux (F1.5) in mono mode 0 lux with optional IR illuminate	e 0.016 lux (F1.5) in mono mode	
Lens and Horizontal Field of View	53° - 97° (16:9)	53° - 97° (16:9)	58° - 106° (16:9)	

53° - 99° (4:3)

### Key features

**Based on Aspect Ratio** 







Conformant with ONVIF® Profile S, T, G and M



FIPS-Compliant Cryptography Available<sup>1</sup>, Integrated TPM and Secure Boot



H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG



Rated IK10 for vandal resistance



Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance



Meets NEMA TS<sup>2</sup> standards for traffic monitoring









### Audio, power & storage

53° - 99° (4:3)

Opus, G.711 PCM 8 kHz		
Line level input and output		
Alarm in, alarm out		
24 VDC ± 10 %; 24 VAC rms ± 10 %, 50 or 60 Hz		
In-Ceiling Mount: 30 W IEEE 802.3at Type 2 (PoE+) Surface and Pendant Mounts: With IR: 60 W (PoE++): IEEE 802.3bt Type 3, Cisco® UPoE or legacy high-power PoE Up to 35% IR Power or without IR: 30 W IEEE 802.3at Type 2 (PoE+)		
Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended. The dual SD cards will work as one contiguous region of storage.		

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.

43° - 74° (4:3)















### H5A Fisheye Cameras

MSRP from €730

Provides 360° panoramic views of large areas from a single vantage point. Offers superior situational awareness with no blind spots for a cost-effective solution, along with multiple mounting and accessory options for easy installation.





### Specifications

MODEL NAME		SURFACE MO	DUNT DOME	IN-CEILING MOUN	IT INDOOR DOME
Part Number with Optional I	R Illuminators	8.0C-H5A-FE-D01 8.0C-H5A-FE-D01-IR	12.0W-H5A-FE-D01 12.0W-H5A-FE-D01-IR	8.0C-H5A-FE-DC1	12.0W-H5A-FE-DC1
Resolution		8 MP	12 MP	8 MP	12 MP
Active Pixels		2048 x 2048	3008 x 3008	2048 x 2048	3008 x 3008
Image Sensor (p	progressive scan CMOS)	1/1.8"	1/2.3"	1/1.8"	1/2.3"
Max. Dynamic R	Range		120	+ dB	
Max. Image Rate (50 Hz / 60 Hz) 25 fps / 30 fps					
Max. IR Illumination Distance (high power 850 nm LEDs, at 0 lux)		17 m (55 ft)	12 m (39 ft)	-	-
Environmental		IK10 Impact Rating, IP66 and IP67 Weather Rating IP5X Rating			Rating
LENS					
	Field of View	360°	-	360°	-
Fisheye, 1.4 mm, F/2.0	Minimum Illumination (color / mono)	With IR: 0 lux Without IR: (0.2 lux / 0.1 lux)	-	Without IR: (0.2 lux / 0.1 lux)	-
Fisheye, 1.6 mm, F/2.0	Field of View	-	360°	-	360°
	Minimum Illumination (color / mono)	-	With IR: 0 lux Without IR: (0.38 lux / 0.19 lux)	-	Without IR: (0.38 lux 0.19 lux)

### Key features Avigilon Appearance Search Technology Technology<sup>2</sup> Conformant with ONVIF® Profile S, T and G Wide Dynamic Range Support H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG FIPS-Compliant Cryptography Available<sup>1</sup>

Audio Compression Method	Opus, G.711 PCM 8 kHz	
Audio Input/Output	Line level input and output and built-in microphone (can be enabled)	
External I/O Terminals	Alarm in, alarm out	
External Power Source	With IR: VDC: 12 V ±10%, 26 W min Without IR: VDC: 12 V ±10%, 11 W min	
PoE Power Source	With IR: PoE+: IEEE 802.3at Class 4 Without IR: PoE: IEEE 802.3af Class 3	
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended. Currently one of the two SD card slots is available for onboard storage.	

<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.







 $<sup>^{\</sup>rm 2}\,\mbox{Adaptive IR}$  technology available on surface mount only.















MSRP from €1,232



### H5A Corner Cameras

Anti-ligature, no-grip and vandal-resistant, the H5A Corner camera can handle the harshest attempts to destroy, detach, attach to or disable it in high-risk environments.





### Specifications

Model Name		H5A CORNER, STAINLESS STEEL		H5A CORNER, COLD-ROLLED STEEL		
Part Number		<b>R</b> C-H5A-	CR1-IR-SS	R C-H5A-CR1-IR		
Resolution ()		3 MP	5 MP	3 MP	5 MP	
Image Sensor			1/2.8" progressive scan CMOS			
Max. Dynamic	Range	WDR Off: 83 dB WDR On: 126 dB				
Max. Image Rate (50 Hz / 60 Hz)		WDR Off: 25 fps / 30 fps WDR On: 20 fps / 20 fps				
Max. IR Illumination Distance1 (high power 940 nm LED)		15 m (49 ft)				
Environmental		IP66 and IP67 Weather Rating, NEMA 4X Enclosure Rating, IK10+ Impact Rating IK10+ Impact Rating				
LENS (Remote	Zoom and Focus)					
Horizontal Angle of View (16:9 and 4:3)		34° – 105°				
3 - 9 mm,	Vertical Angle of View (16:9 / 4:3)	19° – 57° / 26° – 77°				
F1.3, P-Iris  Minimum Illumination (color / mono)		0.027 lux in color mode, 0.014 lux in mono mode, 0 lux with IR				

### Key features









Facial Recognition



Wide Dynamic Range Support



Conformant with ONVIF® Profile S, T and G



FIPS-Compliant Cryptography Available<sup>2</sup>



H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG





Invisible IR LED Light







White





### Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz		
Audio Input/Output	Line level I/O or built-in microphone		
External I/O Terminals	Alarm In, Alarm Out		
External Power Source	VDC: 12 V ± 10%, 12 W min; VAC: 24 V ± 10%, 13 VA min		
PoE Power Source	IEEE802.3af Class 3 compliant		
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.		

<sup>&</sup>lt;sup>1</sup>IR illumination power may be reduced at higher operating temperatures.

Part number varies based on camera resolution (3).

<sup>&</sup>lt;sup>2</sup> Additional license required – see page 27.
















### H5A Dual Head Cameras

MSRP from €1,358

The Avigilon H5A Dual Head Camera is a cost-effective and low profile dual-sensor camera that brings enhanced security to any site, by increasing coverage and minimizing blind posts for those hard to secure areas.

### **Specifications**

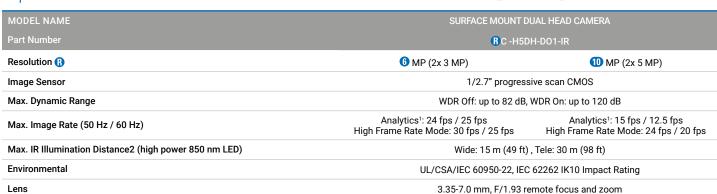

### **Key Features**





Avigilon Appearance



Range Support



Cryptography Available<sup>3</sup>









Facial Recognition



Profile S and T





SmartCodec Technology, Motion JPEG





Audio Recording Capabilities (Optional)







### Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz		
Audio Input/Output	Line level I/O		
External I/O Terminals	Alarm In, Alarm Out		
External Power Source	13W max		
PoE Power Source	IEEE802.3af Class 3 compliant		
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.  Currently one of the two SD card slots is available for onboard storage.		

<sup>&</sup>lt;sup>1</sup> Maximum image rate with analytics enabled on all sensors.

Part number varies based on camera resolution (3)

<sup>&</sup>lt;sup>2</sup> IR illumination power may be reduced at certain operating temperatures.

<sup>&</sup>lt;sup>2</sup> Additional license required — see page 27.















MSRP from €765\*



### Unity H5A Modular Cameras

The smallest Avigilon camera is designed for areas with limited space or that require a discreet monitoring solution.

### Specifications: imager Modules





	19				
MODEL NAME	RIGHT ANGLE IMAGER MODULE	RIGHT ANGLE IMAGER MODULE MICRO BULLET IMAGER MODUL			
Part Number	3C-H5MOD-RP4	3C-H5MOD-RP4 3C-H5MOD-MB2 5C-H5M			
Resolution (MP)	3.0 MP	3.0 MP 3.0 MP 5.			
Image Sensor	1/2.7 " Pro	1/2.7 " Progressive Scan			
Max. Dynamic Range (dB)		WDR Off: 82 dB WDR On: 120 dB			
Max. Image Rate	(50 Hz/60 H:	(50 Hz/60 Hz): 25 fps/30 fps			
Operating Temperature	-30 °C to +60 °C	-30 °C to +60 °C (-22 °F to 140 °F)			
Environmental	N/A	N/A IP66 Weather Rating			
Lens	3.7 mm fixed pinhole aperture	3.7 mm fixed pinhole aperture 2.8 mm fixed			
Horizontal Angle of View (HFOV)	92°	92° 110°			
Vertical Angle of View (VFOV)	53°	53° 80°			
Min. Illumination	0	0.1 lux			

### Key features





Unusual Activity Detection



Avigilon Appearance Search Technology



Wide Dynamic Range Support



FIPS-Compliant Cryptography Available<sup>1</sup>





Facial Recognition Technology



Conformant with ONVIF® Profile S, T and G



H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG









<sup>&</sup>lt;sup>1</sup> Additional license required — see page 27.

### Main I Init



Main Unit		6	
MODEL NAME		MAIN UNIT	
Part Number		H5A-MOD-2P	
Max. Image Rate (Based on	High Frame Rate: (50 Hz/60 Hz)	(≤ 6 MP) 25 fps/30 fps (8 MP) 25 fps/24 fps (10 MP) 20 fps/24 fps	
combined resolution of 1 or 2 imager modules)	Full Feature Mode: (50 Hz/60 Hz)	(≤ 5 MP) 25 fps/30 fps (6 MP) 25 fps/24 fps (8 MP) 20 fps/20 fps (10 MP) 12.5 fps/15 fps	
Max. Dynamic Range		120 dB	
Operating Temperature		-10 °C to +60 °C (14 °F to 140 °F)	
Audio Compression Method		G.711 PCM 8 kHz, Opus	
Audio Input/Output		Line level input and output	
External I/O Term	inals	Alarm In, Alarm Out	
Power Consumption		13 W Max	
Power Source		VDC: 12 V +/-10%, 11.5 W min PoE: IEEE 802.3af Class 3 compliant	
Onboard Storage		2 x microSD/microSDHC/microSDXC slots - video speed class card required. Class V10 or better recommended. One of the two SD card slots is available for onboard storage.	

















### H5A PTZ Cameras

MSRP from €3,589

Combines 360° views for wide area coverage and powerful 36x zoom for long range, evidentiary detail to help you monitor vast areas with ease.





### Specifications

MODEL NAME		INDOOR IN-CEILING	INDOOR/OUTDOOR PENDANT		
Part Number		8.0C-H5A-PTZ-DC36 8.0C-H5A-PTZ-DP36			
Resolution			8 MP		
Image Sensor		1/2.5" Ty	1/2.5" Type "Exmor R" CMOS Sensor		
Optical Zoom		Image Stabilization	Image Stabilization Off: 36x, Image Stabilization On: 30x		
Pan		360°, endless, 300°/second			
Tilt -10° to 90°, e-Flip, 300°/second		o 90°, e-Flip, 300°/second			
Max. Dynamic Range		100 dB			
Max. Image Rate		30 fps			
Environmental		IK10	IK10, IP66/67, NEMA 4X		
LENS (REMOTE	E ZOOM AND FOCUS)				
	Horizontal Angle of View	69.7° – 2.2°			
4.4 mm to 88 mm, F/2.0 - F/3.8	Vertical Angle of View	42.8° – 1.3°			
	Minimum Illumination (color / mono)	0.3 lux (F/2.0) in color mode, 0.09 lux (F/2.0) in mono			

### Key features





Wide Dynamic Range Support



FIPS-Compliant Cryptography Available<sup>1</sup>





Conformant with ONVIF® Profile S, T and G



H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG







Audio Compression Method	Opus, G.711
Audio Input/Output	Line level input/output
External I/O Terminals	2 alarm in, 2 alarm out
External Power Source	24 VDC ±10%; 24 VAC rms ±10%, 50 or 60 Hz
PoE Power Source	60 W PoE: IEEE 802.3bt Class 6 PoE++, 60 W Cisco UPoE, Microsemi 60 W or higher midspans 30 W PoE: IEEE 802.3bt, 802.3at Class 4 PoE+
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.















### H5A IR PTZ Camera

MSRP from €3,652

See up to 300 meters in complete darkness with this high-performing camera. Never miss a moment at large outdoor sites with its 360-degree views and ability to look up 20 degrees above the horizon.



#### Specifications

MODEL NAME	2 MP H5A IR PTZ	4 MP H5A IR PTZ	8 MP H5A IR PTZ
Part Number	2.0C-H5A-IRPTZ-DP40-WP	4.0C-H5A-IRPTZ-DP36-WP	8.0C-H5A-IRPTZ-DP36-WP
Resolution	2 MP	4 MP	8 MP
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.5" Type "Exmo	or R" CMOS Sensor
Max. Dynamic Range	120 dB	100 dB	
Max. Image Rate	60 fps	30 fps	
Environmental		NEMA TS2, Type 4X, IK10, IP66, 67 and 68	
Operating Temperature		-40 °C to + 60 °C (-40 °F to 140 °F)	

LENS		
Lens	4.25 to 170 mm, F/1.6 - F/4.95, autofocus	4.4 to 88 mm, F/2.0 - F/3.8
Horizional Angle of View	63.7 ° – 1.9 °	69.7 ° – 2.2 °
Zoom	40x (with image stabilization off), 30x (with image stabilization on)	36x (with image stabilization off), 30x (with image stabilization on)
Minimum Illumination	0.3 lux (F/2.0) in color mode; 0.02 lux (F/2.0) in mono	0.3 lux (F/2.0) in color mode; 0.09 lux (F/2.0) in mono
IR Illumination Range	300 m	150 m

### Key features Automated IR Illumination 20° Above the Horizon Look Up Video Analytics with Auto-Tracking FIPS-Compliant Cryptography Available Conformant with ONVIF® Profile S, T and G H.264 & H.265 HDSM SmartCodec Technology, Wide Dynamic Range Support

Audio Input/Output	Line level input and output
External I/O Terminals	2 Alarm In, 2 Relay Out
External Power Source	24 VDC ±10%; 24 VAC rms ±10%, 50 or 60 Hz
PoE Power Source <sup>2</sup>	IEEE 802.3bt compliant Class 8 (90W) PoE: Phihong POE90U-1BT6-A-RC (Avigilon part number POE-INJ-BT-90W-NA)
Onboard Storage	MicroSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

<sup>&</sup>lt;sup>1</sup>Additional license required — see page 27.

<sup>&</sup>lt;sup>2</sup> High power PoE is only guaranteed with the IEEE 802.3bt compliant Phihong POE90U-1BT. Contact Avigilon sales or Avigilon technical support for more information.

















### H5A Thermal Cameras

MSRP from €3,799

Obtain long-range perimeter protection with powerful heat-sensing technology that can see through complete darkness, smoke, mist and foliage.

#### Specifications



Model Name	QVGA	VGA	
Part Number	320F-H5A-THC-B050 320F-H5A-THC-B024 320F-H5A-THC-B016 320F-H5A-THC-B012	640F-H5A-THC-B024 640F-H5A-THC-B018 640F-H5A-THC-B012 640F-H5A-THR-B050 640F-H5A-THR-B032	
Resolution	320 x 256 [can be scaled up to 640 x 512]	640 x 512 [can be scaled down to 320 x 256]	
Image Sensor	Uncooled VOx	Microbolometer	
Dynamic Range		-40°C to 225°C (-40°F to 437°F) [may vary based on operating temperature]	
Max. Image Rate	30 fps		
Environmental	IK10, IP66/67, N	IK10, IP66/67, NEMA 250 Type 4X	
PART NUMBER	LENS	ANGLE OF VIEW (H x V)	
640F-H5A-THC-B024	18.0 mm, F1.0	24.3° x 19.5°	
640F-H5A-THC-B018	24.3 mm, F1.0	18.0° x 14.4°	
640F-H5A-THC-B012	36.0 mm, F1.0	12.2° x 9.8°	
320F-H5A-THC-B050	4.3 mm, F1.0	50.0° x 40.0°	
320F-H5A-THC-B024	9.1 mm, F1.0	24.1° x 19.2°	
320F-H5A-THC-B016	13.8 mm, F1.0	16.0° x 12.8°	
320F-H5A-THC-B012	18.0 mm, F1.0	12.2° x 9.7°	

### Key features Conformant with ONVIF® Profile S, T, G and M H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG Radiometric capabilities Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance FIPS-Compliant Cryptography Available<sup>1</sup>, Integrated TPM and Secure Boot







Audio Compression Method	Opus, G.711 PCM 8 kHz	
Audio Input/Output	Line level input and output	
External I/O Terminals	Alarm In, Alarm Out	
External Power Source	VDC: 12V +/- 10%, 9W min. VAC: 24V +/- 10%, 15VA min.	
PoE Power Source	IEEE802.3af Class 3 compliant	
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended	

<sup>&</sup>lt;sup>1</sup> Additional license required.















### H5M Cameras

MSRP from €411


The Small and mighty H5M camera can handle tough environmental conditions while offering advanced AI technology for faster response times and simple installation.

### Specifications



Model Name	H5M		
Part Number	R.OC-H5M-DO1-IR		
Resolution (MP) (1)	2 MP	<b>⑤</b> MP	
Image Sensor (progressive scan CMOS)	1/2.8"		
Max. Dynamic Range (dual exposure)	110 dB		
Max. Image Rate	30 fps	24 fps	
Max. IR Illumination Distance (at 0 lux)	15 m (50 ft)		
Environmental	-30 °C to +55 °C (-22 °F to 131 °F)		

LENS			
2.8mm, F1.2, IR Corrected	Angle of View	(16:9) 112° (5:4) 72° (4:3) 82°	(5:4) 103° (4:3) 104°
	Minimum Illumination (color / mono)	0.04 lux / 0.02 lux	0.02 lux / 0.01 lux

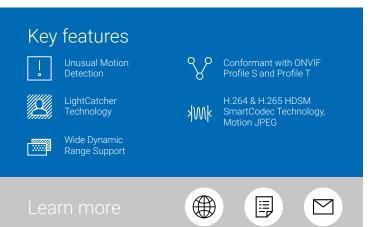

### Audio, power & storage

None
IEEE802.3af Class 0 compliant
None

Part number varies based on camera resolution (3).















### H4 Video Intercom

### MSRP from €1,181

Integrates a fisheye camera with a high-performance intercom, featuring echo-canceling and noise reduction technologies, for clear two-way communication.



### Specifications

Model Name	H4 Video Intercom
Part Number	3.0C-H4VI-R01-IR
Resolution	3 MP
Image Sensor (progressive scan CMOS)	1/2.8"
Max. Dynamic Range	120 dB
Max. IR Illumination Distance (at 0 lux)	5 m (15 ft)
Environmental	IP66 weather rating, IK10 impact rating <sup>1</sup>

LENS		
Fisheye, 1.83 mm, F2.4, IR Corrected	Angle of View	170°
	Minimum Illumination	0 lux

### Key features



Maximum Image Rate of 30 fps



Avigilon Appearance Search Technology



SIP Support



LightCatcher





Wide Dynamic Range Support

H.264 HDSM SmartCodec Technology, Motion JPEG

Conformant with ONVIF Profiles G and S



Audio Compression Method	Opus, G.711
Audio Input/Output	Built-in microphone with hardware disable / built-in speaker
External I/O Terminals	1 alarm in, 2 alarm out, 1 tamper out
External Power Source	VDC: 12V
PoE Power Source	IEEE802.3af Class 3 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot

<sup>&</sup>lt;sup>1</sup> IK08 Impact Rating on bubble.

















### **HALO Smart Sensor**


#### MSRP from €1,301

Deter vaping in private areas such as bathrooms at schools, hospitals or hotel guest rooms with high accuracy. Detect changes in air quality, increased CO2 levels or gunshot sounds and be alerted instantly with the HALO IoT Smart Sensor 3C and its integration with Avigilon Unity Video. Extend the intelligence of the HALO devices with HALO Cloud, a standalone analytics platform that provides deeper insights and behavior metrics derived from the HALO.

### **Specifications**



Model Name	HALO SMART SENSOR	
Part Number	HALO-3C HALO-CLOUD-(1/3/5/10)YR HALO-3CPC	
Dimensions	119mm x 62mm; 4.7" x 2.44"	
Weight	0.365 kgs; 0.8 lbs	
Operating Temperature	Min: 0C (32F), Max: 50C (122F)	
Power	PoE (IEEE 802.3af Class 3 Compliance) 11W	
Relays / Outputs	1, Normally Closed, 48VDC at 1 amp	
Alarm Triggers	Air Quality Index (AQI), Health Index, Vape, Vape THC, Aggression, Gunshot, Spoken Keyword, Tamper, Particulates, Carbon Dioxide Calibrated, Total Volatile Organic Compounds, Carbon Monoxide, Temperature/Humidity, Light Level, Sound Levels, Building Health, Motion Detection, Panic Button  Air Quality Index (AQI), Health Index, Vape, Vape THC, Aggression, Gunshot Spoken Keyword, Tamper, Particulates Carbon Dioxide Calibrated, Total Volatile Organic Compounds, Carbon Monoxid Temperature/Humidity, Light Level, Sound Levels, Building Health, Motion Detection, Panic Button, Occupancy Counting Alert	
USB Port	USB 2.0	
Ethernet Port	Ethernet (RJ45) for Tablet	

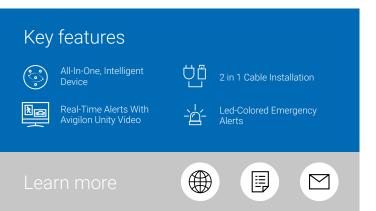















## FIPS Cryptography Support

Enables Avigilon cameras to be deployed at sites requiring FIPS-compliant cryptography. Configure FIPS compliant (FIPS 140-2 Level 1) cryptography mode for supported Avigilon cameras to encrypt data-in-flight to Avigilon FIPS Series Network Video Recorders (NVR).

### Ontional FIPS license availability

Optional FIPS license availability	140-2	W)
FIPS LEVEL	FIPS LEVEL 1 ENCRYPTION	INTEGRATED TPM
Part Number	CAM-FIPS	An integrated TPM holds the camera's identity securely in a tamper-proof
DESCRIPTION	Camera license to enable FIPS Level 1 cryptographic mode on H5A or H6	identity securely in a tamper-proof electronic enclosure, preventing even the most determined attacker from
	camera  MSRP from €10¹	impersonating the device
H6A/H6 camera		<b>✓</b>
H6A PT camera	and the second s	<b>✓</b>
dviolicon H6 Mini Di Camera		
H5 Pro Can	neras	
H5A Fish Camera		
H5A Corr Camera		
H5A Dual R Camera		
H5A Mod Camera		
H5A-PT Camera		
H5A IR P Camera		<b>✓</b>
H5A Multis Camera		<b>✓</b>
H6SL Cam	neras 🗸	<b>✓</b>
H5A Ther Camera		✓
L6A Entery LPR cam	prise 🗸	<b>✓</b>















#### H6A/H6X Dome Cameras

Description	Part Number
Pendant NPT adapter	H6A-MT-NPTA1
Pendant wall arm, 1.5" NPT female, 20 cm (7.8") long	WLMT-1021
In-ceiling adapter	CLADP-1001
Metal ceiling panel for suspended ceiling installations	CLPNL-1011
Weather shield for dome cameras	DMSLD-1001
Replacement clear dome bubble	DMBBL-1001
Replacement IR dome bubble	DMBBL-1011
Optional smoked dome bubble, not compatible with the IR cameras	DMSBL-1001
USB adapter cable, for use with USB-AC56 Wifi install kit	CBLKIT-1011
USB Wifi adapter install kit (North America)	USB-AC56-NA-MSI
USB Wifi adapter install kit (Europe)	USB-AC56-EU-MSI
Camera sealing grommet, pack of 10	GROM-1001
Pipe sealing grommet, pack of 10	GROM-1011
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Avigilon Camera Gunshot Audio Analytics Channel, one per camera (H6A only)	CAM-AA-GUNSHOT
Avigilon Camera Gunshot Audio Analytics Channel, 180 day demo license. Please contact Avigilon Technical Support. (H6A only)	CAM-AA-GUNSHOT- 180D

#### H6A/H6X Bullet Cameras

Description	Part Number
Replacement BO1 bullet sunshield	H6A-BO-SHLD1
Replacement BO2 bullet sunshield	H6A-B0-SHLD2
USB adapter cable, for use with USB-AC56 Wifi install kit	CBLKIT-1011
USB Wifi adapter install kit (North America)	USB-AC56-NA-MSI-B
USB Wifi adapter install kit (Europe)	USB-AC56-EU-MSI-B
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Avigilon Camera Gunshot Audio Analytics Channel, one per camera (H6A only)	CAM-AA-GUNSHOT
Avigilon Camera Gunshot Audio Analytics Channel, 180 day demo license. Please contact Avigilon Technical Support. (H6A only)	CAM-AA-GUNSHOT- 180D
Camera license to enable FIPS cryptographic module	CAM-FIPS

#### **H6X Box Cameras**

Outdoor HD Enclosure with Heater         ES-HD-HWS           Outdoor HD Enclosure with Cooling         ES-HD-CWS           Outdoor HD Small Enclosure with Heater         ES-HD-HWS-SM           USB Wi-Fi adapter         USB-AC56-NA-MSI-B / USB-AC56-EU-MSI-B           Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS         AG3Z2812TCS-MPWIR-MSI           Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris         AG3Z2812KCS-MPWIR-MSI           Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris         M13VG2713IR-MSI           Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris         SL183A-MSI           Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris         SL940P-MSI           Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris         M13VG850IR-MSI           Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris         FG50020P.IR-MSI           Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS-MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI           Ricom HV03610P.IR (3.6-10mm)         HV03610P.IR-MSI	Туре	Part Number
Outdoor HD Small Enclosure with Heater         ES-HD-HWS-SM           USB-AC56-NA-MSI-B / USB-AC56-EU- MSI-B         USB-AC56-EU- MSI-B           Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS         AG3Z2812TCS- MPWIR-MSI           Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris         AG3Z2812KCS- MPWIR-MSI           Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris         M13VG2713IR-MSI           Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris         SL183A-MSI           Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris         SL940P-MSI           Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris         M13VG850IR-MSI           Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris         FG50020P.IR-MSI           Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS- MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS- MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS- MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Outdoor HD Enclosure with Heater	ES-HD-HWS
USB-AC56-NA-MSI-B / USB-AC56-EU- MSI-B  Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS  AG3Z2812TCS- MPWIR-MSI  Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris  AG3Z2812KCS- MPWIR-MSI  Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris  Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris  Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris  Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris  Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris  Computar 9-50mm f1.5, 1/1.8", 4K, iCS  Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	Outdoor HD Enclosure with Cooling	ES-HD-CWS
USB Wi-Fi adapter  / USB-AC56-EU-MSI-B  Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS  AG3Z2812TCS-MPWIR-MSI  Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris  AG3Z2812KCS-MPWIR-MSI  Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris  Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris  Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris  SL940P-MSI  Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris  Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris  Computar 9-50mm f1.5, 1/1.8", 4K, iCS  Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  TeG3Z3915TCS-MPWIR-MSI  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  MBUIR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	Outdoor HD Small Enclosure with Heater	ES-HD-HWS-SM
Computar 2.8-8.5mm f1.2, 1/2.7', 6MP, ICS  MPWIR-MSI  Computar 2.8-8.5mm f1.2, 1/2.7'', 5MP, P-Iris  Tamron 2.7-13mm f1.4, 1/2.7'', 3MP, DC Iris  Theia 1.8-3mm f1.8,1/2.7'', 4K, DC Iris  Theia 9-40mm f1.5, 1/2.3'', 4K, P-Iris  Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris  Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris  Computar 9-50mm f1.5, 1/1.8'', 4K, ICS  Theia 12-50mm f1.8, 1/1.7'', 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8'', 4K, ICS  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  MPWIR-MSI  M13VG850IR-MSI  EG620915TCS-MPWIR-MSI  EG3Z3915KCS-MPWIR-MSI  Computar 3.9-10mm f1.5, 1/1.8'', 4K, ICS  EG3Z3915TCS-MPWIR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	USB Wi-Fi adapter	/ USB-AC56-EU-
Computar 2.8-8.5mm T1.2, 1/2.7', 5MP, P-Iris         MPWIR-MSI           Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris         M13VG2713IR-MSI           Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris         SL183A-MSI           Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris         SL940P-MSI           Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris         M13VG850IR-MSI           Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris         FG50020P.IR-MSI           Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS-MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS	
Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris  Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris  SL940P-MSI  Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris  M13VG850IR-MSI  Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris  FG50020P.IR-MSI  Computar 9-50mm f1.5, 1/1.8", 4K, iCS  Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  EG3Z3915TCS-MPWIR-MSI  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  M117VG3817IR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris	
Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris  SL940P-MSI  Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris  M13VG850IR-MSI  Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris  FG50020P.IR-MSI  Computar 9-50mm f1.5, 1/1.8", 4K, iCS  Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  EG3Z3915TCS-MPWIR-MSI  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  EG3Z3915TCS-MPWIR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris	M13VG2713IR-MSI
Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris         M13VG850IR-MSI           Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris         FG50020P.IR-MSI           Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS-MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Theia 1.8-3mm f1.8,1/2.7", 4K, DC Iris	SL183A-MSI
Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris         FG50020P.IR-MSI           Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS-MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris	SL940P-MSI
Computar 9-50mm f1.5, 1/1.8", 4K, iCS         EG6Z0915TCS-MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris	M13VG850IR-MSI
Computar 9-50mm f1.5, 1/1.8 , 4K, ICS         MPWIR-MSI           Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris         SL1250P-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, ICS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris	FG50020P.IR-MSI
Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris         EG3Z3915KCS-MPWIR-MSI           Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS         EG3Z3915TCS-MPWIR-MSI           Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris         M117VG3817IR-MSI	Computar 9-50mm f1.5, 1/1.8", 4K, iCS	
Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris  MPWIR-MSI  Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS  EG3Z3915TCS- MPWIR-MSI  Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris  M117VG3817IR-MSI	Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris	SL1250P-MSI
Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris M117VG3817IR-MSI	Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris	
1 1 1 1	Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS	
Ricom HV03610P.IR (3.6-10mm) HV03610P.IR-MSI	Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris	M117VG3817IR-MSI
	Ricom HV03610P.IR (3.6-10mm)	HV03610P.IR-MSI

#### **H6A PTZ Cameras**

Description	Part Number
Mount, Pendant Arm, 30 cm Long, 1.5 NPT	WLMT-1031
Pendant wall arm, 1.5" NPT female, 20 cm (7.8") long	WLMT-1021
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Camera license required to enable FIPS 140-2 cryptographic modules	CAM-FIPS
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F). *NA/EU/UK/AU options available.	PD-9001GR/AT/AC- *-MSI
Gigabit 802.3bt 60 W PoE Injector	POE60U-1BTE
PoE injector 802.3bt 90W Single Port	POE90U-1BT
Metal Ceiling Panel for In-Ceiling Installations, Grey	PTZ-CPNL-G
Replacement smoked dome, 25% tint	PTZH6A-SMK25
Replacement smoked dome, 50% tint	PTZH6A-SMK50
Replacement clear dome	PTZH6A-CLRBBL















### Unity H6SL Cameras

Description	Part Number
Wall Mount Arm for 1.5" NPT Pendant	WLMT-1021
Pole Mount Adapter for WLMT-1021	PLMT-1001
Corner Mount for WLMT-1021	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI
In-ceiling mounting adapter for H6SL Dome	SLSPCIL-1001
Pendant NPT adapter for H6SL Dome	H6SL-MT-NPTA1
Metal ceiling panel for suspended ceiling installations	DCLPNL-1001
Weather shield for H6SL Dome	H6SL-DO-SHLD1
Microphone accessory for Indoor H6SL Dome	ACMICR-1001
Clear lower dome for H6SL Outdoor Dome	H6SL-DD-CLER1
Smoked lower dome for H6SL Outdoor Dome	H6SL-DD-SMOK1
Clear lower dome for H6SL Indoor Dome	H6SL-DI-CLER1
Smoked lower dome for H6SL Indoor Dome	H6SL-DI-SMOK1
Adapter 3/4 inch conduit for H6SL Dome, 5-pack	CNCVR-1001

#### H6 Mini Dome Cameras

Description	Part Number
Pack of 5 black surface mount bezels	H6M-BZL1-BL
Pack of 5 grey surface mount bezels	H6M-BZL1-GRY
Grey in-ceiling mount adapter	H6M-MT-DCIL1
Black in-ceiling mount adapter	H6M-MT-DCIL1-BL
Grey pendant mount adapter	H6M-MT-NPTA1
Black pendant mount adapter	H6M-MT-NPTA1-BL

#### H5 Pro Cameras

Туре	Part Number
IP66-rated large housing w/ heater and wall arm	ES-HD-HWS-LG
Large housing w/ cooling fan and wall arm	ES-HD-CWS-LG
IP66-rated extra large housing w/ heater. Wall arm sold separately.	ES-HD-HS-XL

### H5 Pro Camera Lens Options

Description	Part Number
Sigma 28mm f/1.4	LEF2814SI
Sigma 30mm f/1.4	LEFS3014SI
Tamron 35mm f/1.4	LEF3514TA
Canon 40mm f/2.8	LEF4028CA
Sigma 50mm f/1.4	LEF5014SI
Canon 16-35mm f/2.8	LEF163528CA2
Sigma 18-35mm f/1.8	LEFS183518SI
Tamron 24-70mm f/2.8 VC	LEF247028TA2
Tamron 70-200mm f/2.8 VC	LEF7020028TA
Tamron 150-600mm f/5-6.3 VC	LEF1506005TA

### Unity H5A Multisensor Cameras

,	
Description	Part Number
Outdoor surface mount adapter, must order either a H5AMH-D0-COVR1 or H5AMH-D0-COVR1-SMOKE	H5AMH-AD-DOME1
Outdoor pendant mount adapter, must order one of WLMT-1001 or NPTA-1001 and one of H5AMH-D0-COVR1 or H5AMH-D0-COVR1-SMOKE	H5AMH-AD-PEND1
In-ceiling adapter, must order either a H5AMH-DC-COVR1 or H5AMH-DC-COVR1-SMOKE	H5AMH-AD-CEIL1
Dome bubble and cover, for outdoor surface mount or pendant mount, clear	H5AMH-D0-C0VR1
Dome bubble and cover, for outdoor surface mount or pendant mount, smoked. Not recommended for low light applications	H5AMH-DO-COVR1- SMOKE
Dome bubble and cover, for in-ceiling mount, clear	H5AMH-DC-COVR1
Dome bubble and cover, for in-ceiling mount, smoked. Not recommended for low light applications	H5AMH-DC-COVR1- SMOKE
Pendant wall arm adapter, for use with H5AMH-AD- PEND1	WLMT-1001
Pendant NPT adapter for use with H5AMH-AD-PEND1	NPTA-1001
Aluminum pole mounting bracket, compatible with WLMT-1001	PLMT-1001
Aluminum corner mounting bracket, compatible with WLMT-1001	CRNMT-1001
Metal ceiling panel	CPNL-1001
Optional IR illuminator ring, for use with H5AMH-D0- COVR1	H4AMH-AD-IRIL1
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F)	PD-9001 GR/AT/ AC-*-MSI
Gigabit 802.3bt 60 W PoE Injector, single port.	POE60U-1BTE
USB Wi-Fi adapter	USB-AC56-NA-MSI / USB-AC56-EU-MSI
Cable kit replacement for Multi Head cameras	CBLKT-1001
Camera license to enable FIPS cryptographic mode on the H5A Multisensor or any H5A camera	CAM-FIPS















### H5A Fisheye Cameras

Туре	Part Number
NPT adapter for the H5A Fisheye surface mount camera	H5A-FE-MT-NPTA1
Pendant wall mount, compatible with H5A-FE-MT-NPTA1	WLMT-1021
Aluminum corner mounting bracket, compatible with WLMT-1021	H4-MT-CRNR1
Package of 3 dome replacement parts for H5A Fisheye surface mount camera	H5A-FE-DD-CLER1
Metal ceiling panel to reinforce the existing ceiling tile in suspended ceiling installations for H5A Fisheye in-ceiling mount camera	H5A-FE-DC-CPNL1

#### H5A Corner Cameras

Description	Part Number
USB Wi-Fi adapter	H4-AC-WIFI2-NA / H4-AC-WIFI2-EU
3.5 mm jack with 1.8 m fly wire	CM-AC-AVI01

#### H5A Dual Head Cameras

Туре	Part Number
Replacement Dome Cover	H5DH-DO-CLER1
Optional Junction Box Mounting Adapter	H5DH-DO-JBOX1
Optional Pendant NPT Mounting Adapter	H5DH-MT-NPTA1
Pendant Wall Mount Arm	WLMT-1021
Corner Mounting Bracket	H4-MT-CRNR1
Pole Mounting Bracket	H4-MT-POLE1
PoE injector	POE-INJ2-STD
HOD WEET I	H4-AC-WIFI2-NA
USB WiFi adapter	H4-AC-WIFI2-EU

#### H5A Modular Cameras

Туре	Part Number
2 m (6 ft) HD BNC Cable for H5A Modular Camera Imager	CBL2M-1001
5 m (16 ft) HD BNC Cable for H5A Modular Camera Imager	CBL5M-1001
Din rail mount for H5A Modular Camera Main Unit	BRKTMD-1001
Replacement L Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1011
Replacement Flat Bracket for H5A Modular Right Angle Imager	BRKTMD-1021
Replacement Trim Ring Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1031

#### H5A PTZ Cameras

Туре	Part Number
NPT Pendant Adapter	IRPTZ-MNT-NPTA1
Wall Arm Mount	IRPTZ-MNT-WALL1
Pole Mounting Bracket, compatible with IRPTZ-MNT-WALL1	H4-MT-POLE1
Corner Mounting Bracket, compatible with IRPTZ-MNT-WALL1	CRNMT-1001
Corner Mounting Bracket	H4-MT-CRNR1
Metal Ceiling Panel for In-Ceiling Installation	PTZMH-DC-CPNL1
Clear Bubble Assembly - Replacement	PTZH5A-CLER1
Smoked Bubble Assembly - Replacement	PTZH5A-SMOK1
Gigabit 802.3bt 60W PoE Injector, single port.	POE-INJ-BT-60W-NA
30W PoE+ Injector. Injector operational temperature range is -20°C (-4°F) to 40°C (104°F). NA/EU/UK/AU options available.	POE-INJ2-PLUS-NA
H4 In-Ceiling PTZ audio retrofit kit	PTZ-ACCS-IC- RETRO
Cable gland nut kit, pack of 10	H5PTZ-ACCS-CABL1
Camera license to enable FIPS Level 1 cryptographic mode	CAM-FIPS

#### H5A IR PTZ Cameras

Туре	PART NUMBER
NPT Pendant Adapter	IRPTZ-MNT-NPTA1
Wall Arm Mount	IRPTZ-MNT-WALL1
Pole Mounting Bracket	H4-MT-POLE1
Corner Mounting Bracket	H4-MT-CRNR1
Gigabit 802.3bt 60 W PoE Injector, single port	POE-INJ-BT-60W-NA
Gigabit 802.3bt 90 W PoE Injector, single port	POE-INJ-BT-90W-NA
Cable gland nut kit, pack of 10	H5PTZ-ACC-CABL1

#### H5A Thermal Cameras

Description	Part Number
Pole Mount for H5A Thermal Camera, compatible with WLMT-1001	PLMT-1001
Corner Mount for H5A Thermal Camera, compatible with WLMT-1001	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI

#### H5M Cameras

Туре	Part Number
In-ceiling mount	H5M-MT-DCIL1
Package of 4 camera shroud replacement parts	H5M-DO-BZL1

#### H4 Video Intercom

Туре	Part Number
Surface mount adapter	H4VI-MT-SURF1
Safety relay	H4VI-AC-RELY1
PoE injector	POE-INJ2-STD

#### H4 LPC Cameras

Туре	Part Number
Pedestal and ceiling mount	ES-HD-MNT-PAR
Large pole mount	ES-HD-MNT-POLE-LG
Medium pole mount	ES-HD-MNT-POLE-MD
Small pole mount	ES-HD-MNT-POLE-SM
Wall reinforcing plate	ES-HD-MNT-PLATE
Corner mount adapter	ES-HD-MNT-CORNER

#### L6A Cameras

ТУРЕ	PART NUMBER
Pole mount adaptor	PLMT-1001
L6A sunshade replacement	VS-L6A-SHADE
Corner mounting bracket	CRNMT-1001
Camera license to enable FIPS Level 1 cryptographic mode	CAM-FIPS





# Alta Cameras

The Motorola Solutions Avigilon Alta cloud-native video security system is open, flexible and future-proof. Combine smart cameras with the intuitive Al-powered Alta Video cloud platform for enhanced security and awareness anywhere, anytime. With the widest range of cloud camera options on the market, choose from audio capabilities, sensors, and vandal- and weather-resistant models to create your deployment.

















### Ava Flex Camera

#### MSRP from €275

The Al-powered, cloud-native Avigilon Ava Flex wireless camera provides smart, enterprise physical security features in an affordable, easy-to-install package to provide security to small business, retail stores, and other distributed businesses.

# Specifications

Part Number	AVIGILON AVA FLEX CAMERA  FLEX-2MP-7  2 MP
	2 MP
- 1 (1.5)	
Resolution (MP)	4.00 70
Image Sensor	1/2.7"
IR Night Vision Colo	or night vision, Adaptive white light
Minimum Illumination in Color Mode	<0.1lux
Max. Resolution and Frame Rate	1920x1080, 30fps
Dynamic Range	Multi-exposure line-based HDR
Environmental Sensors	Temperature and humidity
Sensor Accuracy	Temperature: ±2.5°C (±4.5°F) Humidity: ±5%
Security	e, Factory-installed certificates, No default passwords, cess authentication, HTTPS/TLS encryption
Physical Characteristics	ll joint mount: 80 x 80 x 96 mm, 202 g camera: 80 x 80 x 38 mm, 142 g
LENS (REMOTE ZOOM AND FOCUS)	

#### 3.3mm, Horizontal Field of View 110° f/1.1, Fixed Vertical Angle of View 58° focus

### Key features Versatile, lightweight and fit for discreet indoor Fixed lens camera with color night vision Insights from integrated and processing

Audio	Microphone
Power Source	PoE 802.3af or USB-C 1.5A
Power Consumption	Typical: 3.5W Max: 6W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3u 10/100 Ethernet USB-C for preview and setup
Onboard Storage	MicroSD SDXC High Speed
	<u> </u>





















### Ava Compact Dome Camera

MSRP from €417

The Al-powered, cloud-native Avigilon Ava Compact Dome camera is discreet, robust, and easy to install and manage, providing crystal clear visibility indoors to help ensure safety and security.



### Specifications

MODEL NAME	<b>E</b>	AVIGILON AVA COMPACT DOME CAMERA		
Part Number		COMPACTDOME-W-5MP-30 COMPACTDOME-W-5MP-60 COMPACTDOME-W-5MP-120	COMPACTDOME-W	
On-board Stor	rage	30, 60, or 120 days	None. Cloud Connector required.	
Resolution (MF	P)	5 MP		
Image Sensor	Size Format	1/2.7"		
IR Night Vision	1	Automatic Night Mode, IR-cut filter, 10m IR Range, 850 nm IR LED		
Minimum Illum	nination in Color Mode	0.10lux		
Max. Resolutio	on and Frame Rate	2688x1944@30fps		
Dynamic Range	e	Multi-exposure line-based HDR		
Environmental		Operating: 0°C to +40°C Storage: -40°C to +60°C		
Security		Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption		
Physical Characteristics  Dimensions: 107x107x64mm Weight: 280g				
LENS (REMOT	E ZOOM AND FOCUS)			
3.2mm,	Horizontal Field of View	102°		
f/1.3, Fixed focus	Vertical Angle of View	71	•	

### Key features Easy installation, configuration, and management Al video analytics for loitering, anomalies and more Audio analytics and acoustic sensor On-board storage<sup>1</sup> 5 MP Image Sensor and processing







### Audio, power & networking

Audio	Microphone
Power Source	PoE 802.3af USB-C, installation only
Power Consumption	Typical: 5W Max: 8W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3ab 10/100/1000 Gigabit Ethernet USB-C for preview and setup

<sup>&</sup>lt;sup>1</sup> Available on most models

















### Ava Dome Camera

MSRP from €1,054

The Al-powered, cloud-native Avigilon Ava Dome camera is versatile, robust, and easy to install and manage, providing crisp, clear images to help you stay on top of what matters.



### Specifications

MODEL NAME			AVIGILON AVA DOME CAMERA		
Part Number		DOME-W-4K-30 DOME-W-4K-60	DOME-W-4K	DOME-W-5MP-30 DOME-W-5MP-60 DOME-W-5MP-120	DOME-W-5MP
On-board Stora	age	30 or 60 days	None. Cloud Connector required.	30, 60 or 120 days	None. Cloud Connector
Resolution (MP	P)		4K 5 MP		MP
Image Sensor			8 MP (4K)		
IR Night Vision		Autor	Automatic Night Mode, IR-cut filter, 30M IR Range, 850 nm IR LED		ı IR LED
Minimum Illum	ination in Color Mode		0.15	ilux	
Max. Resolutio	n and Frame Rate	3840x21	60@30fps	3072x17	728@30fps
Dynamic Range	e		Multi-exposure line-based HDR		
Environmental			IP66 Weather Rating, IK10 Impact Rating		
Security			form Module, Factory-instal andatory access authentica		
			Dimensions: 152x152x96mm		
Physical Chara	al Characteristics Weight: 1.2 kg Body: Aluminum		•		
LENS (REMOT	E ZOOM AND FOCUS)				
3.6-10mm,	Horizontal Field of View		100°-	45°	
f/1.5-f/2.8, P-Iris	Vertical Angle of View		53° - 25°		

#### Key features



Easy installation, configuration, and





4K Image Sensor





Audio analytics and acoustic sensor



On-board storage<sup>1</sup> and processing







### Audio, power & networking

Audio	Microphone Array (4x microphones)
Audio	Audio source localization
Power Source	PoE+ (802.3at Type 2)
	T : 1511
	Typical: 5W
Power Consumption	Max without heater: 13W
	Max with heater: 23W
	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP,
Networking Protocols	RTSP, RTP, RTCP, ICMP, DHCP, ARP
ŭ	Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCF
Connection	802.3ab 10/100/1000 Gigabit Ethernet
	USB-C for preview and setup

<sup>&</sup>lt;sup>1</sup> Available on most models

















### Ava Bullet Cameras

MSRP from €1,282

The Al-powered, cloud-native Avigilon Ava Dome camera is versatile, robust, and easy to install and manage, providing crisp, clear images to help you stay on top of what matters.





### Specifications

MODEL NAME	AVIGILON AVA BULL	AVIGILON AVA BULLET CAMERA (WIDE) AVIGILON AVA BULLET (TELEPHOTO)		
Part Number	BULLET-WI-W-4K-30 BULLET-WI-W-4K-60 BULLET-WI-W-5MP-30 BULLET-WI-W-5MP-60 BULLET-WI-W-5MP-120	BULLET-WI-W BULLET-WI-W-5MP	BULLET-TE-W-4K-30 BULLET-TE-W-4K-60 BULLET-TE-W-5MP-30 BULLET-TE-W-5MP-60 BULLET-TE-W-5MP-120	BULLET-TE-W BULLET-TE-W-5MP
On-board Storage	30, 60, or 120 days	None. Cloud Connector required.	30, 60, or 120 days	None. Cloud Connector required.
Resolution (MP)		5 M	P, 4K	
Image Sensor		1/1	.8"	
IR Night Vision		Automatic Night Mode, If	R-cut filter, 850 nm IR LED	
Minimum Illumination in Color Mode		4K: 3840x2 5 MP: 3072x	160@30fps 1728@30fps	
Dynamic Range	Multi-exposure line-based HDR			
Environmental		IK10 Impact Resistance	IP66 Ingress Protection	
Security			lled certificates, No defaul ation, HTTPS/TLS encrypti	•
Physical Characteristics		Dimensions: Weight:	284x86x108 1.33 kg	

LENS (Remote 2	mote Zoom and Focus) Wide Telephoto		
	Zoom	2.5:	x
4.3-10.8mm, f/1.38-f/2.8	Horizontal Field of View	100° - 40°	39° - 16°
J/ 1.30-J/2.0	Vertical Angle of View	53° - 23°	23° - 9°

### Key features



telephoto lenses for flexible coverage options



innovative sliding body design and easy onboarding



Dynamic resolution up to 4K



Al video analytics for loitering, anomalies and



Audio analytics and acoustic sensor



and processing







### Audio, power & networking

Audio	Microphone Array (4x microphones) Audio source localization
Power Source	PoE+ (802.3at Type 2), normal operation PoE (802.3 af), without heat and IR USB-C, installation only
Power Consumption	Typical: 5 W Max without heater, with IR: 13 W Max with heater: 23 W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3u 10/100 Ethernet USB-C for preview and setup
Connection	USB-C for preview and setup

<sup>&</sup>lt;sup>1</sup> Available on most models
















### Ava 360 Camera

#### MSRP from €997

The Al-powered, cloud-native Avigilon Ava 360 camera is ideal for locations that require visibility in all areas. Whether indoors or outdoors, the Ava 360 provides high resolution coverage of a wide area, even in challenging environments and with low light.



360-W-30	I AVA 360 CAMERA	
360-W-60	360-W	
30 or 60 days	None. Cloud Connector required.	
12 MP, 1/2.3"		
	9 MP	
> 180°		
Automatic Night Mode, IR-cut filter, 20m IR Range, 850 nm IR LED		
0.4lux		
3008x3008@30fps		
Multi-exposure line-based HDR		
IP66 Ingress Protection, IK10 Impact Resistance		
Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption		
	ns: 152x152x77mm	
Weight: 1.1 kg Body: Aluminum		
	Automatic Night Mode, IR-co 3008 Multi-expc IP66 Ingress Protec Trusted Platform Module, Factory- Mandatory access auth Dimensio	

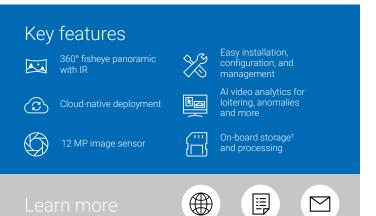

#### Audio, power & networking

Microphone array (4x microphones)
PoE+ (802.3at Type 2) For installation only: USB-C (1.5A mode)
Typical: 5 W Max without heater: 13 W Max with heater: 23 W
IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
802.3ab 10/100/1000 Gigabit Ethernet USB-C for preview and setup

<sup>&</sup>lt;sup>1</sup> Available on most models















### Alta H6SL Cameras

MSRP from €598

Protect people and property effortlessly with this cloud-native, versatile, analytics-enabled camera line that can fit into an extensive range of indoor and outdoor applications.

### Specifications





Model Name		INDOOR DOME OUTDOOR DOME		DR DOME	BUI	LLET	
		NON-IR				WIDE	TELEPHOTO
Part Number		2.0C-H6SL-D1- <b>C</b> 3.0C-H6SL-D1- <b>C</b> 5.0C-H6SL-D1- <b>C</b>	3.0C-H6SL-D1-IR-C	3.0C-H6SL-D01-IR-C	2.0C-H6SL-B01-IR- C 2 3.0C-H6SL-B01-IR- C 3 5.0C-H6SL-B01-IR- C 5	.0C-H6SL-B01-IR-C	5.0C-H6SL-B02-IR-
On-board Storage 🕒		30, 60, 120, or 365¹ days					
Resolution			2 MP, 3 MP, 5 MP 3 MP, 5 MP			3 MP, 5 MP	
Image Sensor			1/2.8" progressive scan CMOS				
Dynamic Range HDR OFF				83	dB		
Dynamic Range HDR ON		2MP = 126 dB, 3 MP/5MP = 130 dB					
Max. Image Rate		30 fps					
Environmental		IK10		IK10, IP66/6	7, Type 4X		
LENS & IR ILLUMINATION		(D	3.4-10.5 MM LENS OME AND WIDE BULI			10.9-29 MM LENS EPHOTO BULLET O	NLY)
	Dome	30 m (100 ft), full tele 20 m (65 ft), full wide 50 m (164 ft), full tele 30 m (100 ft), full wide			N/A		
Max. IR Illumination Distance (high power 850 nm LEDs)	Bullet 2 MP			N/A			
	Bullet 3 MP, 5 MP		40 m (131 ft), full tele 20 m (65 ft), full wide			m (230 ft), full tel m (100 ft), full wid	
Min. Illumination	2 MP	With IR: 0 lux in mono mode Without IR: 0.01 lux in color mode; 0.005 lux in mono mode			N/A		
(at 33 ms shutter speed)	3 MP 5 MP	With IR: 0 lux in mono mode Without IR: 0.04 lux in color mode; 0.02 lux in mono mode					
Horizontal Field of View (H)	2 MP	10	01° - 31° (H), 53° - 17°	(V)		N/A	
& Vertical Field of View (V) 3 MP 5 MP		9	5° - 28° (H), 69° - 21°	(V)	28°	- 10° (H), 21° - 7° (	V)

### Key features Al video analytics for loitering, anomalies High Dynamic Range Rated IK10 for vandal resistance on all models Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance (outdoor models only) 圓

Dome

Bullet

### Audio & power

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	Alarm In, Alarm Out
Microphone	Optional microphone accessory sold separately (Indoor Dome model only)
PoE Power Source	IEEE 802.3af Class 3 compliant, 12VDC Aux (Bullet only)

<sup>1 365</sup> day storage only available on 2 MP models

















MSRP from €1,985

### Alta H5A Multisensor Cameras

The Alta H5A Mulitsensor combines all-around visibility, image quality and ease-of-use to secure any area over the cloud. With 3 or 4 sensors and up to a 360° field of view, you can see around corners, through intersections or across parking lots with a single camera.

### Specifications





MODEL NAME	H5A MULTISENSOR, 3-SENSORS H5A MULTISENSOR, 4-SENSORS			SOR, 4-SENSORS
Part Number	9C-H5A-3MH-30 9C-H5A-3MH-60 9C-H5A-3MH-120 15C-H5A-3MH-30	15C-H5A-3MH-60 15C-H5A-3MH-120 24C-H5A-3MH-30 24C-H5A-3MH-60	12C-H5A-4MH-30 12C-H5A-4MH-60 20C-H5A-4MH-30	20C-H5A-4MH-60 32C-H5A-4MH-30
On-board Storage	30, 60, or 120 days, dep	ending on configuration	30 or 60 days, depen	ding on configuration
Resolution	3 x 3 MP 3 x 5 MP 3 x 8 MP		4 x 3 MP 4 x 5 MP 4 x 8 MP	
Image Sensor	1/2.8" progressive scan CMOS			
Max. Dynamic Range (dB)	HDR On: 120 dB, true HDR, dual exposure HDR Off: 80 dB			
Max. Image Rate (60 Hz / 50 Hz)	3 MP : 30/25 fps 5 MP : 24/25 fps 8 MP : 17/16 fps			
Max. IR Illumination Distance¹ (high power 850 nm LED)	30 m (98 ft) maximum distance at 0 lux when camera is mounted at 4 m (13 ft) off the ground			
Environmental	IP66 and IP67 Weather Rating, NEMA 4X Enclosure Rating, IK10 Impact Rating			

LENS & IR ILLUMINATION	3.0 MP	5.0 MP	4k (8.0 MP)
Focal Length	3.3-5.7mm		
Horizontal FoV based on Aspect Ratio	53°-99° (4:3)		58°-106° (16:9)
Vertical FoV based on aspect ratio	39°-69° (4:3)		32°-55° (16:9)
Aperture Range	F1 - F1.9		
Control	Fixed Iris, Remote Focus and Zoom		

### Key features



Al video analytics for loitering, anomalies









and processing



IK10-rated for vandal



IP66/67, NEMA Type 3X and TS2 ratings protect against impact, water, windblown dust and a degree of corrosion









### Audio, Power & Networking

Audio Comp Method	ression	G.711 PCM 8 kHz, Opus
Audio Input/Output Line level input and output		Line level input and output
External I/O	Terminals	Alarm In, Alarm Out
External Power		24 VDC ± 10 %; 24 VAC rms ± 10 %, 50 or 60 Hz
	In-Ceiling	30 W IEEE 802.3at Type 2 (PoE+)
PoE Power Source Mount and Pendant Mount		With IR: 60 W (PoE++): IEEE 802.3bt Type 3, Cisco® UPoE or legacy high-power PoE Up to 35% IR Power or without IR: 30 W IEEE 802.3at Type 2 (PoE+)
Onboard Storage		microSD/microSDHC/microSDXC slot – class 10/ UHS-1 or better recommended

<sup>&</sup>lt;sup>1</sup> IR intensity is based on the supplied PoE power

<sup>&</sup>lt;sup>2</sup> Audio output is not currently supported

<sup>&</sup>lt;sup>3</sup> Not currently supported















### Alta H5A Modular Cameras

### MSRP from €1,666\*

The Alta H5A Modular camera is our smallest camera, most flexible camera, designed to provide visibility and security in the most challenging spaces.

#### Specifications: İmager Modules





_	10			
MODEL NAME	RIGHT ANGLE IMAGER MODULE	RIGHT ANGLE IMAGER MODULE MICRO BULLET IMAGER MODULI		
Part Number	3C-H5MOD-RP4	3C-H5MOD-RP4 3C-H5MOD-MB2 5C-H5MOD		
Resolution (MP)	3.0 MP	3.0 MP 3.0 MP 5.0 MF		
Image Sensor	1/2.7 " Pro	1/2.7 " Progressive Scan		
Max. Dynamic Range (dB)		WDR Off: 82 dB WDR On: 120 dB		
Max. Image Rate		WDR Off: 25 fps/30 fps WDR On: 20 fps/20 fps		
Operating Temperature	-30 °C to +60 °C	-30 °C to +60 °C (-22 °F to 140 °F)		
Environmental	N/A	N/A IP66 Rating		
Lens	3.7 mm fixed pinhole aperture	3.7 mm fixed pinhole aperture 2.8 mm fixed		
Horizontal Angle of View (HFOV)	92°	92° 110°		
Vertical Angle of View (VFOV)	53°	53° 80°		
Min. Illumination	0	0.1 lux		

### Key features



Al video analytics for loitering, anomalies and





Highly customizable modular design





On-board storage and processing



→ Wk High dynamic range









<sup>&</sup>lt;sup>1</sup> Audio output is not currently supported <sup>2</sup> Not currently supported

### Main Unit



MODEL NAME Part Number	MODULAR BASE UNIT, 1 LENS SUPPORT H5A-MOD-2P-1-30 H5A-MOD-2P-1-120 H5A-MOD-2P-1-365	MODULAR BASE UNIT, 2 LENS SUPPORT H5A-MOD-2P-2-30 H5A-MOD-2P-2-60 H5A-MOD-2P-2-120		
Storage	30, 60, 120 or 365 days, depending on configuration	30 or 60 days, depending on configuration		
Max Image Rate (Based on combined resolution of imagers in 2 lens model)	(≤ 5 MP) 25 fps/30 fps	(6 MP) 25 fps/24 fps		
Max. Dynamic Range	Up to 120 dB			
Operating Temperature	-10 °C to +60 °C (14 °F to 140 °F)			
Audio Compression Method	G.711 PCM 8 kHz, Opus			
Audio Input/Output <sup>1</sup>	Line level input and output			
External I/O Terminals <sup>2</sup>	Alarm In, Alarm Out			
Power Consumption	13 W Max			
Power Source	VDC: 12 V +/-10%, 11.5 W min PoE: IEEE 802.3af Class 3 compliant			















### Alta Camera Accessories

### Avigilon Ava Dome Camera

Туре	PART NUMBER
Avigilon Ava Pendant Mounting Cap	ACC-PEN-CAP-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-W
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Pole Bracket	ACC-POL-BRA-W
Avigilon Ava Corner Bracket	ACC-CRN-BRA-W
Avigilon Ava Conduit Adapter 3/4"	ACC-CON-A34-W

### Avigilon Ava Compact Dome

Туре	PART NUMBER
Avigilon Ava Drop Ceiling Mount	ACC-DRO-CEI
	ACC-POE-15W-US
Avigilon Ava PoE Injector 15W	ACC-POE-15W-UK
	ACC-POE-15W-EU

### Avigilon Ava 360 Camera

Туре	PART NUMBER
Avigilon Ava Pendant Mounting Cap	ACC-PEN-CAP-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-B
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Pole Bracket	ACC-POL-BRA-W
Avigilon Ava Corner Bracket	ACC-CRN-BRA-W
Avigilon Ava Conduit Adapter 3/4"	ACC-CON-A34-W

### Avigilon Ava Quad Camera

Туре	PART NUMBER
Avigilon Ava Recessed Kit	ACQ-REC-KIT
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Wall Mount Bracket	ACQ-WAL-MNT
Avigilon Ava Pole Bracket	ACQ-POL-MNT
Avigilon Ava Corner Bracket	ACQ-CRN-MNT
Avigilon Ava Mounting Adapter	ACQ-MNT-ADA

### Avigilon Ava Compact Dome

Туре	PART NUMBER
Avigilon Ava Drop Ceiling Mount	ACC-DRO-CEI
	ACC-POE-15W-US
Avigilon Ava PoE Injector 15W	ACC-POE-15W-UK
	ACC-POE-15W-EU

### Avigilon Ava Bullet Camera

Туре	PART NUMBER
Avigilon Ava Weather shield	ACC-WEA-SHI-W
Avigilon Ava Conduit back box	ACC-CON-BCK-W
Avigilon Ava Adapter plate	ACC-ADA-PLA-W
Avigilon Ava Pole bracket	ACC-POL-BRA-W
Avigilon Ava Corner bracket	ACC-CRN-BRA-W

#### Alta H6SL Cameras

Description	Part Number
Wall Mount Arm for 1.5" NPT Pendant	WLMT-1021
Pole Mount Adapter for WLMT-1021	PLMT-1001
Corner Mount for WLMT-1021	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI
In-ceiling mounting adapter for H6SL Dome	SLSPCIL-1001
Pendant NPT adapter for H6SL Dome	H6SL-MT-NPTA1
Metal ceiling panel for suspended ceiling installations	DCLPNL-1001
Weather shield for H6SL Dome	H6SL-DO-SHLD1
Microphone accessory for Indoor H6SL Dome	ACMICR-1001
Clear lower dome for H6SL Outdoor Dome	H6SL-DD-CLER1
Smoked lower dome for H6SL Outdoor Dome	H6SL-DD-SMOK1
Clear lower dome for H6SL Indoor Dome	H6SL-DI-CLER1
Smoked lower dome for H6SL Indoor Dome	H6SL-DI-SMOK1
Adapter 3/4 inch conduit for H6SL Dome, 5-pack	CNCVR-1001














### Alta Camera Accessories

#### Alta H5A Multisensor Cameras

Description	Part Number
Outdoor surface mount adapter, must order either a H5AMH-D0-C0VR1 or H5AMH-D0-C0VR1-SMOKE	H5AMH-AD-DOME1
Outdoor pendant mount adapter, must order one of WLMT-1001 or NPTA-1001 and one of H5AMH-DO- COVR1 or H5AMH-DO-COVR1-SMOKE	H5AMH-AD-PEND1
In-ceiling adapter, must order either a H5AMH-DC- COVR1 or H5AMH-DC-COVR1-SMOKE	H5AMH-AD-CEIL1
Dome bubble and cover, for outdoor surface mount or pendant mount, clear	H5AMH-D0-COVR1
Dome bubble and cover, for outdoor surface mount or pendant mount, smoked. Not recommended for low light applications	H5AMH-DO-COVR1- SMOKE
Dome bubble and cover, for in-ceiling mount, clear	H5AMH-DC-COVR1
Dome bubble and cover, for in-ceiling mount, smoked. Not recommended for low light applications	H5AMH-DC-COVR1- SMOKE
Pendant wall arm adapter, for use with H5AMH-AD-PEND1	WLMT-1001
Pendant NPT adapter for use with H5AMH-AD-PEND1	NPTA-1001
Aluminum pole mounting bracket, compatible with WLMT-1001	PLMT-1001
Aluminum corner mounting bracket, compatible with WLMT-1001	CRNMT-1001
Metal ceiling panel	CPNL-1001
Optional IR illuminator ring, for use with H5AMH-D0-C0VR1	H4AMH-AD-IRIL1
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F)	PD-9001 GR/AT/ AC-*-MSI
Gigabit 802.3bt 60 W PoE Injector, single port.	POE60U-1BTE
USB Wi-Fi adapter	USB-AC56-NA-MSI / USB-AC56-EU-MSI
Cable kit replacement for Multi Head cameras	CBLKT-1001
Camera license to enable FIPS cryptographic mode on the H5A Multisensor or any H5A camera	CAM-FIPS

#### H5A Modular Cameras

Туре	Part Number
2 m (6 ft) HD BNC Cable for H5A Modular Camera Imager	CBL2M-1001
5 m (16 ft) HD BNC Cable for H5A Modular Camera Imager	CBL5M-1001
Din rail mount for H5A Modular Camera Main Unit	BRKTMD-1001
Replacement L Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1011
Replacement Flat Bracket for H5A Modular Right Angle Imager	BRKTMD-1021
Replacement Trim Ring Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1031

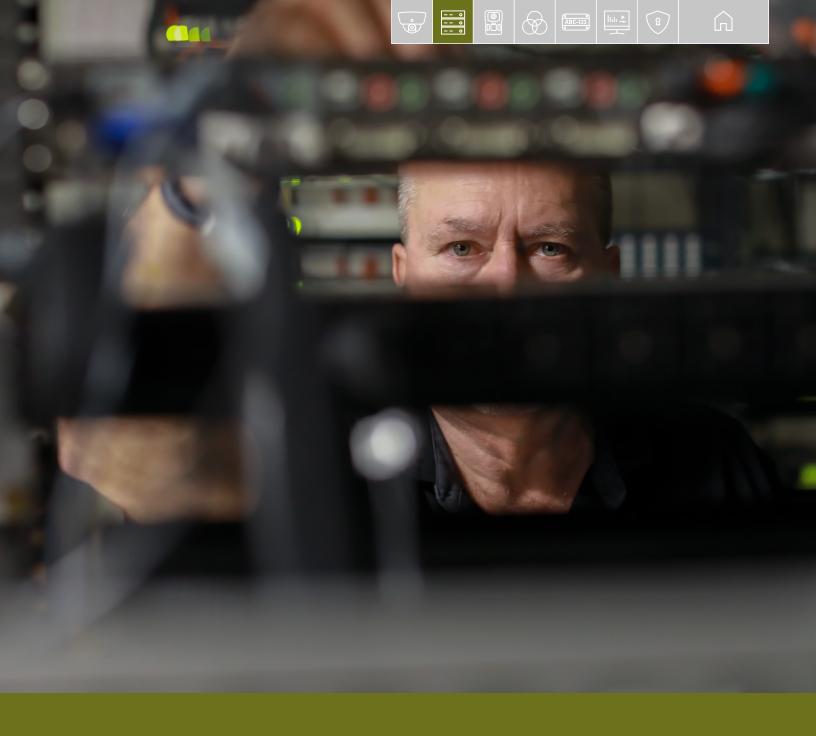



Whether you need a couple of cameras to monitor a storefront or thousands of cameras to secure a large campus, using a complete Avigilon solution helps take the risk out of deployment and maintenance. Avigilon Network Video Recorders (NVRs) and appliances are pre-configured for enhanced system performance and to save you time during deployment.















### AINVR 2

#### MSRP from €6,543

Enhance your video security infrastructure with robust analytics for Avigilon and third-party cameras using the secondgeneration Artificial Intelligence Network Video Recorder (AI NVR 2). Suitable for enterprise sites of any size and retention policy, the AI NVR 2 expands on the capabilities of its predecessors, offering up to 440 TB of storage for up to 400 cameras for recording and 220 cameras for Appearance Search.

Specifications		• -	• •	
MODEL NAME	PREMIUM PLUS Form H	PREMIUM Form D	STANDARD Form D	VALUE Form D
Part Number	AINVR2-PRM-PLUS- FORM-H-CTB	AINVR2-PRM-FORM-D-CTB	AINVR2-STD-FORM-D-CTB	AINVR2-VAL-CTB
Storage capacity ()	200 240 280 360 440 TB	72 96 120 160 200 TB	16 24 32 48 64 TB	6 12 16 24 TB
os		Avigilon Ha	ardened OS	
Out-of-band management	iLO Advanced	iDRAC 9 Express		
Support	5YR, 4HR, Mission critical	5YR, 4HR, Mission critical	5YR Next business day	3YR Next business day
Networking	4x1G & 4x10G SFP+	6x1G & 4x10G SFP+	6x1G	2x1G
Recording rate <sup>1</sup>	300 to 400 ch @ 2000 to 2700 Mbps	200 ch @ 1500 Mbps	130 ch @ 900 Mbps	70 to 90 ch @ 450 to 550 Mbps
Live stream rate <sup>1</sup>	300 to 400 ch @ 2000 to 2700 Mbps	600 ch @ 1500 Mbps	600 ch @ 800 Mbps	70 to 90 ch @ 450 to 550 Mbps
Playback rate <sup>1</sup>	80 to 100 ch @ 600 to 680 Mbps	80 ch @ 600 Mbps	80 ch @ up to 600 Mbps	40 to 45 ch @ 250 to 300 Mbps
Redundancy	RAID60	RA	ID6	RAID5

#### Camera & analytics support

			YTICS ERAS <sup>2</sup>	NON-ANALYTIC CAMERAS <sup>2</sup>				NUMBER OF LPR LANES <sup>3</sup>								
MODEL	ANALYTICS KIT	AS ONLY <sup>4</sup>	FR+ AS <sup>6</sup>	COD ONLY <sup>4</sup>	COD + AS <sup>6</sup>	COD + AS + FR <sup>5</sup>	COD + AS <sup>5</sup> + VFD <sup>6</sup>	COD + AS <sup>5</sup> + VFD <sup>6</sup> + FR	<b>5FPS</b> <16 KM/H	DEFAUL 10 FPS <48 KM/H	.T MODE 20 FPS <100 KM/H		PE 5FPS <16 KM/H	RFORMA 10 FPS <48 KM/H	NCE MO 20 FPS <100 KM/H	
D : DI	-	220	120	35	34	30	15	14	68	42	21	14	56	28	14	9
Premium Plus	1 × AINVR2-PRM- PLUS-FORM-H-ANK	200	120	70	68	60	30	28	85	42	21	14	106	53	26	17
	-	200	70	9	9	8	5	4	34	23	11	7	34	21	10	7
Premium	1 × AINVR2-PRM- PLUS-FORM-H-ANK	200	120	47	45	38	20	18	46	23	11	7	89	48	24	16
	1 × AINVR2-PRM- PLUS-FORM-H-ANK	200	120	57	57	20	35	32	46	23	11	7	119	59	29	19
	-	-	-	-	-	-	-	-	17	8	4	2	-	-	-	-
Value	1 × AINVR2-PRM- PLUS-FORM-H-ANK	90	31	4	4	3	2	1	16	10	5	3	16	14	7	4
	1 × AINVR2-PRM- PLUS-FORM-H-ANK	90	70	9	9	8	5	4	20	10	5	3	34	21	10	7

#### Key features





Easy upgrades and device management



Simple deployment with pre-configured Avigilon Unity Video



Single contact for end-to-end technical support









- <sup>1</sup>Refers to the maximum number of channels at maximum cumulative throughput.
- <sup>2</sup> Based on validation testing by Avigilon. Assumes appliance-wide average per camera rates of classified objects leaving the field of view.
- <sup>3</sup> Assumes a 3MP camera with 1MP license plate scan area and Frames Per Second (FPS) to recognize license plates up to vehicle speeds in Kilometers Per Hour (KM/H). Results may vary according to camera mounting parameters.
- $^{4}$  For cameras at 2MP and 30 frames per second (fps). Requires ACC 7.14.32 / Unity Video 8.3.0.
- <sup>5</sup> Requires H6A, H5A, H4A cameras, or Classified Object Detection (COD) running on non-analytic cameras.
- <sup>6</sup> When enabling Visible Firearm Detection (VFD), disable analytics on the Avigilon camera, enable COD and count the camera as a non-analytic camera.
- $^{7}$  Requires License Plate Recognition (LPR) performance mode to be enabled. Available with ACC version 7.14.6 or later. LPR Performance mode will limit other analytics on your AI NVR 2. See the AI NVR 2 user guide for more information.


















### NVR6

#### MSRP from €15,312

Handle heavy-duty video workloads and longer retention capabilities without sacrificing performance. The sixth-generation Avigilon Network Video Recorder (NVR6) is a comprehensive video security system that delivers where it matters: performance, reliability and security. Choose from 16 TB to 440 TB storage options in a single NVR, supporting up to 400 cameras for recording and 220 cameras for Appearance Search.

#### Specifications VALUE Form D MODEL NAME NVR6-PRM-PLUS-FORM-H-CTB-S22 Part Number NVR6-PRM-FORM-D-CTB-S22 NVR5-VAL-CTB NVR6-STD-FORM-D-CTB 72 96 120 160 200 TB 16 24 32 48 64 TB 6 12 16 24 TB 200 240 280 360 440 TB Storage capacity () Windows 10 v21H2, os Windows Server 2022 Windows Server 2022 Windows 10 v21H2 Windows Server 2022 **Out-of-band management** iLO Advanced iDRAC 9 Enterprise iDRAC 9 Express 5YR, 4HR, 5YR. 4HR. 5YR Next 3YR Next Support Mission critical Mission critical business day business day Networking 4x1G & 4x10G SFP+ 6x1G & 4x10G SFP+ 6x1G 2x1G 35 to 46 ch @ 220 to 400 ch @ 200 ch @ 130 ch @ Recording rate<sup>1</sup> 1500 to 2700 Mbps3 1500 Mbps 900 Mbps 450 to 550 Mbps 220 to 400 ch @ 600 ch @ 600 ch @ 70 to 90 ch @ Live stream rate<sup>1</sup> 1500 to 2700 Mbps<sup>3</sup> 1500 Mbps 800 Mbps 450 to 550 Mbps 50 to 100 ch @ 80 ch @ 80 ch @ 40 to 45 ch @ Playback rate<sup>1</sup> 340 to 680 Mbps<sup>3</sup> 600 Mbps up to 600 Mbps 250 to 300 Mbps Analytic channels supported for Appearance 220<sup>3</sup> 200 90 0 to 46<sup>2</sup> Search + Facial Recognition 60 50 50 0 to 46<sup>2</sup> License Plate Recognition 30 lanes 20 lanes 11 lanes 7 lanes @10FPS (<48 KM/H) Redundancy RAID60 RAID6 RAID5

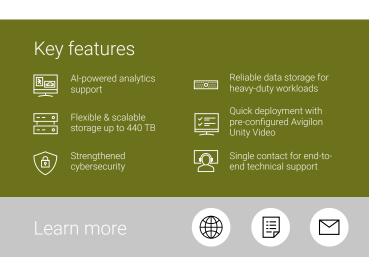

- <sup>1</sup> Refers to the maximum number of channels at maximum cumulative throughput.
- <sup>2</sup> Refer to the Datasheet for the analytics kit required.
- 3 ACC 7.14.32.10 / Unity Video 8.3.0 Required. Pre-installed with Avigilon Control Center 7. The Unity Video 8 installer is available on the machine for upgrade.















### Workstations

#### MSRP from €2,013

Experience superior performance and reliability by accessing video from multiple NVRs with the Remote Monitoring Workstation or combine a network video recorder and a client workstation into one powerful NVR5 Workstation. The workstations are now equipped with upgraded 12th-generation Intel processors that enable more efficient recording, reliability and video playback capabilities.

### Specifications

				-	and the second s			
MODEL NAME		NVR5 WOR	KSTATION	REMOTE MONITORING WORKSTATION				
Part Number		NVR5-WKS-4TB	NVR5-WKS-8TB	RM7-WKS-4MN	RM7-WKS-2MN			
	2 MP @ 30 fps	18 Primary	y Streams	22 Primary Streams + 14 Secondary Streams	18 Primary Streams			
	4 MP @ 30 fps	18 Primary	y Streams	22 Primary Streams + 14 Secondary Streams	18 Primary Streams			
Video Playback Performance	8 MP @ 30 fps	4 Primary Streams Strea		4 Primary Streams + 32 Secondary Streams	4 Primary Streams + 14 Secondary Streams			
	16 MP @ 24 fps	2 Primary Streams Strea		2 Primary Streams + 34 Secondary Streams	2 Primary Streams + 16 Secondary Streams			
	61 MP @ 7 fps	4 Primary Streams + 14 Secondary Streams		6 Primary Streams + 30 Secondary Streams	4 Primary Streams + 14 Secondary Streams			
Supported Monitor		Interfaces Combi mDP, DP, a (DP and HDMI adap	and HDMI	Combination of up to 4: mDP, DP, and HDMI (DP and HDMI adapters are supplied)	Combination of up to 2: mDP, DP, and HDMI (DP and HDMI adapters are supplied)			
Operating System			Micro	osoft Windows 10 IoT Enterprise LTSC (20	021)			
Processor		Intel Core i3	(12th Gen)	Intel Core i5 (12th Gen)	Intel Core i3 (12th Gen)			
Memory		8 GB DD	R4 RAM	32 GB DDR4 RAM	8 GB DDR4 RAM			
OS Drive		M.2 256 GB PCle N	VMe Class 35 SSD	M.2 256 GB PCle N	VMe Class 35 SSD			
Video Data Drive		1 SATA drive, 4 TB HDD	1 SATA drive, 8 TB HDD	-	-			
Storage				256 GB M.2 SSD	+ 500 GB HDD			
Network Interface		2 × 1 Gigabit Ethe (1000B		2 × 1 Gigabit Ethernet R.	J-45 ports (1000Base-T)			
Video Outputs		2 active (4	4 × mDP)	4 active (4 × mDP)	2 active (4 × mDP)			
Optical Drive				DVD-RW				
Graphics				NVIDIA T1000 (8GB)	Intel Integrated graphics			



\*Avigilon Unity client software at 200% DPI scaling

















### **NVR6 FIPS**

#### MSRP from €17,801

Designed for government agencies and large enterprises - help defend against cyberattacks using the sixth-generation Avigilon Network Video Recorder FIPS (NVR6 FIPS) series. It is pre-hardened to meet FIPS 140-21 level 2 standards for secure network video recording and performs data encryption in transit and at rest. Leverage Motorola Solutions' endto-end FIPS-compliant video security ecosystem with Joint Interoperability Test Command (JITC) Certification<sup>2</sup> for the Department of Defense (DoD) networks to meet robust cybersecurity requirements.

### Specifications





·						
MODEL NAME	PREMIUM FIPS STANDARD FIPS FORM D FORM D					
Part Number	NVR6-PRM-FIPS-FORM-D- <b>C</b> TB NVR6-STD-FIPS-FORM-D- <b>C</b> TB					
Storage Capacity (TB) 🕒	72 96 120 160 200 TB	16 24 32 48 64 TB				
Windows OS	Server 2019 LTSC (STIG-Compliant) - 16 core					
Out-of-band management	iDRAC 9 Enterprise (network disabled for FIPS compliance)					
Support	5YR, 4HR, Mission critical	5YR Next business day				
Networking	6x1G & 4x10G SFP+	6x1G				
Redundancy	RAID6					



- <sup>1</sup> FIPS 140-2 Encryption is currently available only for Avigilon Unity Video (Formerly Avigilon Control Center™) Version 7.
- <sup>2</sup> Avigilon video security solutions are certified by the Joint Interoperability Test Command for the Department of Defense. Refer to the <u>JITC Press Release</u>. Avigilon Video security solutions have been added to the Department of Defense's Information Network Approved. Products List (DoDIN APL). Refer to DoDIN APL Press

















### **ENVR2 PLUS Appliance**


MSRP from €1,628

Unlock AI-powered video analytics with Avigilon's compact ENVR2 PLUS, compatible with any connected video stream and ideal for edge deployments.

### Specifications



MODEL NAME	ENVR2 PLUS
Part Number	ENVR2-PLUS-8P8/8P4
Analytics features	Appearance Search, Facial Recognition, Classified Object Detection, License Plate Recognition
Built-In PoE ports (Total Power Budget)	8 (125W)
Storage capacity	1 × 3.5" SATA 3 hard drive, 4 TB or 8 TB
Throughput (Recording/Playback in Mbps)	130 / 80
Operating temperature	0° C to 50° C (32° F to 122° F)
Dimensions (L x W x H)	195 mm × 254.5 mm × 44.45 mm (7.67" x 10.0" × 1.75")

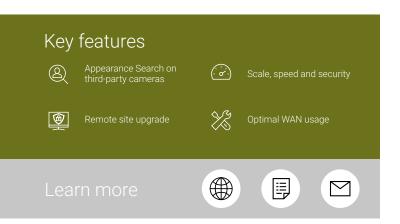
















# HD Video Appliance 3X (HDVA3X)

MSRP from €2,054

Achieve a simplified security system while reducing installation time and complexity with the Avigilon HDVA3X. Enjoy a seamless and hassle-free experience managing your security systems with our one-stop, preconfigured solution.

#### Specifications HDVA3X 8-PORT HDVA3X PRO 24-PORT HDVA3X PRO 16-PORT 2TB, 4TB, 8TB 6TB, 9TB, 12TB 12TB. 18TB. 24TB Storage Capacity Microsoft Windows 10 IoT Enterprise v21H2 LTSC **Operating System** Optional Microsoft Windows Server 2019 LTSC Upgrade Kit (AS3X-S19-UPG) available Up to 30W/Port Up to 30W/Port Up to 30W/Port **Total PoE Output** (120W Total) (240W Total) (360W Total) Max. Recording Throughput Up to 100 Mbps Up to 300 Mbps Max. Number of Video Data Hard Drives 1 × 3.5" SATA RAID 5 — Up to $4 \times 3.5$ " SATA **Out-of-band Management** Optional IPMI Module (VMA-AS3X-IPMI) available

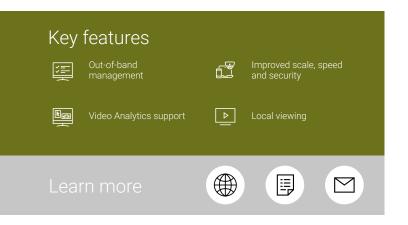















### Avigilon Video Archive

**MSRP from €72,468** 

Cost-effective storage option that provides a path for expanding video archives incrementally over time, delivering exceptional reliability with near-zero downtime.

### Specifications



		AVICH ON VII	NEO ADCLUME					
	AVA-HED1-CTB <sup>1</sup>	AVIGILON VII	DEU ARCHIVE	AVA-EXP1-CTB <sup>1</sup>				
225	488	751	263					
5U								
4 per Head Unit when attached directly; 12 per Head Unit when using 2 network switches <sup>2</sup>								
Erasure coding								
iSCSI								
	_	225 488	AVA-HED1- CTB1  225 488 751  4 per Head Unit when attached directly; 12 per Erasure	4 per Head Unit when attached directly; 12 per Head Unit when us  Erasure coding	AVA-HED1- CTB1  AVA-EXP1- CTB1  225 488 751 263 5U  4 per Head Unit when attached directly; 12 per Head Unit when using 2 network switch  Erasure coding			



- <sup>1</sup> Head units house the controllers that connect either directly with up to 4 NVRs or indirectly with up to 12 NVRs using 2 network switches. Expansion units need to be installed in the same rack and connected to Head Units to expand the capacity up to 1.5PB.
- $^{\rm 2}$  12 NVRs must be connected through 2x 10GbE SFP+ network switches to ensure redundancy.
- The switches are not sold by Avigilon and should be sourced by the customer. Each switch must support at least 12x Downlink ports (1 per NVR) and 4x Uplink ports.

Part number varies based on total storage capacity ().















MSRP from €7,546



### Al Appliance 2

Enhance the security of your site by incorporating Avigilon Al-powered video analytics on third-party and Avigilon's non-analytic cameras.


### Specifications



MODEL NAME	AI APPLIANCE 2		
Part Number	VMA-AIA2-CG1 VMA-AIA2-CG2		
Max. Number of Channels	25 50		
Number of Channels Included	10	30	
Form Factor	2U rack mount		
Local Monitor Output Support	No		
Embedded Network Switch	No		

#### Camera & analytics support

		NON-ANALYTIC CAMERAS <sup>1</sup>		
MODEL	Classified Object Detection Only <sup>3</sup>	Classified OR Object Detection + OF Appearance Search <sup>2</sup>	Classified Object Detection + Appearance Search <sup>2</sup> + Facial Recognition	
Al Appliance 2 CG2	50	50	43	
Al Appliance 2 CG1	25	25	22	

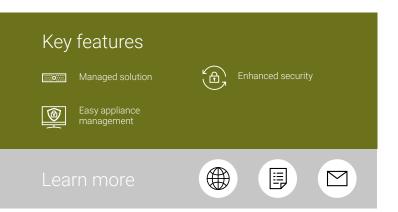

- <sup>1</sup>These performance figures are based on validation testing by Avigilon, using Avigilon Unity Video software version 7.6.4. Assumes appliance-wide average per camera rates of classified objects leaving the field of view:
  - · H5A cameras: one every second
  - H4A cameras: one every two seconds
  - $\bullet \ \ \text{Non-analytics cameras running Classified Object Detection: one every second}$
- <sup>2</sup> Additional licenses may be required. For more information, contact Avigilon Sales.

<sup>&</sup>lt;sup>3</sup> For cameras at 2 MP and 30 images per second (ips).















MSRP from €704


### IP Horn Speaker

The IP Horn speaker integrates with Avigilon Unity Video software, equipping operators with superior situational awareness to address trespassing or deter intruders.

### Specifications



MODEL NAME	IP HORN SPEAKER 2		
Part Number	ACC-SPEAKER		
Power Source	PoE/PoE+		
Power Consumption	13 W (Using PoE), 22 W (Using PoE+)		
Amplifier Rated Output	8 W (Using PoE), 15 W (Using PoE+)		
Sensitivity	112 dB (1 W, 1 ml (500 Hz - 2.5 kHz, peak level) 124 dB (at PoE+ powered, 15 W, 1 ml (500 Hz - 2.5 kHz, peak level) 121 dB ( at PoE powered, 8 W, 1 ml (500 Hz - 2.5 kHz, peak level l		
Frequency Response	280 Hz - 12.5 kHz		
Sampling Frequency	8 - 48 kHz		
Audio Compression Method	G.711u/a, G.722, L16 (8 - 48kHz)		
Environmental	IP66		
Operating Temperature	30 'C to +55 'C (-22 'F to +131 'F		
Warranty	5-year warranty		

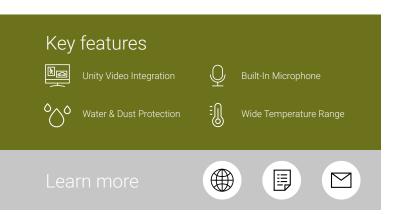















MSRP from €5,035

### **Alta Cloud Connectors**

Alta Cloud Connectors make existing cameras smart with uniquely scalable, real-time AI and provide a frictionless transition to the cloud.







### Specifications

MODEL NAME	A500	A750	A1000	A2000	A3000
PART NUMBER	APP-500-8-DG APP-500-16-DG	APP-750-32-DG	APP-1000-24-DG APP-1000-48-BT	APP-2000-80-BT APP-2000-160-BT APP-2000-80-SFP APP-2000-160-SFP	APP-3000-80-BT APP-3000-160-BT APP-3000-80-SFP APP-3000-160-SFP
Туре	Workstation Appliance	Workstation Appliance	Workstation Appliance	2U Rack-mounted	2U Rack-mounted
Hard Disks	3	3	4	12	12
Cameras Supported	Up to 25	Up to 50	Up to 75	Up to 100	Up to 200
GPU	Nvidia GeForce	Nvidia GeForce	Nvidia Quadro RTX	Nvidia Quadro RTX	2 x Nvidia Quadro RTX
SATA Storage	Up to 24TB raw, 16TB net	Up to 48TB raw, 32TB net	Up to 64TB raw, 48TB net	Up to 192TB raw, 160TB net	Up to 192TB raw, 160TB net

### Key features



Extend real-time AI to third party cameras



your entire deployment in a single interface



Enhanced security with encryption and dedicated TPM



Bring cloud benefits to existing cameras and sensors



Provides resilience and local access to video









#### Cloud connector accessories

Туре	PART NUMBER
Mounting Rack for A1000	APP-RCK-1000
UK Power Cable	AACC-PWC-UKS
US Power Cable	AACC-PWC-USS
EU Power Cable	AACC-PWC-EUS
IEC C13-C14 Power Cable	AACC-PWC-IECS
4TB Replacement Drive	AACC-DRV-04TB
8TB Replacement Drive	AACC-DRV-08TB
12TB Replacement Drive	AACC-DRV-12TB
16TB Replacement Drive	AACC-DRV-16TB





## Body-worn Cameras

Commercial organizations need a mobile video security solution that protects people and proves professionalism. Cutting-edge body-worn cameras from Motorola Solutions capture high-quality audio and video from the wearer's perspective. Seamless integration with Avigilon Unity Video software via WiFi enhances situational awareness in the control room, delivering a powerful new narrative and enabling a smarter response.















### VT100 Cameras


### MSRP from €322

Designed to complement your current security function, providing additional body-worn protection to staff throughout any organization. Available for global use in commercial applications.



### Specifications

Model Name		VT100
Part Number		VT-100-N
	Dimensions (H x W x D)	3.1 x 2.0 x 0.9 in (80 x 51 x 22 mm)
	Weight	2.54 oz (72 g)
Features	Charging	Up to five hours from fully flat battery
	Bluetooth	No
	Recording Storage	16 GB
	Recording Time	Up to three hours
Video	Battery On Standby	Six months
video	Battery Type	Lithium-Ion
	Horizontal Field of View	130 degrees
	Peer-Assisted Recording	No
WiFi	WiFi Specification	802.11 b/g/n (2.4 GHz & 5 GHz)
	WiFi Security	WPA2-PSK
	WiFi Streaming	640x360 15 fps. Compatible with ONStream.

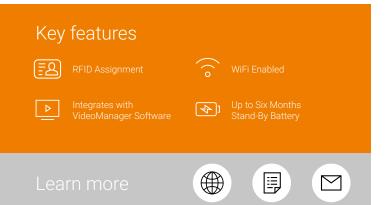

### Security & certification

Internal solid state
Sealed unit, no user access to storage media or battery
Yes
Yes
Yes
IP54 weather rating

















### VB400 Cameras


### MSRP from €557

Ruggedized camera with advanced recording and communications features enabling security professionals in commercial organizations to perform their best when it matters most.



### Specifications

•		
Model Name		VB400
Part Number		VB-400-64 <b>- F</b>
	Dimensions (H x W x D)	2.7 x 3.5 x 1.04 in (68 x 89 x 26.6 mm)
Features	Weight	5.7 oz (162 g), plus mounting
reatures	Charging	Up to eight hours from fully flat battery
	Bluetooth	BT 2.1 + EDR, BLE 4.2
	Recording Storage	64 GB
	Recording Time	Up to 12 hours
Video	Battery On Standby	48 hours
video	Battery Type	Lithium-Polymer
	Horizontal Field of View	120 degrees
	Peer-Assisted Recording	Within 32.8 ft (10 m) of another device
	WiFi Specification	802.11 a/b/g/n (2.4 GHz & 5 GHz)
WiFi	WiFi Security	WPA2-PSK
	WiFi Streaming	640 x 360, 25 or 30 fps
FIXING AND MOUNT O	PTIONS (F	
QR-N	Quick Release Fixing	Suitable for attaching to the quick release fixing options
KF-N	Klick Fast Harness	Suitable for directly attaching to the klick fast fixing options
VF-N	Close-Fit Mount	Suitable for attaching to the close fit mount options
ALIG	Alligator Clip	Comes with a factory fitted alligator clip

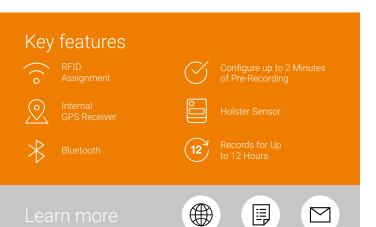

### Security & certification

Storage Media	Internal solid state	
Access	Sealed unit, no user access to storage media or battery	
EMC Certification	Yes	
FCC Certification	Yes	
CE Certification	Yes	
Environmental Certification	IP67 weather rating	

Part number varies based on fixing or mount options ().















MSRP from €8.70\*

# Body-worn Camera Accessories

There are a variety of accessories to ensure your body-worn camera can be fixed securely to any uniform or clothing.











### Compatibility

Compatibility	V				
Model Name	VB-400 with Quick Release Back	VB-400 with Klick Fast Back	VB-400 with Close Fit Back	VB-400 with Alligator Clip	VT100
Part Number	VB-440-64-QR-N	VB-440-64-KF-N	VB-440-64-VF-N	VB-440-64-ALIG	VT-100-N
Custom VB400 Front-button Sticker (Design) (VB-400-ID-CUS-ART)	Compatible	Compatible	Compatible	Compatible	
Custom VB400 Front-button Sticker (Print) (VB-400-ID- CUS-100 or 250/1000/5000)	Compatible	Compatible	Compatible	Compatible	
Klick Fast Quick Release Stud (VB-400-QR-KFSTUD)	Compatible				
Klick Fast Quick Release Tilt Mount (VB-400-QR-KFTILT)	Compatible				
Klick Fast Quick Release Wide Tilt Mount (VB-400-QR- KFTILT2)	Compatible				
Quick Release Sports Camera Pillar (VB-400-QR-SPORT)	Compatible				
Klick Fast 3-Point Chest Harness (KF-HARN3) <sup>1</sup>	Compatible	Compatible			
Klick Fast 4-Point Chest Harness (KF-HARN4) <sup>1</sup>	Compatible	Compatible			
Klick Fast Shoulder Harness (KF-HARN5) <sup>1</sup>	Compatible	Compatible			
Klick Fast Uniform Screw-on Dock (KF-SCREW) <sup>2</sup>	Compatible	Compatible			
Klick Fast Radio Loop Dock (KF-LOOP) <sup>2</sup>	Compatible	Compatible			
Klick Fast Dock Clamp (KF-DOCKCLAMP) <sup>2</sup>	Compatible	Compatible			
Klick Fast Dock Epaulette (KF-DOCKEP) <sup>2</sup>	Compatible	Compatible			
Klick Fast Magnetic Mounting Set (w/o magnet) (KF-MAGMOUNT) $^{2}$	Compatible	Compatible			
Klick Fast Dock for MOLLE Vests (KF-MOLLEVEST) <sup>2</sup>	Compatible	Compatible			
Close-Fit Magnetic Mount (VB-400-VF-MAG)			Compatible		
Close-Fit Double MOLLE Mount (VB-400-VF-MOL2)			Compatible		
Custom VT100 Front-panel ID Card (Design) (VT-100-ID-CUS-ART)					Compatible
Custom VT100 Front-panel ID Card (Print) (VT-100-ID-CUS-250 or 1000 /5000)					Compatible
VT100 Rotatable Long Alligator Clip (VT-100-FIX-ALIG)					Compatible
VT100 Epaulette (Shoulder) Clip (VT-100-FIX-EP)					Compatible
VT100 Sports Camera Pillar (VT-100-FIX-SPORT)					Compatible
VT100 Klick Fast Stud (VT-100-FIX-KF-ALT)					Compatible
Lanyard with 5 Breakpoints and 2 Loops (AC-LANYARD-05)					Compatible

<sup>\*</sup>Based on AC-LANYARD-05.

<sup>1</sup> Klick Fast Harnesses are compatible with the VB-440-64-QR-N when used in conjunction with Klick Fast Quick Release Fixings. Also available for the VB-440-64-KF-N camera.

<sup>&</sup>lt;sup>2</sup> Available for the VB-440-64-QR-N when used in conjunction with Klick Fast Quick Release Fixings.















### Body-worn Camera Docks

MSRP from €74

For downloading of video and rapid charging of body-worn cameras.



flat battery

Single USB to PC

5V USB





flat battery

Single USB to PC

5V USB



flat battery

Single USB to PC or

DockController,

and a mains adaptor for power

12V/5A PSU, input 100-240V

(PSU supplied)

MODEL NAME	VT100 1-PORT DOCK	VT100 14-PORT DOCK	VB400 1-PORT DOCK	VB400 14-PORT DOCK
Part Number	VT-100-SOLO	VT-100-DOCK14 <sup>1</sup>	VB-400-DOCK-SOLO	VB-400-DOCK14 <sup>2</sup>
Dimensions (H x W x D)	2.95 x 3.54 x 1.57 in (75 x 90 x 40 mm)	1.5 x 7.87 x 17.17 in (38 x 200 x 436 mm)	2.95 x 3.54 x 1.57 in (75 x 90 x 40 mm)	1.5 x 7.87 x 17.17 in (38 x 200 x 436 mm)
Weight	8.6 oz (244 g)	4.85 lb (2.2 kg)	8.6 oz (244 g)	4.85 lb (2.2 kg)
Scalability	Up to four 1-Port Docks can be connected to a DockController	Multiple docking stations can be connected to a single PC or DockController	Up to four 1-Port Docks can be connected to a DockController	Multiple docking stations can be connected to a single PC or DockController
Charging	This dock can charge a VT100 in up to five hours from a fully	This dock can charge a VT100 in up to five hours from a fully flat	This dock can charge a VB400 in up to eight hours from a fully	This dock can charge a VB400 in up to eight hours from a fully

battery

Single USB to PC or

DockController, and a mains

adaptor for power

12V/5A PSU, input 100-240V

(PSU supplied)

**Power Requirement** 

Connection

Specifications



<sup>&</sup>lt;sup>1</sup> Part number varies based on power outlets: VT-100-DOCK14/US, VT-100-DOCK14/UK, VT-100-DOCK14/EU, VT-100-DOCK14/ROW.

<sup>&</sup>lt;sup>2</sup> Part number varies based on power outlets: VB-400-DOCK14/US, VB-400-DOCK14/ UK, VB-400-DOCK14/EU, VB-400-DOCK14/ROW.















### RFID Reader & Accessories

MSRP from €631

Connect an RFID reader to a DockController device to make body-worn camera allocation quicker and easier, using your organization's existing ID or access cards.



### Specifications

MODEL NAME		RFID READER
Part Number		RF-220
	Typical Usage	Attached to a DC-200 via USB connection
General Information	Management Software	VideoManager
General information	Warranty	1 year return to manufacturer warranty
	Snap-in Holder	The Snap-in Holder is used to fix the RF-220 to a flat surface
Oine O Weinka	Dimensions (H x W x D)	3.5 x 2.2 x 0.7 in (88 x 56 x 18 mm)
Size & Weight	Weight	4.1 oz (115 g)
	Frequency	Low Frequency: 134.2 kHz, High Frequency: 13.56 MHz
	Read / Write Distance	4 in (100 mm) for both Low Frequency and High Frequency
Technical Specifications	Supported Compatible Card Standards	Including but not limited to: ISO1443A (e.g. MIFARE Classic) ISO14443B (e.g. HID iCLASS) ISO15693 (e.g. HID iCLASS SE) Unity Access door access cards

### Key features









#### **RFID Reader Accessories**

Туре	Part Number
RFID Sticker-Style Tag (x10)	RF-STICKER-10
RFID-Card (x10)	RF-CARD-10

RFID Readers and accessories are compatible with VT100 & VB400 body-worn cameras















MSRP from €626



### **Dock Controller**

Simultaneously manage up to 84 body-worn cameras while also assigning them to operators using VideoManager software.



### Specifications

MODEL NAME		DOCK CONTROLLER
Part Number		DC-200/ R
	Typical Usage	Connected to VideoManager over Ethernet, with multiple docks attached via USB
General Information	Management Software	VideoManager
	Warranty	1 year return to manufacturer warranty
Size & Weight	Dimensions (H x W x D)	6.1 x 5.3 x 1.5 in (154 x 136 x 37 mm)
oize a weight	Weight	23.3 oz (660 g)
Scalability	Body-Worn Camera Support	Connect up to 84 body-worn cameras to one DC-200. Ideal for use with 14-port docks.  Can also be used with up to 4 individual 1-port docks.
	Unlimited VideoManager Connectivity	There is no limit on the number of DC-200s that can be connected to an instance of VideoManager
	Operating Temperature	32 to 104 °F (0 to 40 °C)
Technical	Storage Temperature	-67 to +158 °F (-55 to +70 °C)
Specifications	Input Voltage (to supplied external power supply)	100 - 240V, 47 - 63Hz
	Maximum Power Consumption	20W
	High-Speed Footage Downloads	Gigabit Ethernet Port (1000/100/10 mbps) for rapid footage download and body-worn camera assignment
	RFID-Compatible	Attach an RFID reader to one of the DC-200's USB ports to enable quick body-worn camera assignment
Connectivity	Bandwidth Restrictions	Apply bandwidth rules to individual DC-200s to control how much footage is uploaded to VideoManager, and when
	High-Priority Configuration	Prioritize certain DC-200s to ensure that their footage is downloaded to VideoManager first
	Slow Connection Configuration	DC-200s with this setting enabled will continuously try to offload footage to VideoManager, ignoring the bandwidth limit
	Shared Bandwidth Groups	Add multiple DC-200s to one bandwidth group to ensure that the bandwidth limit is shared equally between them

### Key features






Supports RFID Touch-Assign



### Regional compatibility

US	United States
UK	United Kingdom
<b>(II)</b>	Europe
AUS	Australia
ROW	Rest of World

Part number varies based on regional compatibility (3).

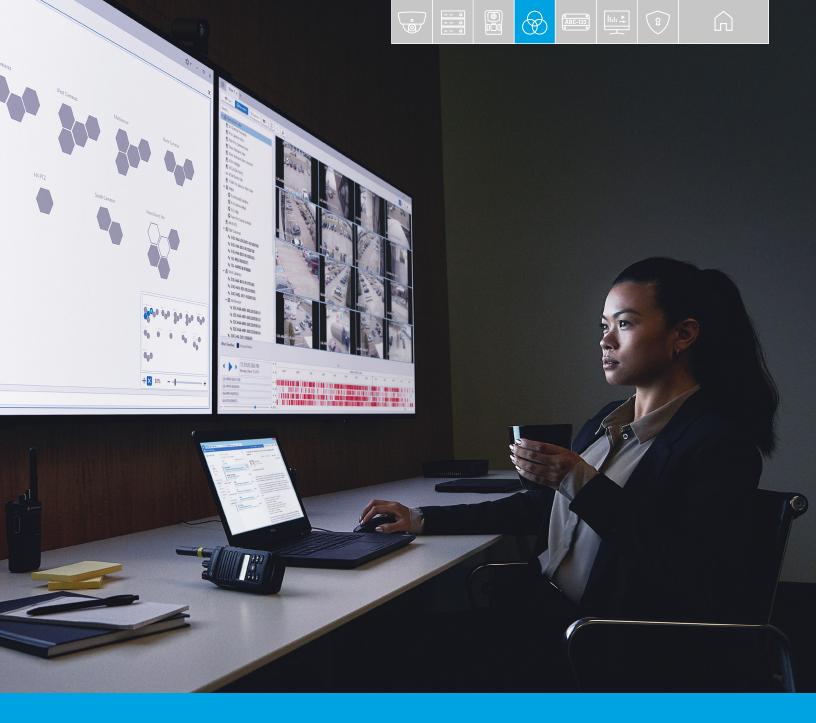

# Motorola Solutions Integrations

Motorola Solutions integrations offer an integrated approach to fixed video and security applications. Experience an unparalleled ecosystem that unifies voice, video, data, analytics and software.















### Concealed Weapons Detection

Motorola Solutions Concealed Weapons Detection (CWD)\*, powered by Evolv Technology, helps to proactively keep people and assets safe by using advanced sensors and artificial intelligence to detect a wide range of concealed weapons and threats. It is the world's first and only touchless security screening solution that is conducive to supporting post-pandemic security screening requirements.

### Specifications

		INDOOR MODELS OUTDOOR MODELS			
PHYSICAL		Standard Width	Wide Width	Standard Width	Wide Width
Width	Single-Lane	66.7 in (169.4 cm)	74.7 in (189.7 cm)	70.1 in (178.1 cm)	78.1 in (198.3 cm)
	Dual-Lane Dual-Lane	116.4 in (295.7 cm)	132.4 in (336.2 cm)	116.7 in (296.4 cm)	132.6 in (336.7 cm)
Depth		40.3 in (102.4 cm)	40.3 in (102.4 cm)	46.8 in (118.9 cm)	46.8 in (118.9 cm)
Lana Onanina	At Base	32.0 in (81.3 cm)	39.8 in (101.0 cm)	28.9 in (73.5 cm)	36.4 in (92.4 cm)
Lane Opening	Above Base	42.0 in (106.7 cm)	49.8 in (126.4 cm)	38.9 in (98.8 cm)	46.4 in (117.9 cm)
	TX Tower	74.1 in (188.1 cm)	74.1 in (188.1 cm)	74.7 in (189.8 cm)	74.7 in (189.8 cm)
	RX Tower	73.7 in (187.2 cm)	73.7 in (187.2 cm)	73.7 in (187.2 cm)	73.7 in (187.2 cm)
Height	Mat	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip
	TX Tower	201.25 lbs. (91.28 kg)	201.25 lbs. (91.28 kg)	216.95 lbs. (98.40 kg)	216.95 lbs. (98.40 kg)
	RX Tower (2x)	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each
	Mat and Cables (2x)	11.5 lbs. (5.2 kg) each	13.5 lbs. (6.12 kg) each	11.5 lbs. (5.2 kg) each	13.5 lbs. (6.12 kg) each
Weight	Wireless Tablet & Floor Stand (2x)	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each
	Wireless Tablet & Desktop Stand (2x)	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each
	Total System Weight (Single-lane)	300.85 lbs. (136.36 kg)	302.85 lbs. (137.28 kg)	316.55 lbs. (143.48 kg)	318.55 lbs. (144.4 kg)
	Total System Weight (Dual-lane)	400.45 lbs. (181.65 kg)	404.45 lbs. (183.75 kg)	416.15 lbs. (188.77 kg)	420.15 lbs. (190.87 kg)
ELECTRICAL					
Power		115VAC - 230VAC (+/-10%); single phase; with power cord supplied			pplied
Power Consumpt	mption 200W max power consumption				
COMPONENTS					
Cameras	2 situational awareness cameras (front and rear) <sup>1</sup>				
Tablet Diamley		15.6inch display (39.6cm), 2 per lane (1 Floor and 1 Desktop Stand)			
Tablet Display		Standard or Outdoor tablets based on optional Outdoor unit			



#### Physical configuration

CONFIGURATION	DESCRIPTION
2 lane	From the perspective of the security operator watching people exit the towers, the receiver towers are on both sides of the center transmitter tower.
1 Iane, Right Side	From the perspective of the security operator watching people exit the towers, the receiver tower is on the right side of the transmitter tower.
1 lane, Left Side	From the perspective of the security operator watching people exit the towers, the receiver tower is on the left side of the transmitter tower.

<sup>\*</sup>Available to customers only in North America.

<sup>&</sup>lt;sup>1</sup> Camera ports are isolated from Express internal and external networks.


















### Orchestrate

An intuitive, cloud-based interface tool to configure, automate and manage workflows that control Motorola Solutions' integrated security and safety technologies. Orchestrate helps automate your security operations by seamlessly integrating into Avigilon's on-premise and cloud solutions.

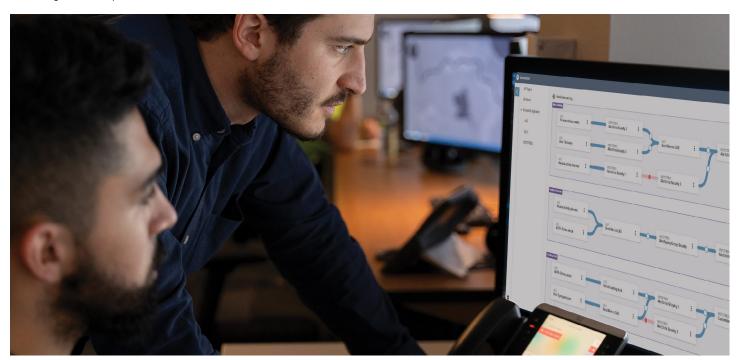

#### Why choose orchestrate?

Our unified technology ecosystem spans end-to-end incident scenarios on one platform, enabling cross-team communication and automatic workflows for a faster response. Al and digital business logic allows personnel to detect, analyze, communicate and manage events more efficiently, and through proactive decision making, can even prevent incidents from escalating in the first place.



Use Orchestrate to expedite incident detection and respond faster with automated radio alerts triggered by video analytics events using the integration with Avigilon Alta and Unity video solutions.



Streamline access control operations and automate control of wireless locks to deny or allow access to individuals using the integration with Avigilon Alta and Unity access control systems.




















### Rave Mobile Safety Suite

For a large enterprise organization who wants to deliver more effective communications, Rave Mobile Safety Suite offers easy-to-use solutions for critical communication and collaboration that enable you to manage incidents, increase operational resiliency and help save lives.

Currently only available in the U.S.

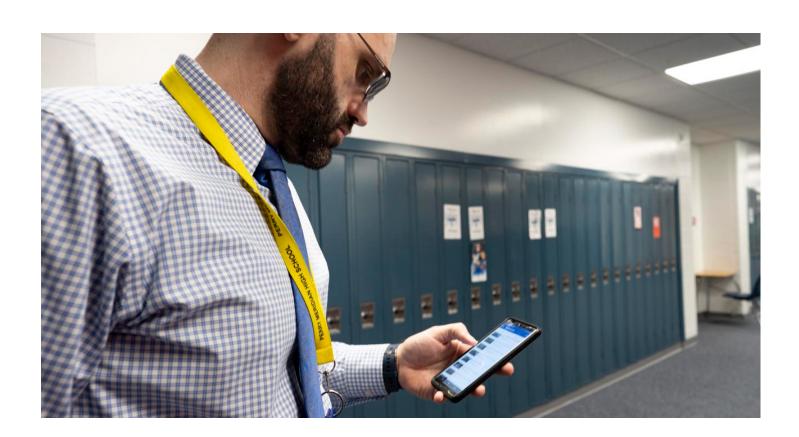

### Key features



Easy-to-use platform enables connected



Enhance emergency preparedness and 9-1-1 response



Enable high-volume, multimodal, two-way communications to stay informed



Stay connected and maximize the safety of your employees and facilities.






















### Rave Panic Button

The Rave Panic Button is a leading emergency notification and response solution that delivers instant connection to first responders with the push of a button. The Panic Button empowers you to communicate any type of emergency while simultaneously connecting with on-site personnel and others involved to keep everyone informed and engaged throughout a situation.

Currently only available in the U.S.

#### Specifications

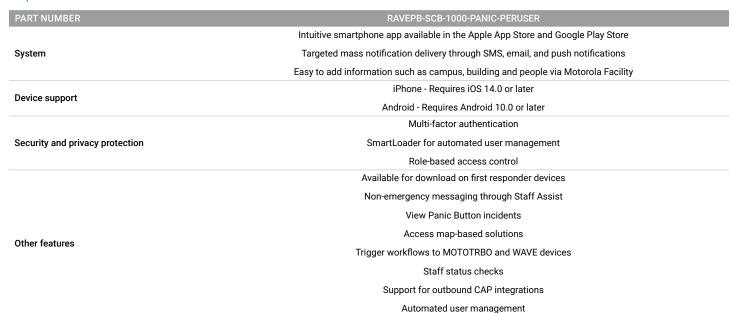





















### Rave Alert


Rave Alert is a leading mass notification system offering reliable, multimodal messages in three clicks. Its easy-to-use interface, seamless device connections and customized communication make it the most efficient and effective solution for emergency and non-emergency messaging.

Currently only available in the U.S.



#### Specifications

PART NUMBER	RAVEPB-SCB-1000-ALERT-PERUSER
	Web-based interface available via any internet-connected device
System	Public safety grade infrastructure
	Two billion messages sent per year with 99.999% service availability
Support	Dedicated support 24 hours a day, 365 days a year
Зарроге	Self-service training portal, including live sessions and in-app tutorials
	Single sign-on via LDAP/CAS/SSO/Shibboleth
Security and privacy protection	SmartLoader for automated user management
Security and privacy protection	Role-based access control
	SOC 2 Type II attestation
	Targeted notifications
	Automated weather alerts via the National Weather Service
	SMS opt-in keywords
Other features	Common Alerting Protocol (CAP) and REST API integrations available
Other reatures	Automated notifications
	Trigger workflows via Orchestrate
	One-click conference bridging
	Real-time reporting

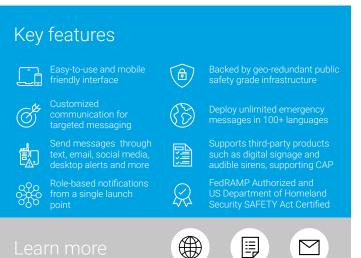

<sup>1</sup> Per full-time employee





## License Plate Recognition Solutions

License plate recognition (LPR) systems from Motorola Solutions aren't one-size fits all, but rather designed for specific environmental needs. Our purpose-built applications for enterprise ensure your data is actionable and secure. Add an unmatched layer of efficiency to your parking and security operations with license plate recognition detections, patented vehicle location analytics and plate-based enforcement tools.

















### VehicleManager Enterprise

MSRP from €4,350

Help your team instantly transform license plate recognition data into actionable intelligence with VehicleManager Enterprise. Its integration into Avigilon Unity Video allows businesses to share their license plate reads collected by Unity Video software with law enforcement agencies for guicker investigations.

Through this collaborative license plate-sharing program, businesses can aid law enforcement agencies in detecting and responding to Be-On-the-Lookout (BOLOs) vehicles without directly taking action, ensuring a safer outcome for the community.

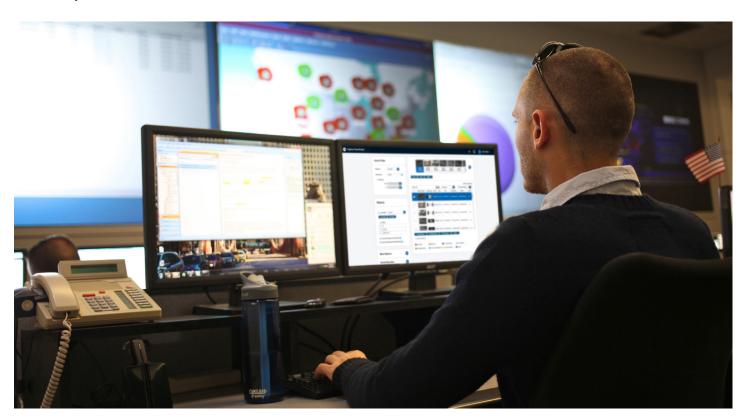

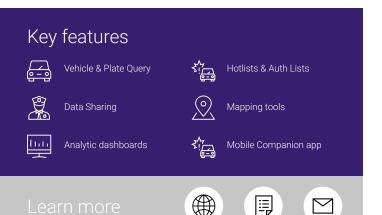

VehicleManager Enterprise is only available in North America at this time. International users will continue to use ClientPortal















### L6A Enterprise LPR Camera

Fusing industry-leading video streaming capabilities with cutting-edge LPR technology, scan license plates and stream video footage with the L6A. Built with two lenses, this multipurpose camera accurately captures vehicle data, increases awareness and provides analytical capabilities beyond what a traditional security or LPR camera could do alone.



### Specifications

MODEL NAME	L6A ENTERPRISE LPR CAMERA	
Part Number	LPR-VSF-L6A-7IR LPR-VSF-L6A-8IR	
Resolution	3 MP	
Lanes Detected	2	
	1/2.9" global shutter color context	
Image Sensor	1/2.9" global shutter monochrome LPR	
Max. Image Rate	30 fps	
Max. IR Illumination Distance	75m (250ft)	
Fundamental	IP67 Weather Rating	
Environmental	IK10 Impact Rating	

LENS (REMOTE ZOOM AND FOCUS)		
5 - 135 mm,	Horizontal Angle of View	(4:3) 60° – 4°
Remote Focus	Vertical Angle of View	(4:3) 45° – 3°
and Zoom, P-Iris	Minimum Illumination (color / mono)	0 lux with IR

#### Key features Dual long-range Onboard LPR analytics motorized lenses Long-range LPR at 0 lux Profile S and M FIPS 140-2 level 3 TPM Native VehicleManager Enterprise integration and Secure Boot H.264, H.265, MJPEG Avigilon Unity Video

### Audio, power & storage

Video Compression Method	H.264, MJPEG (Color Only)
External I/O Terminals	Alarm In, Alarm Out
External Power Source	VDC: 24 V ± 10%
PoE Power Source	POE PD IEEE 802.3at-2009 class 4 (25.50W)
Onboard Storage	32gb with microSD expansion
Onboard Storage	SD/SDHC/SDXC slot (minimum class 4, class 6 or better recommended)

<sup>&</sup>lt;sup>1</sup> This is the part number for the camera module only. Please see accessories page for enclosure and IR illuminator.

<sup>&</sup>lt;sup>2</sup> This is outdoor rated - the kit includes enclosure.











ABC-123





MSRP from €2,259

### H4 License Plate Capture (LPC) Kit

Uses IR illumination, visible light filtering and license plate recognition analytics to capture license plates at typical vehicle speeds in varying lighting conditions.

### Specifications

MODEL NAME	H4 LPC	
Part Number <sup>1</sup>	3.0C-HD-LP-B1	
Resolution	3 MP	
Image Sensor (progressive scan CMOS)	1/2.8"	
Max. Dynamic Range	-	
Maximum Capture Speed	100 km/h (62 mph)	
Max. IR Illumination Distance (single lane / dual lane)	30 m (100 ft) / 14 m (46 ft)	
Environmental	IP66 weather rating <sup>2</sup>	

LENS (REMOTE ZOOM AND FOCUS)		
4.7-84.6 mm,	Angle of View	3.5° – 59°
F1.6, P-Iris	Minimum Illumination (mono)	0 lux

#### Key features



Maximum image rate of 30 fps



Compliant with ONVIF Profile S



H.264 HDSM SmartCodec Technology, Motion JPEG







#### Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz
Audio Input/Output	Line level input/output
External I/O Terminals	4 alarm in, 2 alarm out
External Power Source	VDC: 12 V, VAC: 24 V
PoE Power Source	2x IEEE 802.3at Class 4 PoE+
Onboard Storage	SD/SDHC/SDXC slot (minimum class 4, class 6 or better recommended)

<sup>&</sup>lt;sup>1</sup> This is the part number for the camera module only. Please see accessories page for enclosure and IR illuminator.

<sup>&</sup>lt;sup>2</sup> This is outdoor rated - the kit includes enclosure.

















### L6Q LPR Camera System

MSRP from €6,721

The Motorola Solutions L6Q license plate reader gives you eyes on the road for added safety and security. Combining LPR technology with simple installation and ease of use, this camera can scan license plates on vehicles moving up to 100 mph (161 kmh) in its entire field of view, even in total darkness. Paired with VehicleManager Enterprise, the L6Q adds a layer of efficiency to your security and parking operations with patented analytics and configurable data-sharing capabilities.



### Specifications

nination
e (50 Hz / 60 Hz)
tion Distance1 (high power 940
e (50 Hz / 60 Hz)

CAMERA PERFORMANCE	
Optimal Capture Distance	50 ft (15.2m)
Capture Range	30 - 75 ft (9.1 -22.9m)
Capture Speed Maximum	100 mph (161 km/h) Performance Mode 75 mph (121 km/h) Eco Mode
Field of View	24 ft (7.3 m) (multi-lane coverage)

### Key features



Quick Deployment



Solar, AC/DC, Pole Tap or Battery Operated



Tamper-Proof with Paintable Shroud



Capture Speed: Up to 100 mph (161 km/h)



Multi-lane Coverage



Captures the Vehicle Make,



High Temperature Range: -30 to +55°C (-22 to +131°F)



VehicleManager Enterprise Integration with LPR Analytics










#### Audio, power & storage

Audio Compression Method	N/A
Audio Input/Output	N/A
External I/O Terminals	N/A
External Power Source	12vdc, Solar or Internal Batteries
PoE Power Source	N/A
Onboard Storage	microSD

Purchase: First two years of licensing included. Subscription - Five-year Commitment (includes annual Camera License Key (CLK) and hardware warranty)

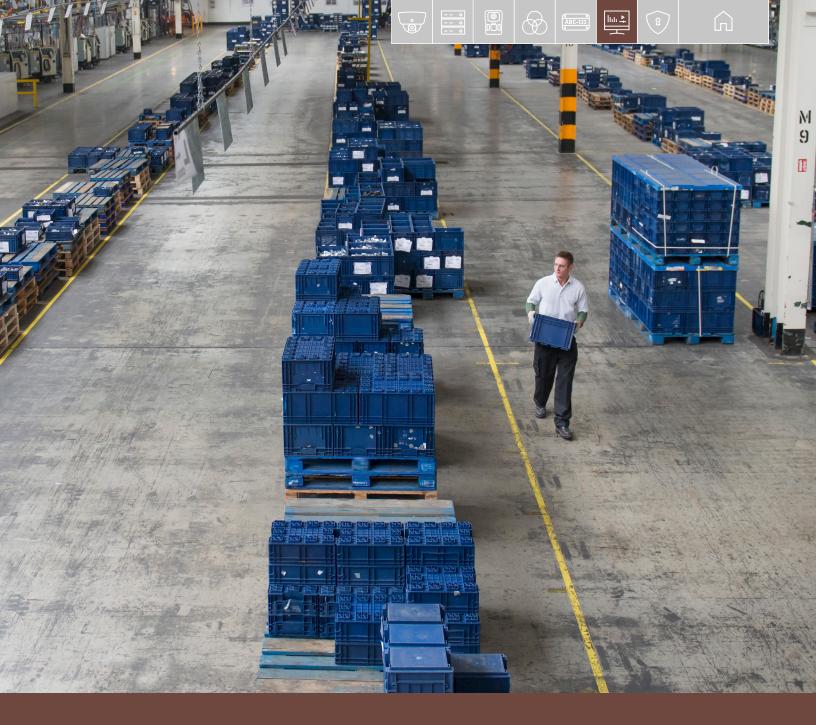



# Video Management Software

Whether you're monitoring video from fixed cameras or your suite of body-worn cameras, our video management solutions provide the control and AI-enabled tools to help ensure critical events do not go unnoticed.













# Avigilon Unity Video software

A cutting-edge video management system that merges on-premise VMS with AI-enabled and cloud-managed capabilities. Never before seen in Avigilon's VMS, Unity Video offers a powerful edge-based analytics platform, to detect potentially critical events such as unusual crowds, expanded vehicle subclasses and also flag auditory disturbances. Experience effortless management of multiple sites and users, a single login credential for all applications and a single installer for all software updates.



### Specifications

•			
MODEL NAME	CORE	STANDARD	ENTERPRISE
Cameras/Server	24	75	>3001
Servers/Site	1	1	>1001
Client Connections per Server	2	10	Unlimited
Rule Triggers	0	51	Unlimited
Self-Learning Video Analytics Event Configuration	No	Υ	'es
Inity Access Identity Verification	No	Υ	'es
Inity Access Identity Search	No	Υ	es
Inity Access Remote Door Access Grants	No	Yes	
ocus of Attention Interface	N	0	Yes
Al Appliance Support	N	0	Yes
Avigilon Pro Camera Support		0	Yes
Alarm Search	ı		Yes
Alarm Notifications and Escalations	No		Yes
Avigilon Appearance Search Technology	No		Yes
acial Recognition Support	cial Recognition Support		Yes
No Face Mask Detection	N	0	Yes
/isible Firearm Detection support <sup>2</sup>	N	0	Yes
icense Plate Event Search and Point-of-Sale (POS)		Yes	
Multi-Camera Privacy-Blurred Export from Avigilon Appearance Search Results	N	О	Yes
ailover Connections and Redundant Recording	N	0	Yes
Active Directory Integration	N	0	Yes
AI NVR Support		Yes	







<sup>&</sup>lt;sup>1</sup> Avigilon has tested up to the number indicated, however no limits are imposed by licensing. Actual limits will depend on the hardware environment. ONVIF is a trademark of ONVIF. Inc.

<sup>&</sup>lt;sup>2</sup> Requires subscription license. Deployable with ONVIF-conformant camera using AI















# Avigilon Unity Video software

### Standard features

- Automatic device discovery
- Support for third-party ONVIF compliant cameras and encoders including dual streaming
- Support for H.265, H2.654, MPEG4, MJPEG and JPEG2000 codecs
- HDSM<sup>™</sup> and HDSM SmartCodec<sup>™</sup> technology support
- Avigilon Unity Video mobile app for iOS and Android
- Light and dark user interface themes
- · Unusual Motion and Activity Detection timeline filtering with Skip Play
- Intelligent Motion, thumbnail and event search

- Two-factor authentication and emergency privilege override
- Two-person authenticated recorded video viewing
- Unity web client
- FIPS 140-2 encryption
- Occupancy Counting analytics\*
- Support for edge-based video analytics to go beyond video and object analysis by incorporating audio capabilities such as gunshot detection, crowd detection and more vehicle subclasses in Unity Video
- Multi-camera export
- System & motion event email notifications







\* Cloud connected sites only















# Avigilon Unity Cloud Services

Avigilon Unity Cloud Services allows you to seamlessly integrate your on-premise video security with cloud-managed functionality for a robust organization-wide security management platform. Enable a modern cloud-connected user experience to view live and recorded video to monitor sites and manage system health.




### Specifications

	Anywhere Access Organizations with distributed locations can easily access their Unity Video sites securely from anywhere o or mobile device.	
	Easy Remote Access	Remotely monitor multiple locations and cameras to quickly detect, verify and act on events.
Centralized Access	Cloud Connectivity to Unity Video Sites	Connect Unity Video sites to the cloud to converge media access, system management, and integrations.
	Tools for everyday operation	Access live and recorded video, create and view bookmarks, manage PTZ controls, and export videos to a local drive.
	Enhanced Situational Awareness	Provides timely and proactive responses to analytic alarms, sent from Unity Video software as push notifications directly to the Unity Video Mobile 3 app.
	Firewall Traversal Firewall traversal enables secure remote access with minimal or no firewall reconfiguration.	
Security	Federated Authentication	Centralize administration of user identities and use corporate credentials to access suite of Avigilon Unity Video applications.
	Seamless User Provisioning	Provisioning users is simple, as existing Unity Video group privileges are inherited for web client or mobile app viewing.
	Real-time Awareness	Confirm the operational status of your deployment to prioritize site maintenance activities and optimize uptime across all system components.
System Health	Health Dashboard	Review a single health dashboard that rolls up the active status of all recorders and connected cameras.
Monitoring	Remote Configuration Access	Access configuration details of recorders and cameras across all cloud-connected Unity Video sites.
	Remote Site Upgrades  Push software upgrades remotely to one or more Unity Video sites simultaneously, ensuring all of yo on the latest versions of Unity Video.	
Technical	Compatible Unity Video Unity Video 7.10 or later is required to connect Avigilon Unity Video sites to Unity Cloud Services.	
Specifications	Compatible Unity Video Mobile Platform Avigilon Unity Video mobile app is required to support remote access via a mobile device and to receive anal from Unity Video.	

### Key features

The Unity Cloud Services platform enables a modern cloudconnected user experience, accessible without installation from a web browser. It lays the foundation for Unity Video customers to connect to the cloud and take advantage of capabilities and features that provide centralized access.

Our platform provides for the delivery of value-add services, helping to improve your up-time, and enhance productivity, while also strengthening your security. The Unity Cloud Services platform simplifies the management of physical security systems for customers.

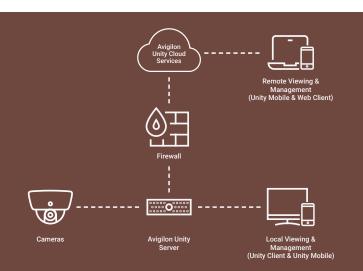






















# Avigilon Decision Management System (DMS)

Enable a 100% cloud-based decision management module within Avigilon Unity Cloud Services. Streamline investigations with an intuitive interface. Easily unify video, access control and intrusion management into a single screen.

Protect your people and property with the DMS module's multi-faceted security approach, leveraging its deep integration with Motorola Solutions' cloud-based video and access control platforms. Manage video analytics alerts and access control events, review threats and identify unauthorized individuals and deny their access to sensitive areas through the DMS' integration with Avigilon Unity, Alta and Orchestrate.

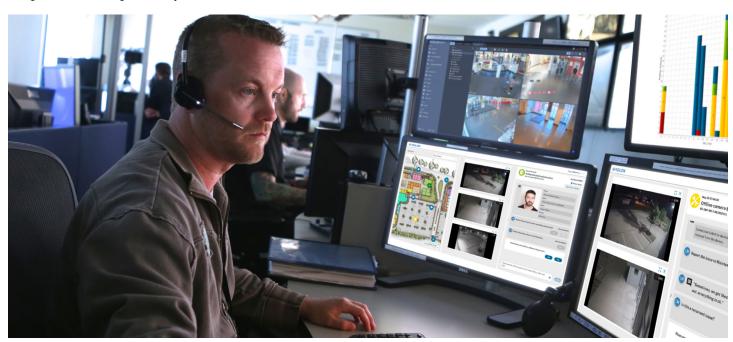

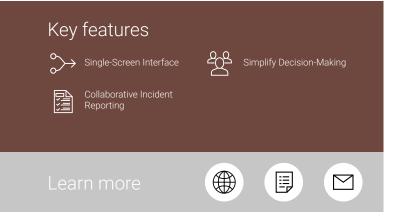

















### Smart Assurance Plan

The Avigilon Smart Assurance Plan offers optimal protection for your Avigilon Unity Video management software in the form of annual and multi-year upgrade plans, ensuring you always have timely access to the newest capabilities and services over the life of your plan.



### Plan details


1-Year 3-Years 5-Years

### All plans include:

Eligibility to all Avigilon Unity Video software versions released during the life of your plan, which never expires Advanced System Health

Cost certainty on upgrades for the life of your plan

Easy renewal at the end of your plan's term

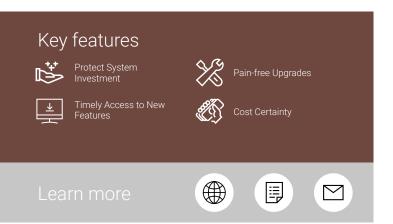

Avigilon Unity Video 7.14.0 or newer is required to use Smart Update parts.















MSRP from €169\*

# VideoManager Software

Supports VT100 & VB400 body-worn cameras

Browser-based system for management of users and devices as well as the managing, storing and sharing of digital evidence.



### Specifications

	Granular Permissions	Users can only access the parts of the VideoManager interface which are relevant to their workflow.
	Granular Sharing	Incidents and videos can be automatically or manually shared between users and groups on VideoManager. Instances can be shared with workers who are not on VideoManager, using time-sensitive links or exports.
	Permissions Overview	Administrators can see permissions associated with a user, and how they got those permissions.
Workflow Control	Priviledge Escalation	Authorized users can temporarily elevate their priviledges for a limited time, in order to perform certain actions on VideoManager.
	Deletion Policies	Configure how long footage is kept on VideoManager before it is deleted.
		Ensure your suite of DockControllers always have the latest firmware, eliminating manual upgrades. Configure a specific timeframe for DockController firmware upgrades, to minimize workflow disruption.
	Comprehensive Audit Trail	A comprehensive audit log of every action performed in the system is created. Users can create and download audit logs to view these actions if necessary.
Security	Access Control Keys	Without a device's access control key, undownloaded footage on a device is inaccessible.
	File Space Encryption	Footage, report and export filespaces are automatically encrypted for extra security.
	Bulk Edit	Large numbers of events can be instantaneously deleted or added to incident collections. Large numbers of body-worn cameras can be assigned or upgraded in parallel.
Scalability	User Groups	Put multiple users in a group for sharing and management purposes. Groups can be supervised by individual users, or other groups.
	Reports Creation	Download reports detailing various aspects of VideoManager activity e.g. when devices were docked and undocked.
	Live Statistics	View real-time statistics with information about how VideoManager is being used.
Technical Specifications	Compatible Server Platforms  Windows Server 2016 Essentials, Standard and Datacenter, Windows Server 2012 R2 Essentials, Standard and Datacenter, Windows 10 Pro and Enterprise and Windows 8.1 Pro Enterprise	
Specifications	Compatible Client Microsoft Internet Explorer 11 (Windows 7/8.1/10), Microsoft Edge 14+ (Windows 10), Firefox 47+ (Windows 10), C (Windows 7/8.1/10, MAC OS X v10.10).	

### Connectivity features

- · Integrates with Avigilon Unity Video management software (via ONStream technology)
- Can be enabled as a central VideoManager, to which other instances of VideoManager ("sites") can be connected
- Connect VideoManager to CommandCentral Vault, for footage storage and correlation with other CommandCentral Suite applications<sup>1</sup>
- Group footage and other important media in an incident for ease of view

### Evidence preparation features

- · Put multiple incidents in an incident collection for sharing and management purposes
- · Redact footage and images using effects like bluring, pixelation and highlighting. Audio, text and zoom redactions are also available
- Non-video media (PDFs, MP4s, JPGs), and videos which were not recorded using VT100 or VB400 can be imported to VideoManager and added to incidents





\*Based on VM-EPL-VT-CONNECT-1.

<sup>1</sup> Requires CommandCentral Vault subscription.
















MSRP from €170

# Avigilon Alta Video

Open, scalable, secure and easy to use, Alta Video is an enterprise-grade, cloud-based Al video management system (VMS) equipped with integrated machine learning capabilities.

### Specifications

орсоттоаттогто			
PART NUMBER	AWA-CLD-1YR AWA-CLD-5YR AWA-CLD-3YR AWA-CLD-10YR		
Device support	Automatic device discovery Third-party IP & encoders H.264 compression MJPEG video compression JPEC2000 video compression		
Streaming	Dynamic Stream selection		
Search	Search by similarity Search by physical characteristics Search by color of clothing Search by event Search by image Search by object Search across all video Smart Presence		
Pervasive Video Analytics	Unusual event detection People counting Vehicle counting Forensic investigation Line crossing Spotlight Audio analytics		
Security and Privacy Protection	HTTPS camera connectivity SRTP support AES video encryption Digital watermarking against tampering RTSP over TLS No default passwords Mandatory access authentication		
Alerting and notifications	Real-time notifications Email event notifications Webhooks Rules tool		

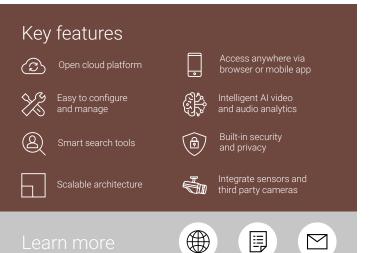




### Additional Alta Video licenses

Product Name	PART NUMBER
Alta Video Audio Recording License	LIC-AUD-REC
Alta 30 Day Cloud Storage License	AWA-CLD-STR-30-XY
Alta 60 Day Cloud Storage License	AWA-CLD-STR-60-XY
Alta 90 Day Cloud Storage License	AWA-CLD-STR-90-XY
Alta 120 Day Cloud Storage License	AWA-CLD-STR-120-XY
Alta 150 Day Cloud Storage License	AWA-CLD-STR-150-XY
Alta 335 Day Cloud Storage License	AWA-CLD-STR-335-XY
Alta Cloud Storage Connect	AWA-CLD-BYO-1Y AWA-CLD-BYO-3Y AWA-CLD-BYO-5Y
Alta Video Access Control Integration License	ACI-INT-1Y ACI-INT-3Y ACI-INT-5Y
Enable face search for a deployment	LIC-FAC-SEA
Alta Video LPR License	LIC-LPR-CHAN-1Y LIC-LPR-CHAN-3Y LIC-LPR-CHAN-5Y
Subscription for Point-of-Sale device connected to Aware (license is per device)	LIC-POS-REG-1Y LIC-POS-REG-3Y LIC-POS-REG-5Y LIC-POS-REG-10Y

X = 1, 3, 5, or 10 years

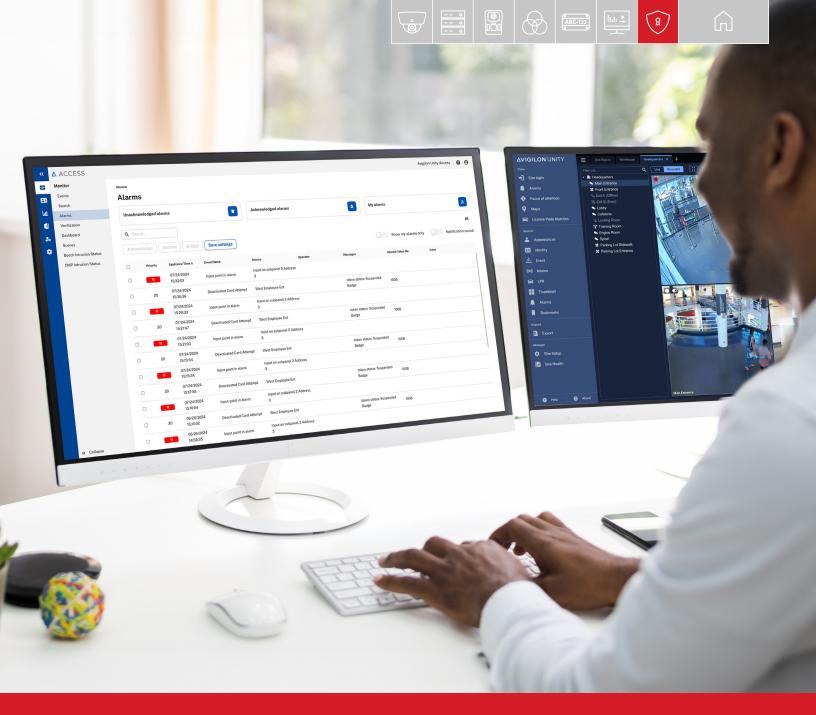



# Unity Access Control

Avigilon Unity Access is an on-premise access control system for enterprise-class installations. Designed to be quickly deployed and easy to use, Unity Access provides operators with an intuitive turnkey solution so they can focus on protecting people, properties and assets.















# Avigilon Unity Access Solutions

Unity Access simplifies enterprise-level access control management with a user-friendly, web-based access control system. It is built on an open architecture and supports open-platform hardware, which gives you the flexibility to connect with third-party integrations for flexible and tailored solutions. Streamline operations, improve security and empower your organization with Unity Access.



### Details

	Browser-based interface	Browser-based, requiring no software installation.
	Turnkey operation	Easy installation experience with server appliances that are ready to go the moment you plug them in.
	Scalable deployment model	Unity Access appliances allow you to start with what you need on individual appliances, then expand by adding doors and replicating additional appliances as your organization grows.
	Intuitive user interface (UI)	The UI enables optimized navigation and search capabilities, so users can quickly and easily find what they are looking for and focus on security data.
	Dynamic Scenes	Manage security objects through customized scenes or representations of your facilities, including floorplans, dashboards and quick actions. Real-time insights, dynamic icons and integration with Unity Video enhance situational awareness and streamline alert response.
Easy to use	Mobile app	The Unity Access mobile app provides quick and easy access to view any door status remotely, activate a sitewide lockdown or any global action, deactivate an identity and more – anytime, anywhere.
& deploy	System configuration templates	Wide selection of easy-to-use templates for doors, wiring and input and output to enable quick Batch Add setup for faster configuration.
	Customized reporting	Pre-defined, ready-made reports that can be customized to display important access control data.
	Peer-to-peer replication	Patented technology allows for replication of identity data on multiple appliances across many sites. No additional software or hardware is required, which simplifies identity management, promotes consistency of identity data and reduces data entry efforts.
	Identity and alarm management	Streamline identity and alarm management with real-time insights, efficient identity search, import/export and badge design capabilities. An intuitive alarm management system with visual indicators, video integration and customizable workflows enables efficient incident response.
	Multi-language support	Unity Access supports Arabic, German, English (U.K. and U.S.), Spanish, French, Hebrew, Italian, Polish, Portuguese (Brazil), Russian and Chinese
	Controllers & sub-panels	Protect and future-proof your access control investment by using open non-proprietary, authentic Mercury Security hardware with support for large encoded card formats and Mercury panel certificates for added security.
	Intrusion detection	Integration to intrusion detection systems to automate the management and control within the Unity Access system.
Open-field	Wireless locks	Integration with a wide variety of leading third-party wireless lock vendors.
hardware	Biometric readers	Integration to biometric fingerprint reader technology.
support & integrations	pivCLASS	Integration with HID® pivCLASS® technology when implemented in an HSPD-12 environment requiring FIPS 201-2 evaluation program approval.
Video security  Unification with Unity Video and integration with other third-party video responses with video context.		Unification with Unity Video and integration with other third-party video management software to better inform responses with video context.
	Integration support Experience unified, scalable security with limitless support for integration across a growing from leading technology providers. The Avigilon Developer Community provides support for	

### Key features



Browser-based and Linux-based, turnkey security solution



Integrate via RESTful API



statuses in real-time from an interactive map



Assign and manage role-based identities and streamline alarm management



Leverage the open-platform hardware support and integrate with leading thirdparty wireless lock vendors



Perform daily operations swiftly and respond to critical events at any time with the mobile app



Unify with video management software for end-to-end security




Connect your entire physical security ecosystem and automate workflows

earn more





















# **Unity Access Licensing**

Invest in lifetime ownership and long-term value with Unity Access' flexible service plan, offering scalable solutions for your changing access control needs. Get regular updates, ongoing support, and the latest features and updates to help keep your people, properties and places safer. Find the pricing plan that best fits your organizational needs.

LIFETIME LICENSES Get lifetime ownership for you system, fea	atures and doors		SUBSCRIPTION Yearly - 1/3/5
Appliance <sup>1</sup>	Software	Doors	Service plan
Choose an appliance that works best for your system's size requirements.	Get the base license and choose from a selection of optional add-ons and other licenses.	Select the pack of doors that best suits your organization's needs. Your first 20 doors are included with the base license.	Unlock seamless access to the latest features, updates and ongoing support.
Virtual	Base license <sup>1</sup>	1-door pack UA-SW-LIC-1DOORS	Up to 250 doors
Professional	Individual add-ons	10-doors pack UA-SW-LIC-10DOORS	Up to 1,000 doors
Enterprise	All add-ons	100-doors pack UA-SW-LIC-100DOORS	Up to 2,000 doors
Enterprise Plus		1,000-doors pack UA-SW-LIC-1000DOORS	Up to 4,000 doors

<sup>&</sup>lt;sup>1</sup> Required selections

		BASE LICENSE Max. number of objects	ADD-ON <sup>2</sup> Max. number of objects	MSRP
	Standard Collaborations	2	1,000	
Data & templates	Identity profiles	5	1,000	€2,175
	Badging templates	2	1,000	
	Partition	5	1,000	
Availability / network	Replication	1	100	€1,740
	Auto-failover	✓	✓	
	Scenes	20	1,000	
Situational awareness	Areas	10	1,000	£1.740
Situational awareness	Virtual stations	5	1,000	€1,740
	Global actions	50	1,000	
	REST	✓	✓	
luta avati ava	3rd-party video integration	-	✓	C1 740
Integrations	Biometric enrolment	-	✓	€1,740
	Intrusion panels	-	50	
All-in add-ons				<b>€5,220</b> Best value

 $<sup>{}^2\</sup>text{Actual limits will depend on the hardware environment. Please reach out to your sales representative or \underline{contact \, us} for recommendations.$ 















# Unity Access System

Designed to help you focus on securing your people, property and assets, while giving you the flexibility to respond to alerts wherever you are.

Specifications	ë ■			OTRAK
EDITION	PROFESSIONAL	ENTERPRISE	ENTERPRISE ENTERPRISE PLUS VII UA-SW VIRTUA UA-SW	
Part Number	UA-APP-PRO-7	UA-APP-ENT-7	UA-APP-ENT-PLUS-7	VIRTUAL-HYPERV
	Ideal for small systems	Ideal for medium systems	dium systems Ideal for large systems Ideal for privat	
	MSRP from €1,618	MSRP from €3,706	MSRP from €8,874 MSRP from €	
Appliance Type	Small form factor, desktop	1U rack mo	mount chassis VMware vSphere® ESX or Microsoft Hype	
Max. Number of Doors	Up to 50	Up to 400	Up to 4,000 <sup>2</sup> Up to 4,000+	
Max. Simultaneous Operators	10	20	50	
Max. Identities	75,000	250,000	500	,000
Max. Stored Transactions	75,000,000		150,000,000	
Storage	500 GB (7.2K RPM SATA)	1 TB (7.2K RPM SATA 6 Gbps)	1.3 TB (4 x 480 GB SSD RAID5)	1 TB SSD <sup>1</sup>
Processor	3.7 GHz Intel Pentium® 5400 (4 MB cache, 2C/4T, 65 W)	Intel Xeon E-2124 3.3GHz, 8M cache, 4C/4T, turbo (71W)		
Memory	4 GB (1 x 4 GB) (2.6 GHz DDR4 Non-ECC)	8GB 2666MT/s DDR4 ECC UDIMM		
Network Interface	1 Gigabit Ethernet Intel	1 Gigabit Etherne	et Broadcom 5720	1 Gigabit Ethernet <sup>1</sup>

Learn more

**RAID & Hot-Swap Components** 





No

Yes1

<sup>&</sup>lt;sup>1</sup> System recommendations.

 $<sup>^{\</sup>rm 2}$  Actual limits will depend on the hardware environment. Please reach out to your Sales Representative for recommendations.















# Controllers & sub-panels

Avigilon is a Platinum Elite Mercury Security Partner. With Mercury hardware options for small to enterprise level systems, deploying and managing your Unity Access system has never been more intuitive and flexible as it is today.







Enhanced data security with

embedded crypto memory chip



environment

### **Details**

MODEL NAME	CONTROLLERS	INTERFACE MODULES	I/O MODULES
Part Number	AC-MER-CONT-MP1501 AC-MER-CONT-MP1502 AC-MER-CONT-MP2500 AC-MER-CONT-MP4502 Support for legacy EP and LP Mercury controllers	AC-MER-CON-MR52 AC-MER-CON-MR50 AC-MER-RIM-MR62E	AC-MER-CON-MR16IN AC-MER-CON-MR16OUT
Features	Manage anywhere from 17 to 64 readers	Low-cost and high-performance for all I/O needs	Monitor high concentrations of inputs and outputs with the Unity Access system
	Enhanced data security with embedded crypto memory chip	Manage multiple controlled openings with auxiliary point control and monitoring	Compact footprint and RS-485 connectivity
	Latest cybersecurity		
	Performance and memory improvements	Provide access control and security monitoring using any of the Mercury controllers connected to the Unity Access system	Capable of supporting 16 general- purpose dry-contact inputs or outputs Supports being clustered or
	Next generation firmware with	. is a soul of ottern	distributed to suit the installation

Learn more



Mercury 0S 2.x

Backwards compatibility with Unity Access via legacy mode

















The Unity Access system offers trusted and secure door readers and multipurpose credential options to keep security at the forefront of your facility.















### Details

MODEL NAME

**Features** 

C-VT-READ-BIO-RFID-AC5000SC-BLK-NA VT-READ-BIO-RFID-AC2000SC-NA VT-READ-BIO-RFID-AC2000IC-NA

AVIGILON SE CREDENTIALS

AC-HID-CARD-ICLASS-SE-3000-AVG

AVIGILON SIGNO CARD READERS

AC-HID-READER-SIGNO-40KTKS-01-000000-AVG

AVIGILON SEOS CREDENTIALS

#### MSRP from €1,109

Detect fingerprints quickly and accurately and discern fake biometric attempts for high security environments

Easily set up and manage biometric identities directly from the Unity Access system

Get real-time visibility into current risk position and reduce unauthorized access MSRP from €6

Purposefully designed for the Unity Access system

Advanced 56-bit format provides multiple levels of security

MSRP from €559

Highly versatile with support for the widest range of credential technologies, including HID Mobile Access

Ultra secure storage of cryptographic keys on certified secure element hardware

Includes out-of-the-box support for Open Supervised Device Protocol (OSDP) for secure bidirectional communication

MSRP from €7

Leverages advanced Seos credential technology by HID Global, allowing seamless migration to a higher standard of security and functionality

Advanced 56-bit format provides multiple levels of security

Available in logo card, non logo card or FOB





1 We support -00/01/02/03

For a full list of part numbers, contact your local sales representative.















The Unity Access system offers trusted and secure door readers and multipurpose credential options to keep security at the forefront of your facility.















### Details

MODEL NAME	FARPOINTE DATA CONEKT READERS AND CREDENTIALS	FARPOINTE DATA DELTA READERS	FARPOINTE DATA RANGER READERS	FARPOINTE DATA GUARDIAN READERS	FARPOINTE DATA GIBRALTAR READERS	FARPOINTE DATA PYRAMID READERS
Part Number	AC-FP-READ-CSR- 35L-OSDP AC-FP-READ-CSR- 35L-WG	AC-FP-READ-DELTA3-CSN AC-FP-READ-DELTA3-SECTOR AC-FP-READ-DELTA5-CSN AC-FP-READ-DELTA5-SECTOR AC-FP-READ-DELTA5-3-CSN AC-FP-READ-DELTA5-3-ECTOR AC-FP-READ-DELTA5-3-ECTOR AC-FP-READ-DELTA6-4-CSN AC-FP-READ-DELTA6-4-CSN	AC-FP-REC-LONG- RANGE-WRR-22 AC-FP-REC-WRR-44	AC-FP-READ- GUARDIAN-VR-P- 403-HA AC-FP-READ- GUARDIAN-VR-P- 405-HA AC-FP-READ- GUARDIAN-VR-P- 410-HA	AC-FP-READ- GIBRALTER-BR-P- 455-HA AC-FP-READ- GIBRALTER-BR-P- 453-HA	AC-FP-READ-P-300-H AC-FP-READ-P-500-H AC-FP-READ-P-500-H AC-FP-READ-P-500-H AC-FP-READ-PROX-EURO-P-530-HA AC-FP-READ-PROX-KEYPAD-P-620-HA AC-FP-READ-P-640-H AC-FP-READ-P-640-H AC-FP-READ-P-710-H AC-FP-READ-P-710-H AC-FP-READ-P-900-H AC-FP-READ-P-900-H AC-FP-READ-P-900-H

Features

Enables smartphones to be the access credential with a secure smartphone wallet app

MSRP from €400

Readers read Conekt BLE mobile credentials as well as traditional physical credentials

Supports industry standard and custom formats

### MSRP from €470

Enhanced smartcard encryption and optional DESFire EV1 and EV2 support

Supports industry standard interfaces

Based upon the world-standard MIFARE technology, ideal for ISO14443 applications

Installs indoors or outdoors

### MSRP from €345

**Exceptionally long** read range-up to 200 ft (61 m)

Ideal for parking facilities, gated communities marinas and more

Supports industry standard electronic access control interfaces

#### MSRP from €626

Vandal-resistant with thick polycarbonate material, epoxy potted electronics and tamper proof screws

Suited for schools, inner-city environments, correctional facilities, or where heavy machinery is operated

### MSRP from €680

Vandal-resistant with stainless steel built and reinforced with a bullet-resistant Shot Blocker insert and tamper proof screws

Suited for schools, correctional facilities, housing authorities, and where heavy equipment is operated

### MSRP from €677

Outstanding read range and excellent read speed

Mounts to most surfaces, including metal

Installs indoors or outdoors

Supports industry standard interfaces

For full list of part numbers including credentials, contact your local sales representative.



















The Unity Access system offers trusted and secure door readers and multipurpose credential cards to keep security at the forefront of your facility.















### Details

Part Number (readers)

**Features** 

CHLAGE MOBILE ENABLED MULTI-TECHNOLOGY READERS MODEL NAME

SCHLAGE MULTI-TECHNOLOGY READERS

AC-ING-READ-APTIQ-MULL-MT11 ALL-READ-APTIQ-P-SNG-MT15-485

AC-ING-READ-APTIQ-KEYPD-MTK15
-ALL-READ-APTIQ-OSDP-KEYPD-MTK15-485 AC-ALL-READ-APTIQ-WIEGAND-MTMSK15

SCHLAGE SMART CARD READERS

AC-ING-READ-CEEDID-PROX

#### MSRP from €546

Eases the transition from existing proximity systems to secure encrypted card technologies or mobile solutions

Supports Schlage Mobile Access Credentials (BLE) and Near Field Communication (NFC)

Offers support for Apple's Enhanced Contactless Polling (ECP) for Apple Wallet and Google Pay credentials

#### MSRP from €847

Recognizes magnetic stripe, proximity, Schlage smart card and NFC-enabled smart devices

Works with industry standards and common access control system interfaces

Sleek, compact and cost-effective for high-security applications

> Mini-mullion design is ideal for installation in tight spaces

MSRP from €175

Meets applicable ISO standards to integrate with many access control systems

Mutually authenticated in communication between the card and reader for optimum security

### MSRP from €175

Sleek, compact and cost-effective for applications requiring lower security

Mini-mullion design is ideal for installation in tight spaces

Recognizes most industry leading 125 kHz proximity credentials

Easily integrates into existing legacy proximity systems and are compatible with new installations

### MSRP from €2,175

Quickly extend a facility's access control to remote locations

Battery-operated device that can be handheld or placed in a temporary location for credential verification

LED indicator visually confirms credential verification or rejection

Utilizes the same credential reader modules offered with an AD Series lock

### MSRP from €686

Simplifies enrollment of smart and multi-technology

credentials in "No-Tour" multifamily applications

Program encrypted credentials, such as a keyfob, over Wi-Fi or USB connection to PC

When presented at a lock by the user, the pre-programmed credentials automatically update the lock database

For full list of part numbers including credentials, contact your local sales representative.



















The Unity Access system offers trusted and secure door readers and multipurpose credential cards to keep security at the forefront of your facility.

# **OSTid** Details STId SWEDGE NROLLMENT KIT:

Pa	rt Number	AC-STID-READER- ARC1S-W33-B/BT1- 70S/1A  AC-STID-READER- ARC1S-R31-B/BT1- 3i/1A  AC-STID-READER- ARCS-W33-A/BT1- 70S/1A  AC-STID-READER- ARCS-W33-B/BT1- 70S/1A  AC-STID-READER- ARCS-W33-C/BT1- 70S/1A  AC-STID-READER- ARCS-W33-AQ/BT1- 70S/1A  AC-STID-READER- ARCS-W33-B/BT1- 70S/1A	North America: AC-STID-ENROLL- READER-USB-ARCS- R35-H/BT1-5AQ/1A Europe: AC-STID-ENROLL- READER-USB-ARCS- R35-H/BT1-5AB/1A	US UPPER-BAND: AC- STID-READER-SNA- W53-A/BT4-70S/1 EUROPE LOW-BAND: AC-STID-READER- SNA-W43-A/BT4- 70S/1	North America: AC-STID-ENROLL- READER-UHF- SWEDGE-W55  Europe: AC-STID-ENROLL- READER-UHF- SWEDGE-W45	ARCHITECT® BLUE PROGRAMMER: AC-STID-ARCHITECT- PROGRAMMING-KIT- SECARD-BT  SPECTRO NANO PROGRAMMER: AC-STID-SPECTRE- PROGRAMMING-KIT- ULTRYSV2	AC-STID-CARD- NONPROGRAMED- CCTW670  AC-STID-KEYFOB- NONPROGRAMED- PCGW671  AC-STID-TAG-UHF- WINDSHIELD-ETA- W75B-574BE10
----	-----------	--	---	---	---	--	---

	/US/ IA					
	MSRP from €276	MSRP from €485	MSRP from €1,971	MSRP from €870	MSRP from €867	MSRP from €10
Features	Wide range of sizes and features: mullion or standard readers, capacitive keypad or touchscreen readers, and more  Various mobile identification modes available  Secure readers with RFID and Bluetooth® technologies	Designed for all short- range contactless encoding, enrollment and identification applications	Compact UHF and Bluetooth® reader Secures and eliminates vehicle access lines	Easy enrollment of all UHF identifiers by keyboard emulation Includes desktop reader and SWEDGE software	Software kits to configure non programmed readers	Designed for all access control and high security identification applications  Several chip technologies available to meet all access control needs





For full list of part numbers including credentials and MSI-programmed versions, contact your local sales representative.















# **Power Supplies**

Avigilon's high-efficiency, cost-effective power supplies from LifeSafety Power and Elmdene provide all the power needed for up to 16-door applications.









### Details

Model Name	LIFESAFETY POWER	ELMDENE <sup>1</sup>
Part Number	AC-LSP-XDR-MER AC-LSP-XDR-MER-LCK All Mercury and SALTO LSP enclosures available (including ProWire and rack mounted) Contact your local Sales Representative for more information	AC-ELM-1DR AC-ELM-2DR AC-ELM-4DR AC-ELM-4/12DR-EXP AC-ELM-12DR AC-ELM-4/12DR-EXP-LCK AC-ELM-ACCESS-EXP-PLATE
Max. Number of Doors Supported	2DR: 2 4DR: 4 8DR: 8 16DR: 16	1DR: 1 2DR: 2 4DR: 4 12DR: 12

Features Designed to house Mercury Security controllers

Separate 24 VDC circuit provides lock power within the same enclosure, saving the cost of added hardware and installation time

24DR: 24

Designed to house Mercury Security controllers

13.8 VDC 4A output supplies continuous full rated current to load

Additional 0.5A to charge standby battery

Modular construction for ease of maintenance and installation

Learn more





 $<sup>^{\</sup>rm 1}$  Listed products from Elmdene are only available in the European Union and the United Kingdom.















# Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.



### **VON DUPRIN**









### Details

MODEL NAME

Part Number

SCH-AD400-CUSTOM SCH-AD300-CUSTOM (Wired) AC-SCH-993-CUSTOM (Crashbar)

SCHLAGE AD SERIES LOCKS

AC-ALL-SCH-PIM400-485-RSI

CHLAGE LE/B & NDE/B LOCKS

AC-SCH-RU-VOND-3-47258681

#### MSRP from €2.175

### **Features**

Upgrade to new technologies without taking locks off the door

Cylindrical, mortise, mortise deadbolt and exit trim chassis options

Built-in credential reader and access control sensors for simplified installation

FIPS 201-2 compliant

#### MSRP from €870

Standard IP addressable intelligent controller for up to 16 AD Series wireless devices

Manage up to 240,000 cardholders and 50,000 transactions in memory

PoE compliant to IEEE 802.3af

#### MSRP from €957

Affordably extend electronic access control deeper into your facility

Packaged with credential reader and access control sensors for simplified installation

LE mortise locks can be ordered with LED indicator, interior push button (IPB) or deadbolt for tailored applications

NDEB cylindrical locks can be ordered with IPB to extend the lock to include storeroom, office, privacy and apartment applications

#### MSRP from €783

Provide greater perimeter security for K-12 schools

Enable remote undogging and door status monitoring

Modular kit retrofits existing 98/99 and 33A/35A series devices

#### Communications supported

AD400: Mercury to PIM then 900 MHZ to lock

AD300: Mercury via RS-485 to lock

AD400: uses PIM400-458 and PIM400-1501-LC or PIM400-TD2 via wiegand

> AD300 used RS-485 or PIB300-2D

NDEB and LEB: Wifi direct to **Unity Access** 

Mercury to Gateway then wireless Bluetooth NDEB or LEB

RU/RM: via Gateway direct via POE to Unity Access





Not all wireless locks products are available in all regions, please contact your local sales representative to confirm availability.















# Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.















### Details

MODEL NAME	SALTO SPACE VIRTUAL NETWORK (SVN) DATA-ON- CARD SYSTEM	SALTO CONTROLLERS	XS4 ORIGINAL	XS4 MINI ANSI	XS4 LOCKER LOCK	NEOXX PADLOCK G4 AND G3
Part Number			Contact your <u>local s</u>	sales representative		
	MSRP from €1,531	MSRP from €1,305	MSRP from €1,218	MSRP from €870	MSRP from €435	MSRP from €522
Features	Streamline access management for high door density facilities with access data on the card  Update cards quickly with RFID technology  Locks can securely read, receive and write information to ensure access rights are updated  Issue SALTO JustIn Mobile credentials from Unity Access to manage access rights over-the-air  Real time communication via mobile credential where mobile device is controller	Online networked door controller  Connection for two readers on board  Two reader downstream panels via RS-485 connection for up to 10 doors off a controller  4 relay outputs  6 inputs	Unique, simple to install and retrofit, and featuring a sleek design  BLUEnet Wireless cutting-edge real-time technology and newlydeveloped and powerful SVN-Flex capability engine  Compatible with Salto Space dataon-card, Salto KS Keys as a Service cloud-based access solution, and Salto's Justin Mobile technology for digital keys  Includes RFID NXP MIFARE®, Bluetooth LE, and NFC technology functionality	Designed to meet ANSI A156.2 Grade 1 or 2 cylindrical latch requirements High security via high resistance, hardened anti-drill protection Includes RFID, Bluetooth LE, and NFC technology functionality	XS4 Locker lock is perfect for controller access to lockers, cabinets, cupboards, boxes and show cases  Offline or online capability  Outer thumbturn with red/green indicator for availability of the locker  Comes with BioCote antimicrobial technoligy  Compatibility with cards, fobs or mobile credentials for real time audi	Neoxx padlocks are the ultimate smart locking solution  Built to withstand all access needs, the Salto Neoxx Padlock series offers a unique solution ideal for utility and critical infrastructure security – electric power stations, telecom network services, industry applications  Property services that need an additional level of security to control specific doors like gates or storages, without losing convenience or control.  As portable as conventional padlocks, the Neoxx Padlock's security is enhanced by removing any lock's most vulnerable part

For a full list of part numbers, contact your <u>local sales representative</u>.



















## Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.

#### **ASSA ABLOY** Details ASSA ABLOY APERIO LOCKS ASSA ABLOY POWER OVER ETHERNET (POE) LOCKS MODEL NAME **Features** Deploy in a wide range of applications Suited for hard-to-wire locations Enable easy and cost-effective installaincluding offices, server cabinets, tions into existing infrastructure storage lockers, drawers, glass doors Reduce installation time and costs by and more utilizing existing Wi-Fi Set up real-time communication by utilizing IEEE 802.3af PoE-enabled Flawless integration with Mercury network infrastructure Easy transition to higher security controllers to provide real-time access credentials such as HID Mobile and and audit Support multiple credential types such government-issued PIV with HID Global multiCLASS SE technology as HID Mobile, for a secure solution Support the use of HID Mobile credenwith multiCLASS SE technology tials to access doors using a mobile device Privacy button allow shelter in place/ local lockdown Communication WiFi locks communicate via Wi-Fi on POE locks communicate via POE Aperio locks run on a wireless 2.4 GHz frequency back to hubs 2.5 Ghz frequency network connection WiFi locks connect to Assa DSR [Door Connection via Mercury to AH30 Gen 5 POE locks connect to Assa DSR [Door RS-485 hub, or to AH40 Gen 5 POE Hub Service Router] which communicates Service Router] which communicates or via AH20 wiegand 1 to 1 hub via network to Unity Access via network to Unity Access





Available in the United States and Canada only.















### Federal Government Solutions

Currently supported in Unity Access (formerly ACM) 6. Unity Access 7 certification coming soon.

The Unity Access system is FIPS 201-2 compliant and is a certified solution on the GSA Approved Product List, meeting the Personal Identity Verification requirements mandated for U.S. federal employees and contractors. Customers can conveniently and reliably purchase all components of this fully compliant, GSA-approved FICAM solution directly from Avigilon.















### **Details**

MODEL NAME	UNITY ACCESS SOFTWARE	HID PIVCLASS SOFTWARE	CONTROLLERS & SUB-PANELS	HID PIVCLASS AUTHENTICATION MODULE (PAM)	HID PIVCLASS READERS
APL Approved Products	APL #10122	Validation System	APL #10122	Validation System	Embedded Configuration
	Avigilon PACS software Unity	APL# 10123 Avigilon PACS software Unity pivCLASS	HID LP4502	APL# 10123 pivCLASS	pivCLASS RP40 Contactless Reader VAS0300 Rev. B.1 (APL# 10003)
	Access (ACM) 6.50.6 or below	Registration Engine for Unity Access	System Controller with pivCLASS Embedded	Authentication Module	pivCLASS RK40 Contactless Reader VAS0300 Rev. B.1 (APL# 10004)
		pivCLASS Certificate Manager, Release 5.12.0	Authentication (Software 1.29.1, Firmware 5.11.38)		pivCLASS RPK40 Contact/ Contactless Reader VAS0300 Rev. B.1 (APL# 10005)
		pivCLASS Reader Services, Release	HID LP2500 Intelligent Controller		pivCLASS R40 Contactless Reader VAS0300 Rev. B.1 (APL# 10006)
		5.12.0 pivCLASS	(Firmware1.29.1)  HID LP1502		pivCLASS RKCL40 Contact/ Contactless Reader VAS0300 Rev. B.1 (APL# 10007)
		IDPublisher, Release 5.12.0	Intelligent Controller (Firmware 1.29.1) HID MR52-S3 Two		pivCLASS RPKCL40 Contact/ Contactless Reader with PIN VAS0300 Rev. B.1 (APL#10008)
			Reader Interface Module (Firmware		Authentication Module Configuration
			3.21.0)		pivCLASS RP40 Contactless Reader (APL#10003)
			HID MR62e Reader Interface Module (Firmware 3.21.x)		pivCLASS RK40 Contactless Reader + PIN (APL# 10004)
					pivCLASS RPK40 Contactless Reader + PIN (APL# 10005)
					pivCLASS R40 Contactless Reader (APL# 10006)
					pivCLASS RKCL40 Contact/ Contactless Reader with PIN (APL# 10007)
					pivCLASS RPKCL40 Contact/ Contactless Reader with PIN (APL# 10008)
					pivCLASS RPKCLB40 Contact/ Contactless Reader with PIN & BIO (APL# 10026)
					pivCLASS RKCLB40 Contact/ Contactless Reader with PIN & BIO (APL# 10052)
					pivCLASS R10 Contactless Reader (APL# 10085)



















### **Biometric Solutions**

The integration of Unity Access with ViRDI's biometric fingerprint reader technology provides further safeguards to high security environments with an extra form of identification.







### Details

MODEL NAME	VIRDI ENROLLMENT USB FINGERPRINT READER	VIRDI IP65 FINGERPRINT SMARTCARD READER WITH KEYPAD	VIRDI IP65 FINGERPRINT SMARTCARD READER
Part Number	AC-VT-READ-BIO-USB-FOH02-SC	AC-VT-READ-BIO-RFID-AC5000SC-BLK-NA	AC-VT-READ-BIO-RFID-AC2000SC-NA
	MSRP from €164	MSRP from €931	MSRP from €621
Features	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities
	Easily set up and manage biometric identities directly from Unity Access	IP65 rating for dust and water resistance	Secure and convenient access with Bluetooth and VIRDI's UNIS B plus mobile application
	Authenticate individual using one-to-one biometric verification	OSDP compatible with Unity Access controllers integration	IP65 rating for dust and water resistance
		Simplify operation with graphic UI and customizable 2.8" Color TFT LCD background	OSSP compatible with Unity Access controllers integration

Learn more



















# Visitor Management

Unity Access integrates with HID Global's EasyLobby Secure Visitor Management software, which allows organizations to automate the entire process of registering a visitor, printing a badge and capturing detailed information in seconds by simply scanning an ID.









### **Details**

MODEL NAME	UNITY ACCESS INTEGRATION WITH HID GLOBAL EASYLOBBY SOFTWARE	HID GLOBAL SNAPSHELL LICENSE CARD SCANNER	ASSURETEC ID-150 CARD SCANNER	DYMO 550
Part Number	AC-HID-EL-96000-SVM10	AC-HID-EL-SS-R2	AC-HID-EL-AST-ID150	AC-HID-EL-DYMO-550
	MSRP from €3,915	MSRP from €2,610	MSRP from €3,654	MSRP from €361
Features	EasyLobby visitor records are automatically updated to Unity Access with identity information  Streamlines enrollment with pre-registration or self-registration options  Improves security by identifying who is in a facility quickly and accurately, especially in emergency situations  Conduct analysis and reporting on visitor data, quickly and easily	Leverages Optical Character Recognition (OCR) to read driver's licenses and ID cards quickly and accurately Easy-to-use with no moving parts and compact design takes up minimal counter space	Reads and verifies identity documents such as driver's licenses and IDs quickly and accurately, including the photo	Prints temporary badges for increased security and visibility of visitors  Eliminates the cost of ink or toner with direct thermal printing technology



















# Intrusion Panels Integration

Centrally monitor and control intrusion objects and access events from the Unity Access system for visual verification of alerts and faster responses. Operators can manually arm or disarm areas and leverage Unity Access capabilities to automate the intrusion system with access control events.





### Details

Part Number

Part of the All-In Add-on or Integrations Add-on UA-SW-LIC-INTEGRATIONS-ADDON UA-SW-LIC-ALL-IN-ADDON

DMP INTRUSION INTEGRATION

Part of the All-In Add-on or Integrations Add-on UA-SW-LIC-INTEGRATIONS-ADDON UA-SW-LIC-ALL-IN-ADDON

**Supported Panels** 

Mid-range: B3512, B4512, B5512, B6512 Commercial: B8512G, B9512G, D9412GV4 V2, D7412GV4

XR150, XR550

Features

Workflow automation

Increased situational awareness and faster response

Quicker verification of intrusion events via live video triggers

Increased Security And Convenience With Intrusion Area Control

Available from anywhere and at any time from mobile devices

No additional access hardware or wiring required - connects to IP networks









# Alta Access Control

The Motorola Solutions Avigilon Alta cloud-native access control system is fast, flexible and future-proof. Enhance security and improve awareness seamlessly with intuitive software, modern readers, and user-friendly mobile credentials. Choose from a range of options designed to secure anything from a single door up to a global enterprise.
















# Avigilon Alta Access

### MSRP from €228

The cloud-native Avigilon Alta Access from Motorola Solutions is an intuitive access control system, designed to make managing security for any number of users, sites and devices easier. Available in Basic, Premium, and Enterprise levels, and equipped with robust security features on a fully remote, cloud-based management platform.

### Specifications

EDITION	BASIC	PREMIUM	ENTERPRISE
Part Number	SW-BSC-P1 SW-BSC-P5 SW-BSC-P10 SW-BSC-P25 SW-BSC-P100 SW-BSC-P1000	SW-PRM-P1 SW-PRM-P5 SW-PRM-P10 SW-PRM-P25 SW-PRM-P100 SW-PRM-P1000	SW-ETP-P1 SW-ETP-P5 SW-ETP-P10 SW-ETP-P25 SW-ETP-P100 SW-ETP-P1000
API, Webhooks, Mobile SDK	✓	✓	✓
ifetime warranty	✓	✓	✓
Alerts	✓	✓	✓
Reports	✓	✓	✓
ockdown¹	Standard	Flexible	Flexible
Occupancy management		✓	✓
Enhanced role management		✓	✓
Rules Engine	Basic	Advanced	Advanced
Custom user fields		✓	✓
VMS Integrations with Milestone and Cisco meraki	A la carte	✓	✓
Custom badge printing	A la carte	✓	✓
Muster Reports		✓	✓
Alarm Management		✓	✓
Custom dashboards		✓	✓
Static Cloud IP			✓
Support SLA			✓
Live Support	Mon - Fri	7 days/week	24/7 priority
API/Webhook consultation	Integration only	1 hour/month	Unlimited

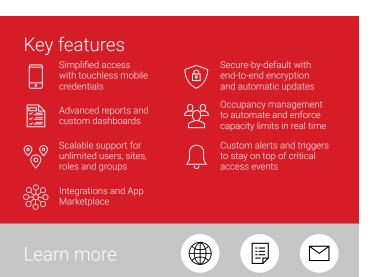

<sup>1</sup> Flexible Lockdown is included at no additional charge for all 501(c)3 organizations.















# Avigilon Smart Reader

### MSRP from €261

Sleek proximity reader that features best-in-class door access. Compatible with mobile devices, cards, fobs, NFC, WiFi and Bluetooth®.

# Specifications



MODEL NAME	AVIGILON STANDARD SMART READER V2	AVIGILON MULLION SMART READER V2				
Part Number	OP-R2X-STND	OP-R2X-MULL				
	Openpath DES	Fire EV3				
	MIFARE Classic/DESFire/Ultra	alight (ISO14443A) CSN				
Card compatibility	Openpath Pro	oximity				
	HID proxin	mity				
	LenelPro	ox				
	Encrypted communications betwe	en mobile app and controller				
Security	Fully encrypted communication between	Fully encrypted communication between Openpath key cards and reader				
security	Eliminate thread of copying or cloning Openpath key cards					
	Includes tamper resistant secure storage					
	Reader works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app					
System Compatibility	Reader works with legacy access control systems via Mobile Gateway option					
	Support for Apple Enhanced Contactless Protocol (ECP)					
Cloud Management	Yes					
Form	Standard	Mullion				
Frequency	125 kHz, 13.5	56 MHz				
Openpath Bluetooth	Yes					
Auto proximity unlock	Yes					
Standards	ISO 14443A	ISO 14443A, Prox				
Certification	CE, FCC, UL 29	CE, FCC, UL 294, UKCA				
Environmental	IP65					
Dimensions	With back cover, no gang box: 7.4 x 12.0 x 2.3 cm With back cover, on gang box: 7.4 x 12.0 x 1.1 cm	4.3 x 11.9 x 2.2 cm				

### Key features Modern design seamlessly blends into or upgrades the aesthetics of any entry Supports auxiliary Wiegand readers connected through the Functions seamlessly with Works with Smart the mobile app, available on iOS and Android mobile app Lifetime warranty with user-level privileges $\bowtie$

Standard

Mullion

Standard

### Avigilon Standard Smart Reader Accessories

PRODUCT NAME	PART NUMBER
Standard Smart Reader Cover in white	OP-CVR-W















### Avigilon Smart Keypad Reader

MSRP from €437

Avigilon Smart Keypad Readers combine all the capabilities of the Avigilon Smart Readers while revolutionizing PIN code access and supporting multi-factor authentication. Designed for ease of use for both credentialed users and visitors, readers have a durable, capacitive touch keypad that prevents wear-and-tear and spoofing.

### Specifications





MODEL NAME	AVIGILON STANDARD SMART KEYPAD READER	AVIGILON MULLION SMART KEYPAD READER				
Part Number	OP-RKP-STND OP-RKP-MULL					
	Openpath DE	ESFire EV3				
	MIFARE Classic/DESFire/Uli	tralight (ISO14443A) CSN				
Card compatibility	Openpath F	Proximity				
	HID prox	ximity				
	LenelF	Prox				
	Encrypted communications betw	reen mobile app and controller				
	Fully encrypted communication between	een Openpath key cards and reader				
Security	Eliminate thread of copying or	cloning Openpath key cards				
	Includes tamper resis	Includes tamper resistant secure storage				
	Fully encrypted PIN transmission	Fully encrypted PIN transmission between reader and controller				
	Reader works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app					
System Compatibility	Reader works with legacy access control systems via Mobile Gateway option					
	Support for Apple Enhanced Contactless Protocol (ECP)					
Cloud Management	Yes					
Form	Standard	Mullion				
Frequency	Bluetooth LE (2402 -	2480MHZ): 2 dBm				
Openpath Bluetooth	Yes	S				
NFC	Yes	S				
Wave to Unlock/Touch	Yes	S				
Auto proximity unlock	Yes					
Standards		ISO 14443A, Prox				
Certification		FCC, CE, ISED/IC, UL294, IP65				
Environmental	IP6	5				
Dimensions	With standard brack, no back plate, on gang box: 11 x 12 x 1.2 cm	4.4 x 18.4 x 2.4 cm				
Installation Options	Flush mounted with US gang box, surface mounted on wall, surface mounted with EU gang box	Surface mounted on wall or door frame				

### Key features



Modern design seamlessly blends into or upgrades the aesthetics of any entry



Indoor/outdoor design



Supports auxiliary Wiegand readers connected through the Avigilon reader



the mobile app, available or iOS and Android



Works with Smart Watches



Supports remote unlockin with user-level privileges



Supports PIN functionality



Supports two-factor authentication (2FA) & multi factor authentication (MFA)

Learn more









Standard Mullion














R



### Avigilon Embedded MSRP from €261 USB smart reader

The Avigilon Embedded USB Smart Reader combines the functionality of a USB printer reader, desktop enrollment reader and embedded module into one device. The reader supports multiple touchless access methods, including Wave to Unlock, in-app and remote unlocks, and unlocking via a smart watch.

### Specifications

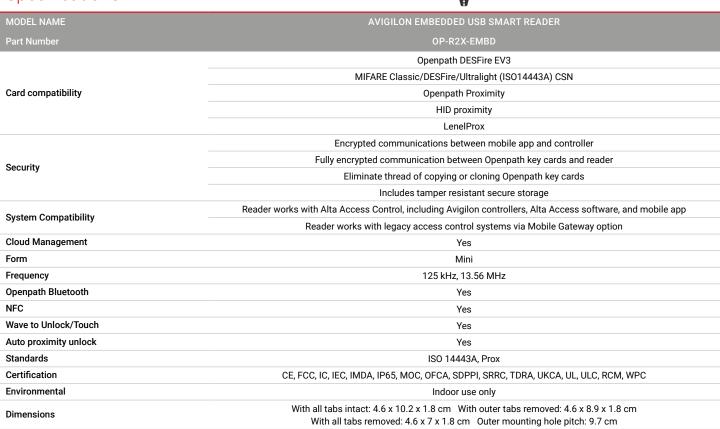

### Key features

Installation Options



support multiple
mounting applications



Small size fits in turnstiles, elevators, kiosks and other embedded applications



Functions seamlessly with the mobile app on Android and iOS



Supports remote unlocking with user-level privileges



reader and secured printing functionality



Supports auxiliary Wiegant readers connected through the Avigilon reader



Works with Smart Watches



Lifetime warranty

Learn more







### Avigilon Embedded USB Smart Reader Accessories

Single gang box, embedded into a wall, inside turnstiles and elevators, or used at a desk or printer

PRODUCT NAME	PART NUMBER
Desktop Bracket for Embedded USB Smart Reader	OP-RSC-DESK

















# Avigilon Video Reader Pro

### MSRP from €261

The Avigilon Video Reader Pro combines the heightened security of a built-in high-resolution camera with the form factor of a mullion door reader. Automatically associate video footage with access events, alerts and motion, and visually monitor entries in the mobile app and the Control Center.

### Specifications



MODEL NAME	AVIGILON VIDEO READER PRO		
Part Number	OP-VID-PRO-RDR		
	Openpath DESFire EV3		
Card compatibility	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN		
	Openpath Proximity		
	HID proximity		
	LenelProx		
	Encrypted communications between mobile app and controller		
Security	Fully encrypted communication between Openpath key cards and reader		
Security	Eliminate thread of copying or cloning Openpath key cards		
	Includes tamper resistant secure storage		
	Video Reader Pro works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app		
System Compatibility	Video Reader Pro works with legacy access control systems via Mobile Gateway option and Standalone Mode		
	Video Reader Pro works with third-party VMS software via open video standards		
Cloud Management	Yes		
Form	Mullion		
Frequency	125 kHz, 13.56 MHz		
Openpath Bluetooth	Yes		
NFC	Yes		
Wave to Unlock/Touch	Yes		
Auto proximity unlock	Yes		
Standards	ISO 14443A, Prox		
Certification	FCC, UL 294, CE		
Environmental	IP65		
	With Mullion bracket: 155 x 47 x 37 mm (6.1 x 1.85 x 1.45 in)		
Dimensions	With Standard bracket: 187 x 78 x 37 mm (7.36 x 3.07 x 1.45 in)		
Installation Options	Weight: 287 g (0.63 lbs)		
Installation Options	Surface mounted on wall, mounted on gang box, or installed inside metal enclosure		

### Key features



High resolution built-in camera records entry activity



Supports Triple Unioci technology



Indoor/outdoor design



NDAA complian

Adjustable camera angle for

legacy access control panel



5 year warranty









### Video

Image sensor	1 / 2.5" 5MP CMOS	
Resolution	5MP (2592 x 1944) recording at 25 fps	
Compression	H.264, MJPEG	
Bitrate	CBR, VBR, MBR	
Focal Length	2.8mm (F1.6)	
Field of View	Horizontal: 109°, Vertical: 81°, Diagonal: 136°	
Min. Illumination	Color: 2.5 lux, B/W: 0.0 lux (IR LED on)	
IR Range	9m (29.53ft)	
Wide Dynamic Range	HDR (87dB)	















MSRP from €950



# Avigilon Video Intercom Reader Pro

The Video Intercom Reader Pro combines all your front door security devices to provide live video, two-way audio, smart call routing and reliable touchless access.

### Specifications

opcomodition:		
MODEL NAME	AVIGILON VIDEO INTERCOM READER PRO	
Part Number	OP-VID-PRO-INT	
Card compatibility	Openpath DESFire EV3	
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN	
	Openpath Proximity	
	HID proximity	
	LenelProx	
	Encrypted communications between mobile app and controller	
Security	Fully encrypted communication between Openpath key cards and reader	
Security	Eliminate thread of copying or cloning Openpath key cards	
	Includes tamper resistant secure storage	
System Compatibility	Video Intercom Reader Pro works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app	
	Video Intercom Reader Pro works with legacy access control systems via Mobile Gateway option and Standalone Mode	
	Video Intercom Reader Pro works with third-party VMS software via open video standards, including ONVIF and RTSP	
Cloud Management	Yes	
Form	Mullion	
Frequency	125 kHz, 13.56 MHz	
Openpath Bluetooth	Yes	
NFC	Yes	
Wave to Unlock/Touch	Yes	
Auto proximity unlock	Yes	
Standards	ISO 14443A, Prox	
Certification	FCC, UL 294, CE	
Environmental	IP65	
Dimensions	With Mullion bracket: 204 x 47 x 37 mm (8.02 x 1.85 x 1.45 in) With Standard bracket: 235 x 78 x 37 mm (9.25 x 3.07 x 1.45 in) Weight: 384 g (0.85 lbs)	
Installation Options	Surface mounted on wall, mounted on gang box, or installed inside metal enclosure	

### Key features



High resolution built-in camera records entry



Initiate and accept calls from the Control Center or Openpath app



Can connect to third-party legacy access control panel



NDAA/TAA complian



Smart intercom interfact supports multiple configurations



Supports Triple Unlock technology



Indoor/outdoor design



Five year warranty

#### l earn more







### Video and audio

Image sensor	1 / 2.5" 5MP CMOS
Resolution	5MP (2592 x 1944) recording at 25 fps
Compression	H.264, MJPEG
Bitrate	CBR, VBR, MBR
Focal Length	2.8mm (F1.6)
Field of View	Horizontal: 109°, Vertical: 81°, Diagonal: 136°
Min. Illumination	Color: 2.5 lux, B/W: 0.0 lux (IR LED on)
IR Range	9m (29.53ft)
Wide Dynamic Range	HDR (87dB)
Audio Streaming	Two-way, full duplex with echo and noise cancellation
Audio Input/Output	Built-in microphone array, omni-directional; Built-in speaker
Audio Encoding	G.711u, G,711a, G.726













(8)



### Avigilon Core Series Smart Hubs

The Avigilon Core Series Smart Hub is a modular access control unit that supports Avigilon Smart Readers. The Core Series Smart Hub features the Access Control Core (OP-ACC), expansion boards, and uses RS-485 wiring to connect to the Smart Readers and is powered by a built-in power supply.

### Specifications







MSRP from €1,620

		And the second second	
MODEL NAME	12/24V 4-DOOR CORE SERIES SMART HUB	12/24V 8-DOOR CORE SERIES SMART HUB	24V ELEVATOR CORE SERIES SMART HUB
Part Number	SYS-4ENT-DVE1	SYS-8ENT-DVE2	20ENT-SYS-24V
Operate Voltage/Power	12-24VDC 1.25A @ 24VDC (with 4 Avigilon Readers) 0.7A @ 24VDC (with no readers)	12-24VDC 3.3A @ 12VDC (with 8 Avigilon Readers) 1.3A @ 12VDC (with no readers) 1.8A @ 24VDC (with 8 Avigilon Readers) 0.7 @ 24VDC (with no readers)	12-24VDC 12V: 825mA Max (with 2 Avigilon Readers) 12V: 325mA Max (with no readers) 24V: 470mA Max (with 2 Avigilon Readers) 24V: 190mA Max (with no reader
Door Relays	4 relays, 5A @ 24VDC (resistive)	8 relays, 5A @ 24VDC (resistive)	16 elevator relays, 1A @ 24VDC, 0.3A @ 110VAC
Auxiliary Relays	2 relays, 1A @ 24VDC	4 relays, 1A @ 24VDC	N/A
Avigilon Readers	Up to 4 Avigilon Readers	Up to 8 Avigilon Readers	Up to 2 Avigilon Readers
REX and Contact Sensors	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC 1kohm to each input
Auxiliary Inputs	4 input lines with EOL monitoring		N/A
Enclosure Size	14" H, 12" W, 4.5" D (356 x 305 x 114 mm)	20 x 16 x 4.5" (508 x 406 x 114 mm)	14" H, 12" W, 4.7" D (356 x 305 x 114 mm)
Weight	Approx 10 lbs (4.5 kg)	Approx 20 lbs (9 kg)	Approx 45 lbs (20.41 kg)
Operating Temperature	32° to 122°F (0° to 50°C)		
Operating Humidity	5% to 85% relative, non-condensing		
Communication Ports	10/100 baseT Ethernet, USB port		
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series		
Compliance	FCC, IC, CE, RCM, UL 294		

### Key features



Internet connectivity to the cloud for system management



locally in order to remain fully



Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6



for easy expansion and customization



Sensors, and Contact Sensors





EOL monitoring with single or







4-Door







Elevator

















MSRP from €2,874

# Avigilon Core Series Large Capacity Smart Hubs

The Avigilon Core Series Smart Hub is a modular access control unit that supports Avigilon Smart Readers. The Core Series Smart Hub features the Access Control Core (OP-ACC), expansion boards, and uses RS-485 wiring to connect to the Smart Readers and is powered by a built-in power supply. The Large Capacity Smart Hubs feature more room for wiring, and an aluminum backplate for easier installation.

### Specifications





MODEL NAME	12/24V 8-DOOR CORE SERIES LARGE CAPACITY SMART HUB	12/24V 16-DOOR CORE SERIES LARGE CAPACITY SMART HUB	
Part Number	SYS-8ENT-DVE4	SYS-8ENT-DVE6	
Operate Voltage/Power	12-24VDC 1.8A @ 24VDC (with 8 Avigilon Readers) .07 @ 24VDC (with no readers)	12-24VDC 3.6A @ 24VDC (with 16 Avigilon Readers) 1.4A @ 24VDC (with no readers)	
Door Relays	8 door relays, 5A @ 24VDC (resistive)	16 relays, 5A @ 24VDC (resistive)	
Auxiliary Relays	4 auxiliary relays, 1A @ 24VDC	8 relays, 1A @ 24VDC	
Avigilon Readers	Up to 8 Avigilon Readers	Up to 16 Avigilon Readers	
REX and Contact Sensors	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	16 REX and 16 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	
Auxiliary Inputs	4 input/output lines with EOL monitoring	8 input/output lines with EOL monitoring	
Enclosure Size	24" H x 20" W x 6.72" D (610 x 508 x 171 mm)	30" H x 23" W x 6.72" D (762mm x 584mm x 171 mm)	
Weight	Approx 25 lbs (11.33 kg)	Approx 45lbs (20.41 kg)	
Operating Temperature	32° to 122°F (0° to 50°C)		
Operating Humidity	5% to 85% relative, non-condensing		
Communication Ports	10/100 baseT Ethernet, USB port		
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series		
Compliance	CE, IC, FCC, UL294		

### Key features



Internet connectivity to the Avigilon Alta access control cloud for system management and communication



Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage



Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring.



Large capacity and plug and play design allows for easy expansion and customization



Includes port interfaces for Relays, Avigilon Readers, REX Sensors, and Contact Sensors



Auxiliary relays and configurable auxiliary input pins provide extra outputs and allow additional sensors or Wiegand devices



EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors



Ships with LifeSafety Power enclosure for security and easy wall mounting

Learn more









8-Door 16-Door
















MSRP from €879

# Avigilon Single Door Controller

The Avigilon Single Door Controller is an access control unit that supports up to two entries and two Avigilon Smart Readers. The Controller securely makes all entry decisions and can be configured via Bluetooth using the Alta Admin App.

### Specifications

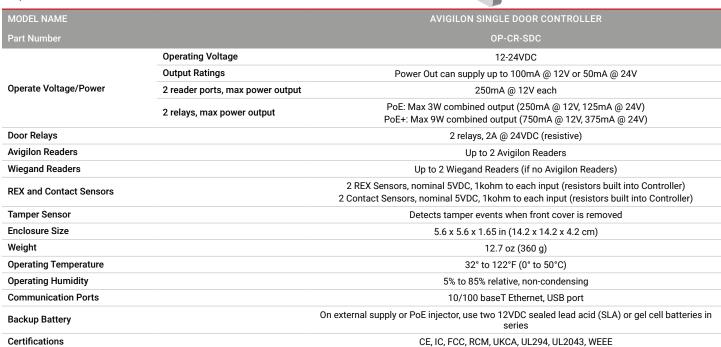

### Key features



Internet connectivity to the Avigilon Alta access control cloud for system management and



Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring



Includes removable contact terminal blocks for convenient wiring



EOL monitoring with single or double termination on all REX, contact, and configurable inputs



Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage



2 Relays, 2 Avigilon Readers, 2 Wiegand Readers, 2 REX Sensors, and 2 Contact Sensors



Physical switches to select relays to be dry or wet (12V or



WiFi-enabled: Supports 2.4 GHz

Learn more







### Avigilon Single Door Controller Accessories

PRODUCT NAME	PART NUMBER
PoE/PoE+ Injector	OP-PI-30W















MSRP from €428

# Avigilon Access Control Core

The Avigilon Access Control Core works with Avigilon expansion boards to securely make all entry decisions. It can support up to 2 expansion boards via USB and supports wireless configuration through the Alta Admin App.

### Specifications



MODEL NAME	AVIGILON ACCESS CONTROL CORE	
Part Number	OP-CR-ACC	
	12-24VDC	
Operate Voltage/Power	0.7A @ 12VDC	
	0.4A @ 24VDC	
Dimensions	2.3 x 3.5 in (5.84 x 8.89 cm)	
Weight	2 oz (57 g)	
Operating Temperature	32° to 122°F (0° to 50°C)	
Operating Humidity	5% to 85% relative, non-condensing	
Interface Ports	0/100 baseT Ethernet, 4 USB ports	
Backup Battery	CR2032 3V, replace every two years	
Compliance	CE, IC, FCC, R0HS, UKCA, UL, WEEE	

### 















# Avigilon Expansion Boards

### MSRP from €656

The Avigilon Expansion Boards are an access control board (no enclosure, no power supply) that connects to the Avigilon Access Control Core (OP-ACC) and supports entries and Avigilon Smart Readers. The Expansion Boards works with the Access Control Core to securely make all entry decisions.

### Specifications







		The state of the s	
MODEL NAME	AVIGILON 4-PORT BOARD	AVIGILON 8-PORT BOARD	AVIGILON 16 I/O ELEVATOR BOARD
Part Number	OP-EX-4E	OP-EX-8E	OP-16EM
Operate Voltage/Power	Must be used with Avigilon Access Control Core 12-24VDC 5A @ 12VDC, 0.3A @ 24VDC	Must be used with Avigilon Access Control Core 12-24VDC .6A @ 12VDC 0.3A @ 24VDC	12-24VDC 12V: 825mA Max (with 2 Avigilon Readers) 12V: 325mA Max (with no readers) 24V: 470mA Max (with 2 Avigilon Readers) 24V: 190mA Max (with no readers)
Relays	4 door relays, 5A @ 24VDC (resistive) 2 auxiliary relays, 1A @ 24VDC	8 door relays, 5A @ 24VDC (resistive) 4 auxiliary relays, 1A @ 24VDC	16 relays, 60VDC Max 24VDC, 1A (resistive) 125VAC, 0.5A (resistive)
Avigilon Readers	Up to 4 Avigilon Readers	Up to 8 Avigilon Readers	Up to 2 Avigilon Readers
REX and Contact Sensors	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary Inputs	4 input lines with EOL monitoring		N/A
Enclosure Size	4.5 x 4.9 in (11.5 x 12.5 cm)	4.5 x 8.75 in (11.5 x 22.5 cm)	Approx 5.25 x 3.5 in (13.34 x 9.04 cm)
Weight	4.3 oz (122 g) 4.3 oz (122 g)		N/A
Operating Temperature	32° to 122°F (0° to 50°C)		
Operating Humidity	5% to 85% relative, non-condensing		
Interface Ports	USB port, Expansion port		USB Port
Backup Battery	Use one or two 12VDC sealed lead acid (SLA) or gel cell batteries based on power supply and system requirements		N/A
Compliance	E, FCC, IC, UL 294, RCM, UKCA		FCC, UL 294, CE

### Key features



Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring



Plug and play design allows for easy expansion and customization



Includes port interfaces for Relays, Avigilon Readers, REX Sensors, and Contact Sensors



Signal relays and configurable auxiliary input pins provide extra outputs and allow additional sensors or Wiegand devices



EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors



Includes removable contact terminal blocks for convenient wiring



configuration via the Alta Admin App using Bluetooth



Lifetime warranty

Learn more







8-Port






















# Avigilon Alta Wireless Lock Integrations

Schlage wireless locks are ideal for interior and low-traffic spaces where installing and maintaining a full door entry system would be cost-prohibitive. The Avigilon Alta integration is easy to set up with a mobile device and no wiring or Avigilon hardware is required, and provides a complete, secure access control experience across any size deployment.



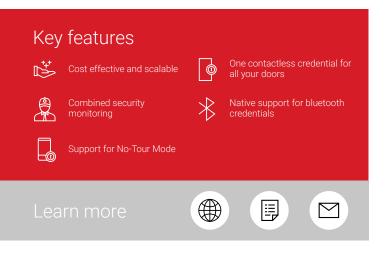















MSRP from €48

# Avigilon Alta Low Frequency (125 kHz) Credentials

The Avigilon Access Low Frequency Credentials are ideal for supporting legacy Wiegand-based access control systems.

### Specifications

MODEL NAME	AVIGILON ALTA PROXIMITY CARDS	AVIGILON ALTA PROXIMITY CARDS AVIGILON ALTA PROXIMITY FOBS	
Part Number	OP-ACL-10	OP-KFL-10	
Form Factor	Solid/prepunched	Key ring	
Format	26-bit (H10301)		
Compatibility	Avigilon Low Frequency Readers Avigilon Smart Reader v2 Avigilon Pro Series Readers Allegion Schlage NDEB and LEB Wireless Locks		

# Avigilon Alta High MSRP from €48 Frequency (13.56 MHz) Credentials

The Avigilon Access Low Frequence Credentials are ideal for high security applications. These high frequency cards and fobs offer additional security against cloning and protects card data confidentiality.

### Specifications

MODEL NAME	AVIGILON ALTA DESFIRE EV3 CARDS	AVIGILON ALTA DESFIRE EV3B FOBS		
Part Number	OP-ACH-EV3P10	OP-KFH-EV3B-10		
Form Factor	Solid/prepunched	Solid/prepunched Key ring		
Format	ISO14443A-4	SO 14443 DESFire Series		
Compatibility	Avigilon Sm Avigilon Pro S	Avigilon High Frequency Readers Avigilon Smart Reader v2 Avigilon Pro Series Readers Allegion Schlage NDEB and LEB Wireless Locks		





For more information, visit avigilon.com



**AVIGILON**