





Tel: +86-10-5083 6847 Email: inquiries@largev.com Website: www.largev.com Address: 800B, Block A, Tongfang Building, Shuangqing Road, Haidian District, Beijing, 100084, P.R. China

This document is provided to you for your information and discussion only. Any information including functions, images or dimensions, may be changed or summarised and is expressed as of the date of writing. The information may change without notice and LargeV Instrument Corp., Ltd. is under no obligation to ensure that such updates are

# ALL IN ONE **HiRes3D Series** PROFESSIONAL **DENTAL CBCT**



CE0197 RoHS NMPA




LARGEV

01

# HiRes3D Series All In One

		Spatial Resolution up to 2.6 lp/mm	Super Large FOV 23×18cm	Multi-FOVs
Low Dose	Metal Artifact Correction	Fine Reconstruction	High- performance AI Reconstruction Algorithm	Implanting Simulation
Small Focal Spot X-ray Tube	High-Sensitivity Detector	Six-dimensional Power Seat	Electric Chin Rest / Forehead Rest	360° Scan
TMJ Mode	Generated Panoramic Images Automatically	S/M/L Three Shooting Modes	3D Facial Scan	Dental Model Scanning


LARGEV

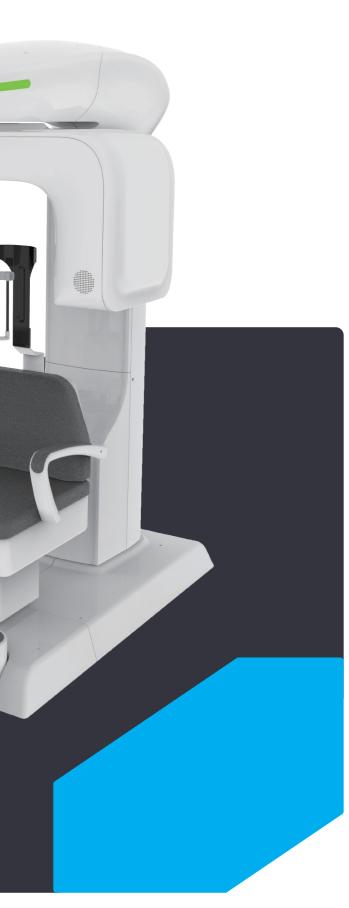

# **Multi-Fovs**

## HiRes3D is an extraordinary dental CBCT with full functions that fulfills a variety of clinical requirements and diagnostic needs.

HiRes3D-Max: An ideal one with the largest FOV to meet the full oral diagnostics needs in oral and maxillofacial surgery. HiRes3D-Plus: An amazing one with the larger FOV and the 3D facial scan system in the orthodontics and plastic surgery. HiRes3D: A classical one with the flexible FOV in the implant dentistry and ENT.

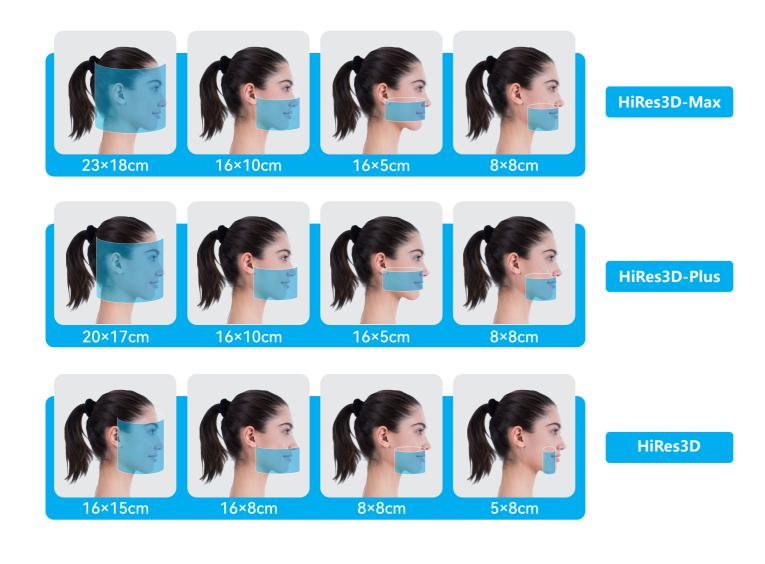



**SUPER-LARGE FOV** Acquires high-definition 3D image after one single scan.



It covers the entire maxillofacial region.


A

**CT/PAN/CEPH** 

05

LARGEV

## 

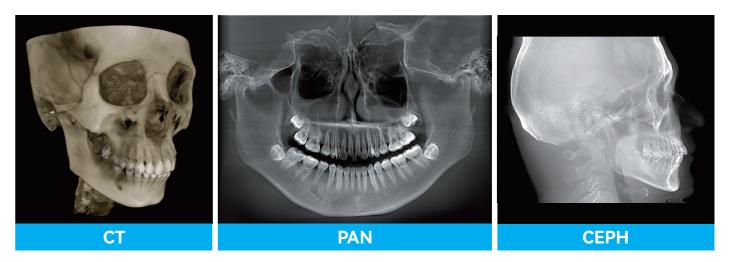



- Rapid reconstruction of high-definition images within 30 seconds
- Super large FOV with no stitching
- Panoramic images generated automatically
- Cephalometric PA and LAT generated automatically



### **3D Facial Scan(Optional)**



◆ 3D facial scan System provides the realistic facial 3D data, which combines with CBCT data.

• Dental model scanning function supports scanning impressions and plaster models. The precision can reach 100  $\mu$ m. It can generate STL 3D digital models for oral implants, orthodontic treatment, etc.

• Small focal spot X-ray tube and high sensitivity detector for high-definition images • S/M/L three shooting modes are optional to respond to the different patients' needs






HD

# **HD** Resolution

- The highest resolution reaches 2.6 lp/mm and the microstructure of the oral cavity can be seen
- ◆ The voxel size is 0.05–0.3mm optional
- Enhanced image by small focal spot X-ray tube
- Detector equipped with HD pixels, high sensitivity and high image acquisition rate
- High-performance AI reconstruction algorithms promote the images to be more precise and faster

It fully explores the perfect balance between image quality and radiation dose. Low dose model provides lower radiation especially for children and elders.

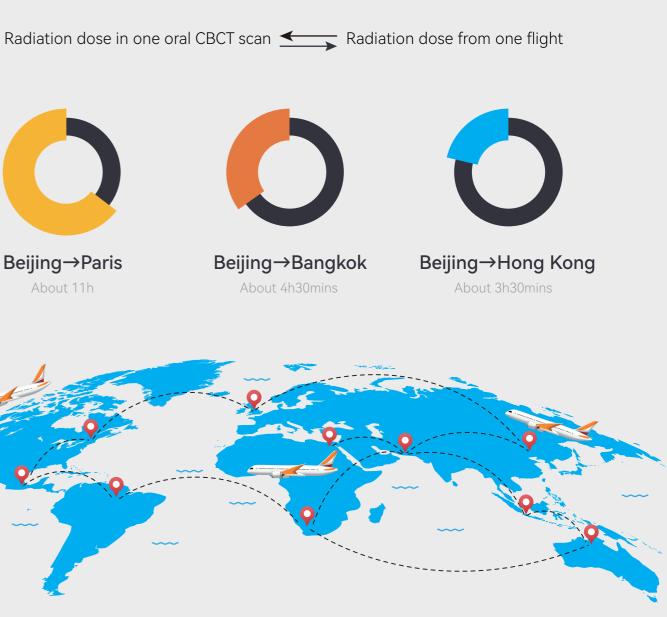
















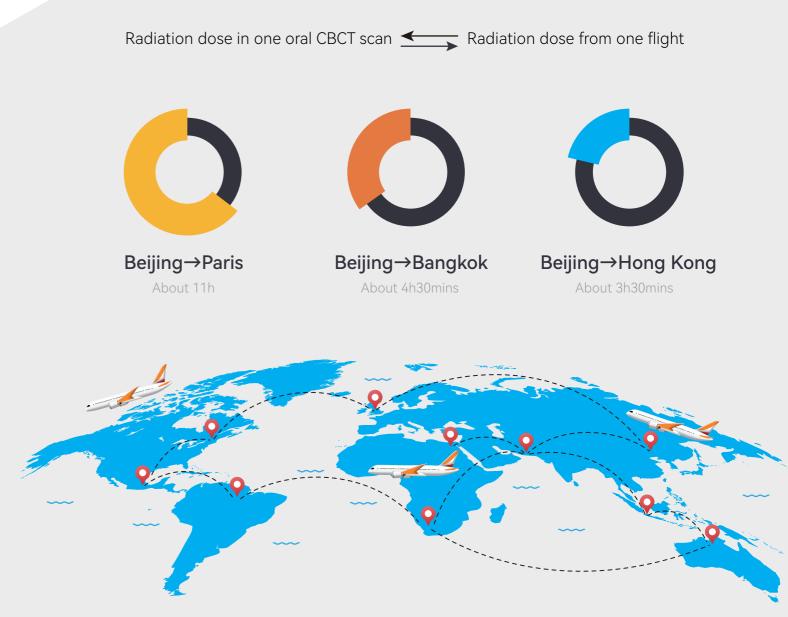

## Low Dose



# Comfortable Experience





### Seated CBCT

- ◆ HiRes3D Series provides face-to-face communication

## Six-dimensional Power Seat

- Effectively reduce motion artifacts, resulting in clearer images
- The movement control precision is up to 0.1mm, which makes the process faster and more stable

## Fully Electric Chin Rest / Forehead Rest

### Composite Fabric Seat

• The 3D laser positioning system is easy to achieve accurate targeting of the scanning area

• Bring patients a relaxed scanning experience, more convenient and more comfortable

• It can avoid soft tissue extrusion while automatically correcting the patient's posture • Provide free switching between chin rest and forehead rest and convenient positioning

• The seat is made of special composite fabric that is soft and breathable, with natural rebound

# SmartVPro Dental radiology software

### 3D Fine Reconstruction


Local fine reconstruction is conducted in the designated area.

### AI+Nerve

The system can label the neural tube automatically in the CT image, providing great convenience for diagnosis.


### Multiple planar Reconstruction

Axial, coronal and sagittal slices can be observed simultaneously. Besides, the slice in any direction is available. Buccolingual slices, distal and mesial sections were obtained to facilitate diagnosis.

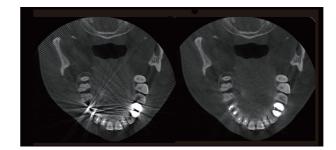


### Metal Artifact Correction

With the new T-MAR correction module for metal artifact removal, the system corrects metal artifacts intelligently. It avoids overmodification and saves the original clinical data.

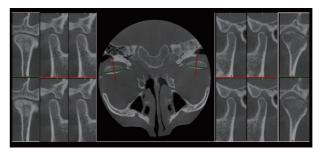

### TMJ Diagnosis

SmartVPro software has a visual pattern of comparing the left and right joints, allowing doctors to evaluate the diagnosis and treatment effect on temporomandibular joint diseases.

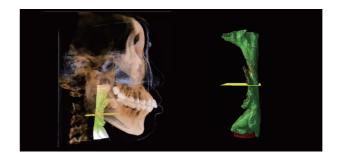

### Airway Measurement


The airway is segmented automatically, which calculates the volume and the narrowest area of the airway.

11




### **Implanting Simulation**

The bone and bone mass in the implant area will be evaluated by dental 3D images using HiRes3D. The neural tube will be highlighted automatically, which presents therelationship between the implant and the neural tube. This is a better way to approach a successful implant surgery.

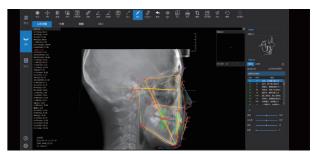

### **CEPH Measurement(Optional)**

The neural network is trained by mega data, which automatically identifies orthodontic anatomical landmark points, draws anatomical structures and outputs measurement reports according to the selected measurement methods.

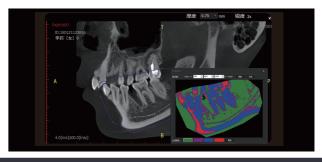


## Regional Statistics

Used to assess bone mineral density in selected areas.

13


# CephPro3D **ORTHODONTIC SOFTWARE**





## VTO

CephPro3D superimposes patient's cephalic images with side photos. It can be fine-tuned through the anchor point to ensure that the image and photos are superimposed completely. Intuitive simulation of the orthodontic effect is generated by one-click.

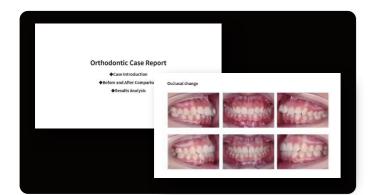

## Orthodontic Case Report

It integrates the basic information of the patients with oral and facial photos at different stages of treatment. Meanwhile, patients' eyes can be covered automatically, which protects their privacy. Case reports can be generated with one-click, which is convenient for doctors to manage orthodontic cases.



## **Customizing Measurement Analysis Methods**

There are 19 measurement methods built into the software, which can be selected by doctors according to the actual clinical situation. Meanwhile, the software supports the optional addition of measurement items and the formation of new measurement methods in any combination, thus facilitating flexible and effective targeted analysis of clinical cases.


### Intelligent Tracking of the Clinical Stage

The overlapping maps at different treatment stages are obtained accurately. It conforms to the standard of the American Board of Orthodontics (ABO), which meets the diagnostic needs. The tracing contrast shows the treatment effect intuitively, promoting smooth communication between doctors and patients.

## Visual Presentation of Report with the Clear Measurement Effect

The report is generated with just one click. It promotes communication between doctors and patients.

# **Clinical Applications**

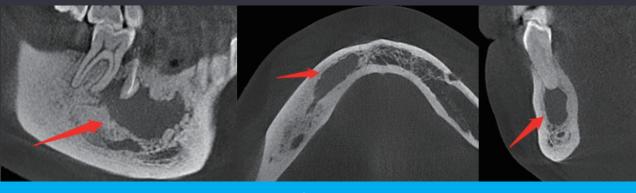

**Examination of Cysts and Tumors** 




**Examination of Root Canal Filling** 




**Examination of Endodontic Diseases** 



Examination of Periodontal Diseases

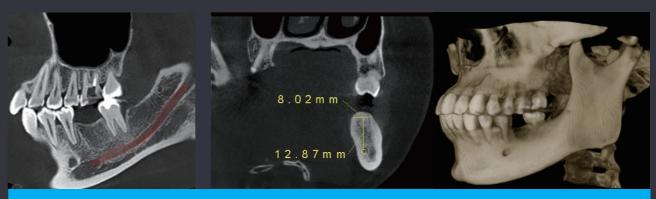


Diagnosis and Planning Design before Implantation

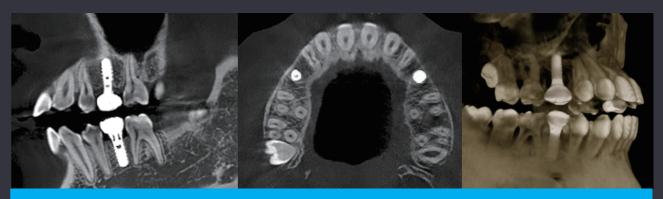

**Evaluation after Implantation** 

# **Clinical Applications**

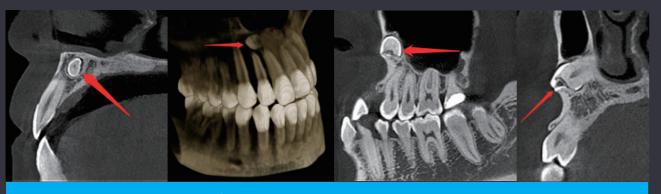

Positioning of Impacted and Supernumerary Tooth



**Examination of Odontoma Ameloblastoma** 




Examination of Jaw Fracture



**Orthodontics Examination** 



Orthognathic Examination

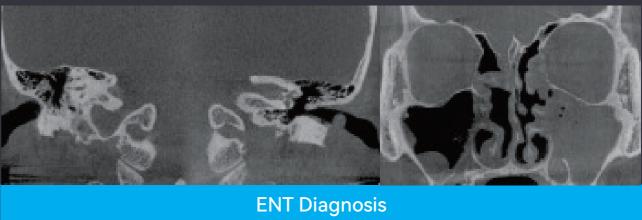

# Milestone

2011 LargeV Instrument Corp., Ltd. was founded on March 11.

2012 HiRes3D, the first seated Chinese CBCT model, was approved to enter the market.

**2013** Passed TüV ISO13485 quality management system certification and CE certification. Achieved the title of "National High-tech Enterprise."

Awarded the first level prize of "Technological Invention" by the Chinese Society 2015 Awarded the first level prize of Technology. The first Chinese CBCT debuted at the International Dental Show (IDS) in Cologne, Germany.

2016 The Multifunction Dental CBCT Smart3D was granted certification from NMPA.

HiRes3D-Plus and HiRes3D-Max, professional dental CBCT models with super-large FOV were certified by NMPA.

Awarded with "Edgy Technology Enterprise" by Beijing Pharmaceutical Profession Association and selected as "Zhongguancun Pioneering Technology Enterprise."

2019

2018

SmartVPro, the first professional dental CBCT radiology software in China, was certified by NMPA. CephPro3D, the first dental cephalometric analysis software, was certified by NMPA.

Zhejiang LargeV Instrument Corp., Ltd. was put into operation.

2021

202

Smart3D-X won the German iF Design Award.

2022

Ultra3D, the world's first CBCT with dual-source and dual-detector was launched. Ultra3D has won the Red Dot Design Award.

# Specifications

Model	HiRes3D	HiRes3D-Plus	HiRes3D-Max		
Field of View (mm x mm)	160 x 150 160 x 80 80 x 80 50 x 80	200 x 170 160 x 100 160 x 50 80 x 80	230 x 180 160 x 100 160 x 50 80 x 80		
Voxel Size (mm)	0.25 0.25 / 0.125 0.125 / 0.0625 0.1 / 0.05	0.3 0.25 / 0.125 0.2 / 0.1 0.125 / 0.0625	0.3 / 0.15 0.25 / 0.125 0.2 / 0.1 0.125 / 0.0625		
Spatial Resolution	2.6 lp/mm	2.4 lp/mm	2.2 lp/mm		
Reconstruction Time	≤ 30 s	≤ 40 s	≤ 40 s		
Tube Current (mA)	min: 2 max: 10 (60 kV)				
Tube Voltage (kV)	min: 60 max: 100 (6 mA)				
Scan Time	25 / 12.5 / 15.625 / 18.75 (s)		12.5 / 12.5 / 15.625 / 18.75 (s)		
Focal Spot Size	0.5 (IEC60336)				
Sensor Type	CMOS Flat Panel Detector	α-Si Flat Panel Detector			
Sensor Size	13 cm x 13 cm	16 cm x 16 cm	26 cm × 21 cm		
Unit Dimensions	1825 × 1077 × 2109 mm (5.99 × 5.53 × 6.92 ft)				
Weight	340 kg (749.57 lb)				
Packing Size	Case 1: L,1930 × W,800 × H,1300 mm (6.33 × 2.62 × 4.27 ft)304 kg (888.46 lb)Case 2: L,1970 × W,1270 × H,1170 mm (6.46 × 4.17 × 3.84 ft)290 kg (639.34 lb)				
Power	single-phase, AC220V/230V, ±10%, 10A, 50Hz/60Hz, ±1Hz				

%The data are subject to change without notice



## HiRes3D Series

